

1

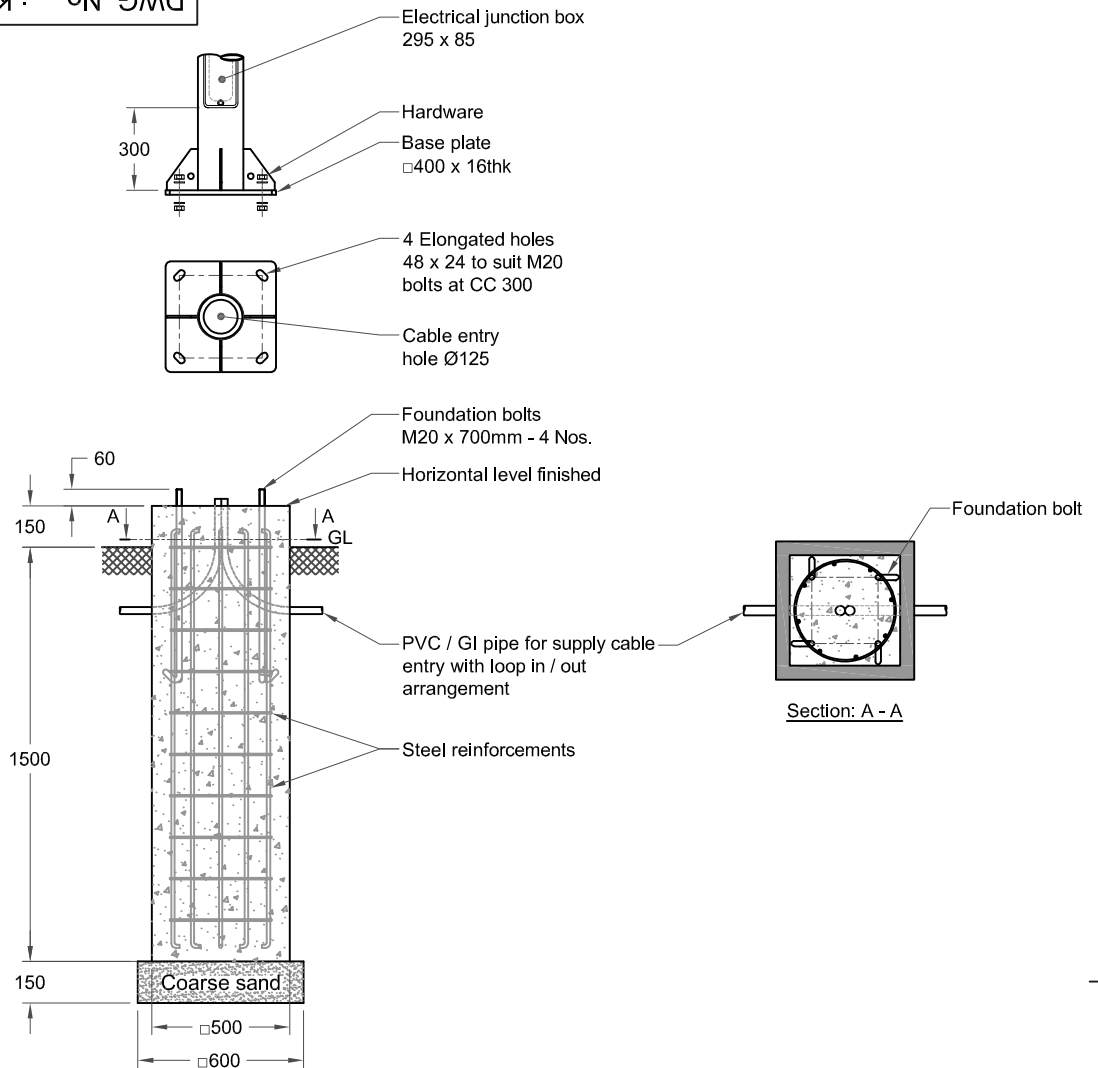
2 IF IN DOUBT ASK. DO NOT SCALE.

3

4

DWG. No. : KP-DFD-068
SHEET No. : 1 of 1

ALL DIMENSIONS ARE IN mm

**Note :**

- Typical foundation drawing for standard soil condition.
- Parameters considered in RCC foundation design :

Load bearing capacity of soil (LBC)	: 10 Mt/m ² (Min)
Basic wind speed	: 50 m/s
Grade of steel reinforcement	: Fe 415
Grade of foundation bolt	: 4.6
- Height of foundation above ground level (150mm) may be revised to suit the site conditions especially considering the expected water level stagnation.
- Template supplied is suggested to be used for locating the CC of foundation bolts.
- 4 Nos. of foundation bolt have to be oriented (located), while casting the foundation such that the door of the electrical junction box faces the required direction.
- PVC / GI pipe for entry of supply cable and the materials required for foundation are not scope of our supply.

02.	DESIGN REVISED	19-03-18	SATHISH		
01.	COMPANY NAME REVISED	24-11-16	SATHISH		
REV. No.	REVISION DETAILS	DATE	REVISED	CHD	APPD

DRAWN THIRUPATHI	CHECKED	APPROVED	DATE 23-01-15	SCALE 1 : 28	MATERIAL -	Z:\KP\005.FOUNDATION DETAILS\KP - DFD - 068\REV 02.dwg				
		K-LITE INDUSTRIES CHENNAI - 600 098				DETAILED FOUNDATION DRAWING FOR KP - 22 □400 x 16 (FOUNDATION BOLT M20 x 700)				
							DRG. NO. KP-DFD-068	REV 02	SHEET 1 of 1	

1

2

3

4