

1


2 IF IN DOUBT ASK. DO NOT SCALE.

3

4

DWG. No. : KP-DFD-016  
SHEET No. : 1 of 1

ALL DIMENSIONS ARE IN mm

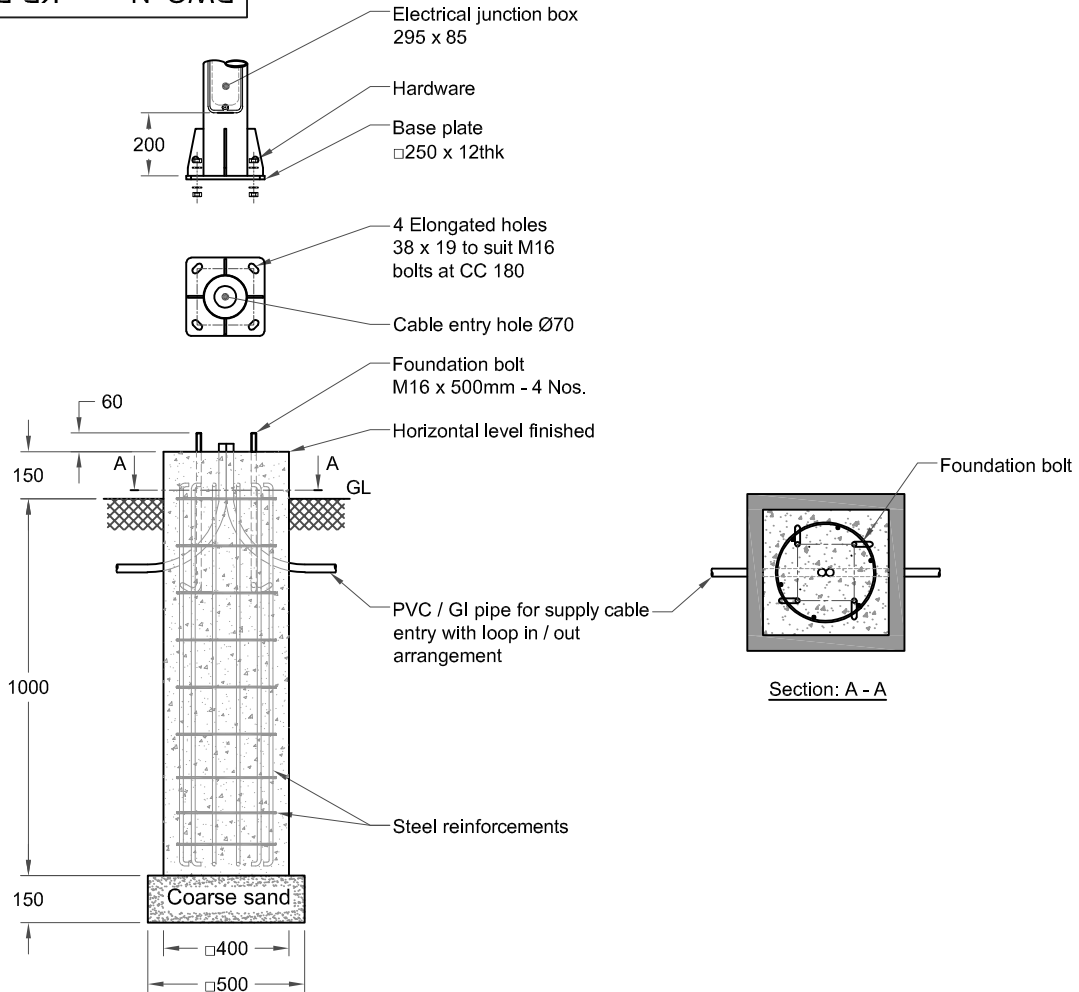

**Note :**

- Typical foundation drawing for standard soil condition.
- Parameters considered in RCC foundation design :  
Load bearing capacity of soil (LBC) : 10 Mt/m<sup>2</sup> (Minimum)  
Basic wind speed : 50 m/s  
Grade of steel reinforcement : Fe 415  
Grade of foundation bolt : 4.6
- Height of foundation above ground level (150mm) may be revised to suit the site conditions especially considering the expected water level stagnation.
- Template supplied is suggested to be used for locating the CC of foundation bolts.
- 4 Nos. of foundation bolt have to be oriented (located), while casting the foundation such that the door of the electrical junction box faces the required direction.
- PVC / GI pipe for entry of supply cable and the materials required for foundation are not scope of our supply.

03.	CABLE ENTRY HOLE REVISED	03-02-18	BASKAR		
02.	DESIGN REVISED	24-01-17	SATHISH		
01.	ELECTRICAL JUNCTION BOX DOOR SIZE REVISED	18-03-16	SELVA		
REV. No.	REVISION DETAILS	DATE	REVISED	CHD	APPD

DRAWN THIRUPATHI	CHECKED	APPROVED	DATE 05-03-15	SCALE 1 : 25	MATERIAL -
---------------------	---------	----------	------------------	-----------------	---------------

Z:\KP\005.FOUNDATION DETAILS\KP - DFD - 016\REV 03.dwg



**K-LITE INDUSTRIES**

CHENNAI - 600 058

DETAILED FOUNDATION DRAWING FOR KP - 29  
□250 x 12 (FOUNDATION BOLT M16 x 500)



DRG. NO.

KP-DFD-016

REV  
03

SHEET  
1 of 1

1

2

3

4