




LED Down Lighters

India's Lighting Company




Diva

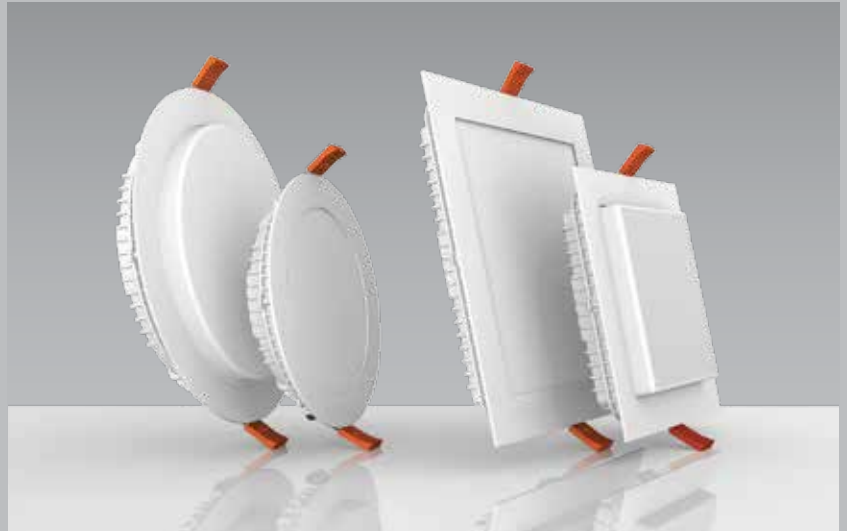

Gemma



Varsha

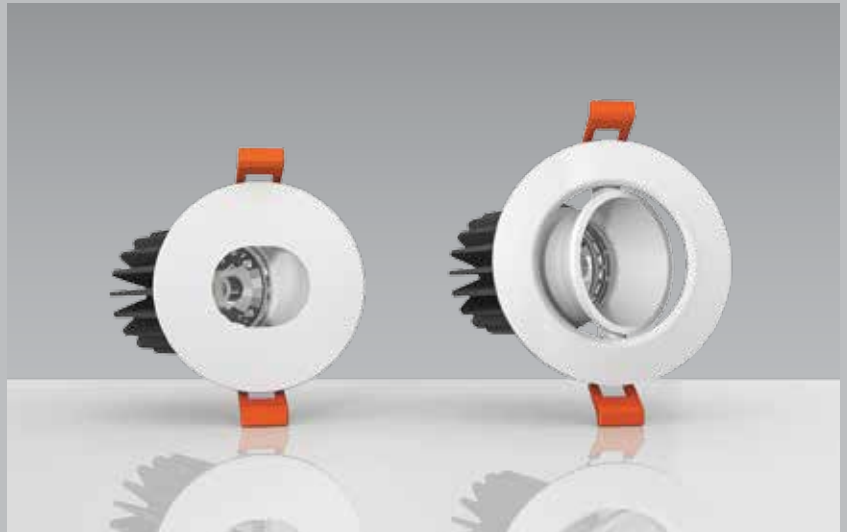

Diva LED Ultra Slim Down Light




"Diva" recess mounted range of LED ceiling lights are a perfect fit for varied lighting applications. The die cast aluminium housing is ideal for better thermal management. High lumen output / Different wattage & CCT options available make this versatile for superior glare free indoor lighting solutions.

Compact Size . Optimum Performance



beyond

light

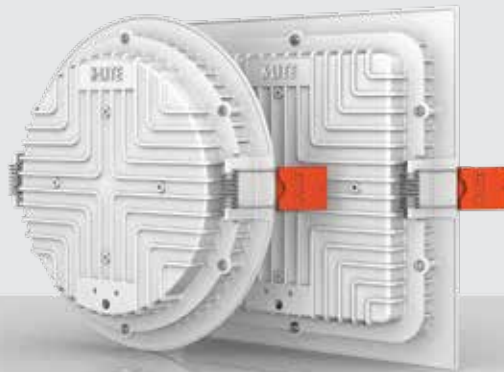

Die cast body for better thermal performance

Benefits :

- Excellent efficiency for high energy savings of up to 80% compared to CFL downlights.
- Replacement of existing CFL downlights with even better performance.
- Very low mounting depth.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.

Diva Round





7671 / 7665



7666



7667

ID	Wattage	Colour	Lumen			Fixed	Dimension (D x H) mm	Cutout (mm)	
			WW	NW	CW				
7671	6W LED	WW / NW / CW	418 lm	587 lm	501 lm		Ø120 x 28	Ø107	
7665	10W LED	WW / NW / CW	628 lm	759 lm	644 lm		Ø120 x 28	Ø107	
7666	18W LED	WW / NW / CW	1325 lm	1416 lm	1343 lm		Ø170 x 28	Ø157	
7667	26W LED	WW / NW / CW	2142 lm	2318 lm	2148 lm		Ø225 x 28	Ø206	

Diva Square





7672 / 7668



7669



7670

ID	Wattage	Colour	Lumen			Fixed	Dimension (D x H) mm	Cutout (mm)	
			WW	NW	CW				
7672	6W LED	WW / NW / CW	410 lm	523 lm	473 lm		□120 x 28	□107	
7668	10W LED	WW / NW / CW	648 lm	683 lm	660 lm		□120 x 28	□107	
7669	18W LED	WW / NW / CW	1300 lm	1430 lm	1316 lm		□170 x 28	□157	
7670	26W LED	WW / NW / CW	2275 lm	2462 lm	2280 lm		□225 x 28	□206	

Specification

- Recess mounting, DIVA LED ultra slim down lighter is the perfect fit for all indoor lighting applications.
- The housing is constructed from die-cast aluminium for better thermal management finished with white epoxy polyester powder coating.
- High efficiency diffuser for glare free, uniform light distribution.
- High lumen output, Integrated with SMD 2835 LEDs.
- High PF constant current LED driver with surge and thermal protection.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ideal for super low depth space constraint false ceiling.
- IP20 Protected.
- Ordering guide : KL-7665-CCT (Colour Temperature)
- Available CCT WW : Warm White (3000K), CW : Cool White (6000K), NW : Neutral White (4000K).
- Warranty : 2 years.



Application

- Lobbies & Foyers
- Residential & Educational premises
- Retail Sector
- Commercial & Business Centers
- Corporate Office
- Hospitality Industry
- Airports & Hospitals
- Interior Traffic areas





Compact Size . Optimum Performance

"Diva 7" recess mounted range of LED ceiling lights are ideal for LG7 compliance lighting applications. The die cast aluminium housing for better thermal management. High lumen output / Different wattage & CCT options available make this versatile for superior glare free indoor lighting solutions. The diffuser is designed to comply with LG7 lighting requirement.



Diva 7 LED Down Light Series

LG 7 Compliant

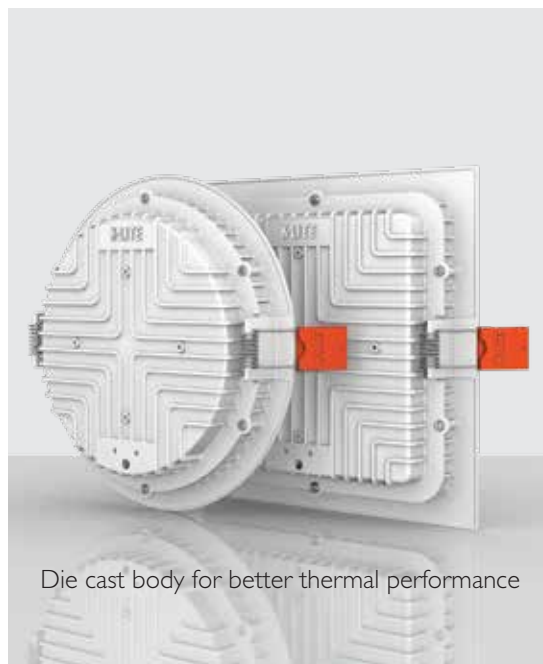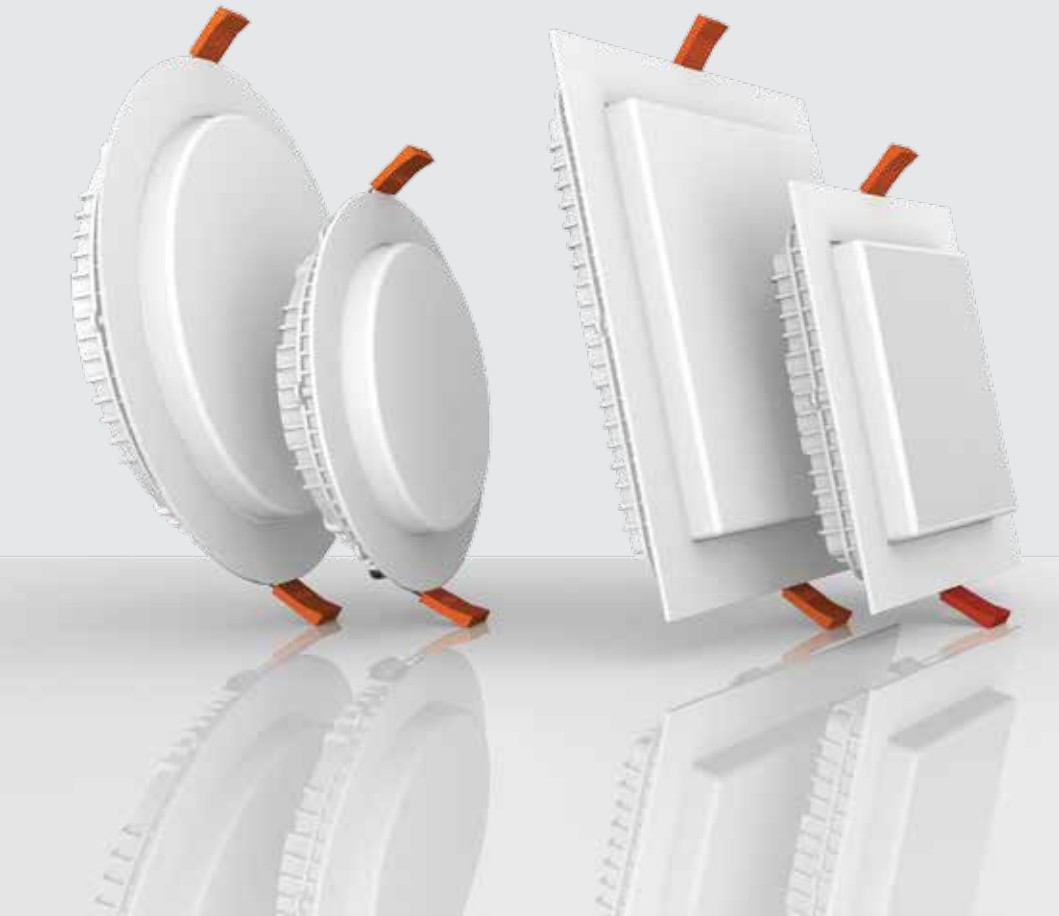

Die cast body for better thermal performance

Benefits :

- Excellent efficiency for high energy savings of up to 80% compared to CFL downlights.
- Replacement of existing CFL downlights with even better performance.
- Very low mounting depth.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.

Diva 7 Round



7246 / 7247



7248



7249

ID	Wattage	Colour	Lumen			Fixed	Dimension (D x H) mm	Cutout (mm)	
			WW	NW	CW				
7246	6W LED	WW / NW / CW	418 lm	587 lm	501 lm		Ø120 x 36	Ø107	
7247	10W LED	WW / NW / CW	628 lm	759 lm	644 lm		Ø120 x 36	Ø107	
7248	18W LED	WW / NW / CW	1325 lm	1416 lm	1343 lm	Ø170 x 40	Ø157		
7249	26W LED	WW / NW / CW	2142 lm	2318 lm	2148 lm	Ø225 x 40	Ø206		

Diva 7 Square



7250 / 7251



7252



7253

ID	Wattage	Colour	Lumen			Fixed	Dimension (D x H) mm	Cutout (mm)	
			WW	NW	CW				
7250	6W LED	WW / NW / CW	410 lm	523 lm	473 lm		□120 x 36	□107	
7251	10W LED	WW / NW / CW	648 lm	683 lm	660 lm		□120 x 36	□107	
7252	18W LED	WW / NW / CW	1300 lm	1430 lm	1316 lm	□170 x 40	□157		
7253	26W LED	WW / NW / CW	2275 lm	2462 lm	2280 lm	□225 x 40	□206		

Specification

- Recess mounting, DIVA 7 LED down lighter is the perfect fit for all indoor lighting applications.
- The housing is constructed from die-cast aluminium for better thermal management finished with white epoxy polyester powder coating.
- The specially designed LG7 diffuser is a unique combination of high light transmission through optimized diffuser technologies.
- High lumen output, Integrated with SMD 2835 LEDs.
- High PF constant current LED driver with surge and thermal protection.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ideal for super low depth space constraint false ceiling.
- IP20 Protected.
- Ordering guide : KL-7252-CCT (Colour Temperature)
- Available CCT WW : Warm White (3000K), CW : Cool White (6000K), NW : Neutral White (4000K).
- Warranty : 2 years.

Application

- Lobbies & Foyers
- Residential & Educational premises
- Retail Sector
- Commercial & Business Centers
- Corporate Office
- Hospitality Industry
- Airports & Hospitals
- Interior Traffic areas



Compact Size . Optimum Performance



Gemma / Varsha
LED Down Lighters



Gemma Round




7656



7657



7658



ID	Wattage	Colour	LED Brand	Fixed / Tilttable	Beam Angle	Dimension (D x H) mm	Cutout (mm)	
7656	10W LED	WW / NW / CW	CREE		24°	Ø85 x 65	Ø75	
7657	15W LED	WW / NW / CW			24°	Ø108 x 86	Ø98	
7658	25W LED	WW / NW / CW			24°	Ø145 x 104	Ø130	

Gemma Square



7659



7660



7661



ID	Wattage	Colour	LED Brand	Fixed / Tilttable	Beam Angle	Dimension (D x H) mm	Cutout (mm)	
7659	10W LED	WW / NW / CW	CREE		24°	□85 x 65	Ø75	
7660	15W LED	WW / NW / CW			24°	□108 x 86	Ø98	
7661	25W LED	WW / NW / CW			24°	□145 x 104	Ø130	

Varsha - Oval




7244



7243

Varsha



ID	Wattage	Colour	LED Brand	Fixed / Tilttable	Beam Angle	Dimension (D x H) mm	Cutout (mm)	
7244	10W LED	WW / NW / CW	CREE		24° Lens / 36° Optics	Ø92 x 90	Ø84	
7243	10W LED	WW / NW / CW			24° Lens / 36° Optics	Ø106 x 90	Ø95	

Ordering guide : KL-7244-CCT-Beam Angle



Application

- Lobbies & Foyers
- Retail Sector
- Traffic areas
- Corridors
- Hospitality Industry
- Commercial & Business Centers
- Residential & Educational premises
- Corporate

Specification

- The housing is constructed from die-cast aluminium for better thermal management finished with epoxy polyester powder coating white.
- Pressure die-cast aluminium inner adjustable ring with reflector for uniform light distribution.
- High PF constant current LED driver with surge and thermal protection.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- IP20 Protected.
- Ordering guide : KL-7659-CCT (ColourTemperature)
- Available CCT WW : Warm White (3000K), CW : Cool White (6000K), NW : Neutral White (4000K).
- Warranty : 2 years.



 Klite's eco-friendly initiative

Eco shipping

We do everything we can, to ship your order in the most environmentally responsible way possible. Project packing available. We are also constantly searching for the most innovative solutions for eco-conscious shipping.



K-LITE INDUSTRIES **India's Lighting Company**

D-10, Ambattur Industrial Estate, Chennai - 600 058
Tel : 26257710, 42281950. Fax : 26257866
Cell : 95000 79797, 95000 85511.
Email : info@klite.in Website : www.klite.in

FACTORY Display Centres

- G6 & G8, Ambattur Industrial Estate, Chennai - 600 058
- 28, Khader Nawaz Khan Road, Nungambakkam, Chennai - 600 034

Delhi

- 928, Shop No. 2, Khasra No. 402, Main MG Road, Ghitorni, New Delhi - 110 030 (Opposite Metro Pillar 118) Tel : 011-2650 2044.