
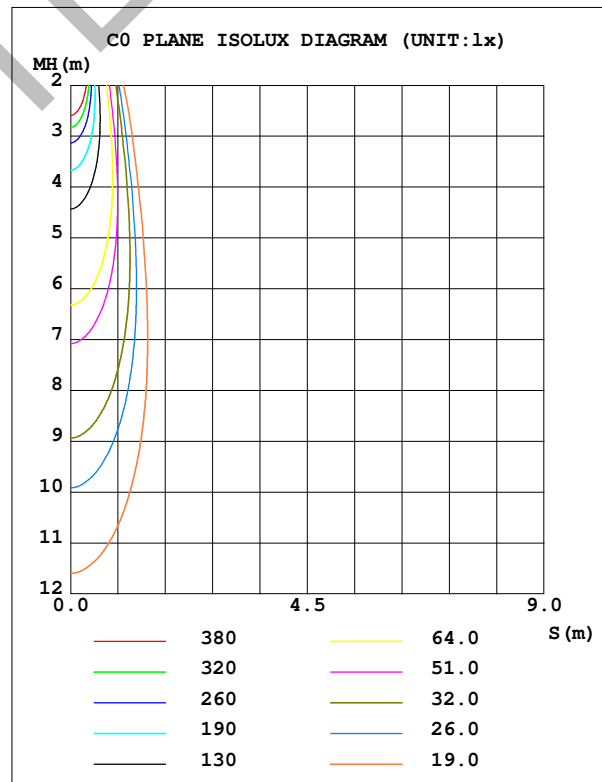


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.47V I:0.0285A P:6.3323W PF:0.9652 Freq:49.98Hz Lamp Flux:787.95x1 lm		
NAME: NEBULA MINI - BRACKET	TYPE:LANDSCAPE LUMINAIRES	WEIGHT:
SPEC.:NW, CREE	DIM.: 101 x 64 x 93	SERIAL No.:3281
MFR.: K-LITE	SUR.:	Shielding Angle:15°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 70.48 lm/W
MODEL	KL-4266	I _{max} (cd)	2563	S/MH (C0/180)	0.34	
NOMINAL POWER (W)	6	LOR (%)	56.6	S/MH (C90/270)	0.34	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	446.28	η UP, DN (C0-180)	0.0, 27.5	
NOMINAL FLUX (lm)	787.95	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 29.2	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	56.6	CIBSE SHR MAX	1.00	

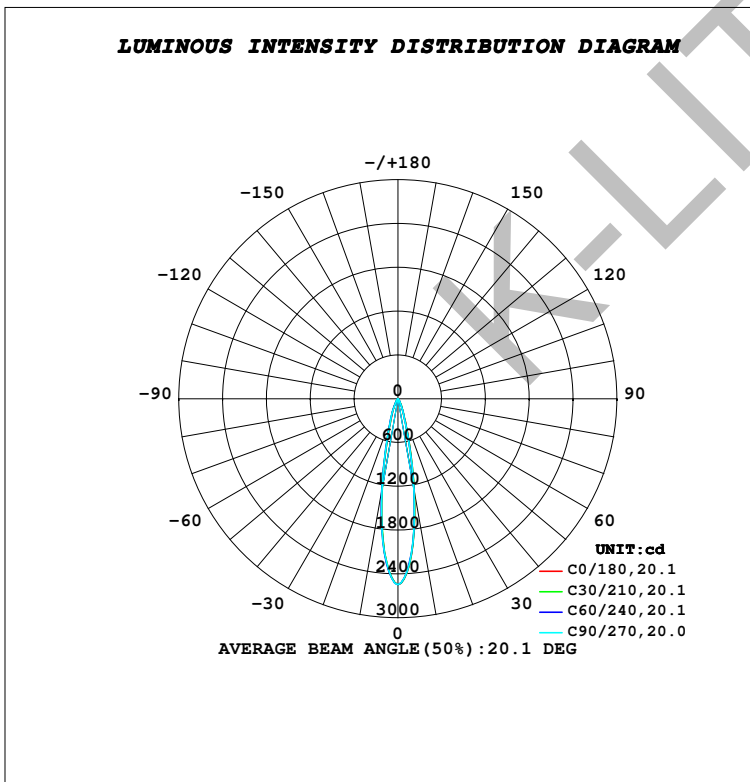

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 25 June 2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: