


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.51V I:0.0308A P:6.5002W PF:0.9572 Freq:49.98Hz Lamp Flux:902.55x1 lm		
NAME: WALL CYLIN MINI	TYPE:WALL LUMINAIRES	WEIGHT:
SPEC.:WW, CITIZEN	DIM.: 145 x 100 x 150	SERIAL No.:2192
MFR.: K-LITE	SUR.:	Shielding Angle:25°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-7897	Imax (cd)	1641	S/MH (C0/180)	0.48
NOMINAL POWER (W)	6	LOR (%)	56.7	S/MH (C90/270)	0.46
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	511.79	η UP, DN (C0-180)	0.0, 28.4
NOMINAL FLUX (lm)	902.55	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 28.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	56.7	CIBSE SHR MAX	0.50

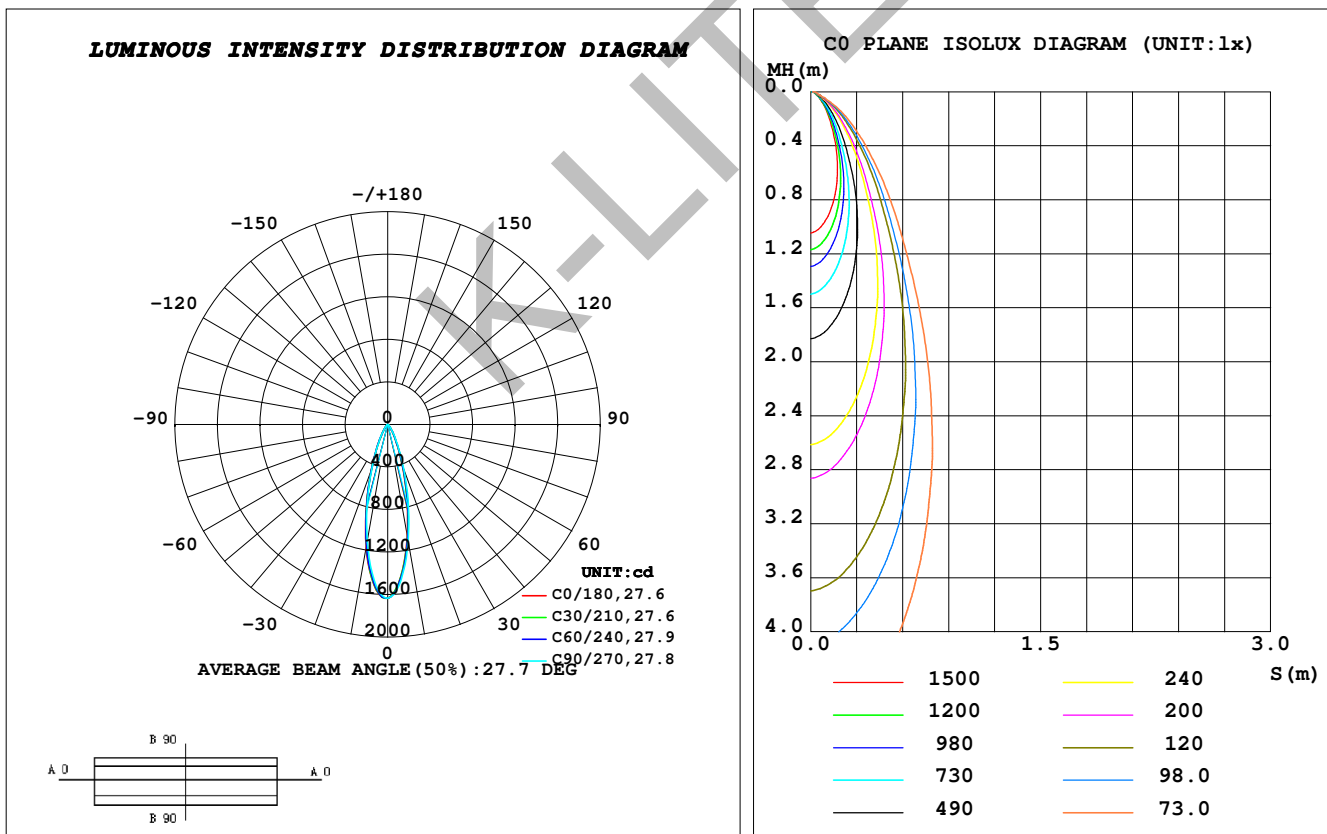

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 29 October 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: