
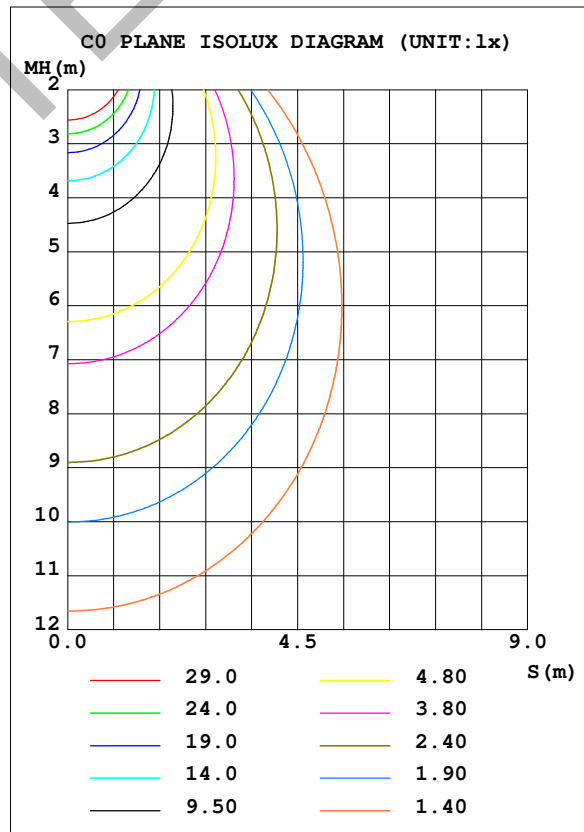


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.37V I:0.1344A P:12.927W PF:0.4176 Freq:49.99Hz Lamp Flux:1608.9x1 lm		
NAME: WALL GRAZER	TYPE:LINEAR IN-GROUND	WEIGHT:
SPEC.:WW, LUMILED	DIM.: 550 x 68 x 83	SERIAL No.:2127
MFR.: K-LITE	SUR.:	Shielding Angle:100°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3276	Imax (cd)	190.9	S/MH (C0/180)	1.18
NOMINAL POWER (W)	12	LOR (%)	28.7	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	461.02	η UP, DN (C0-180)	0.0,13.2
NOMINAL FLUX (lm)	1608.9	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,15.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	28.6	CIBSE SHR MAX	1.35

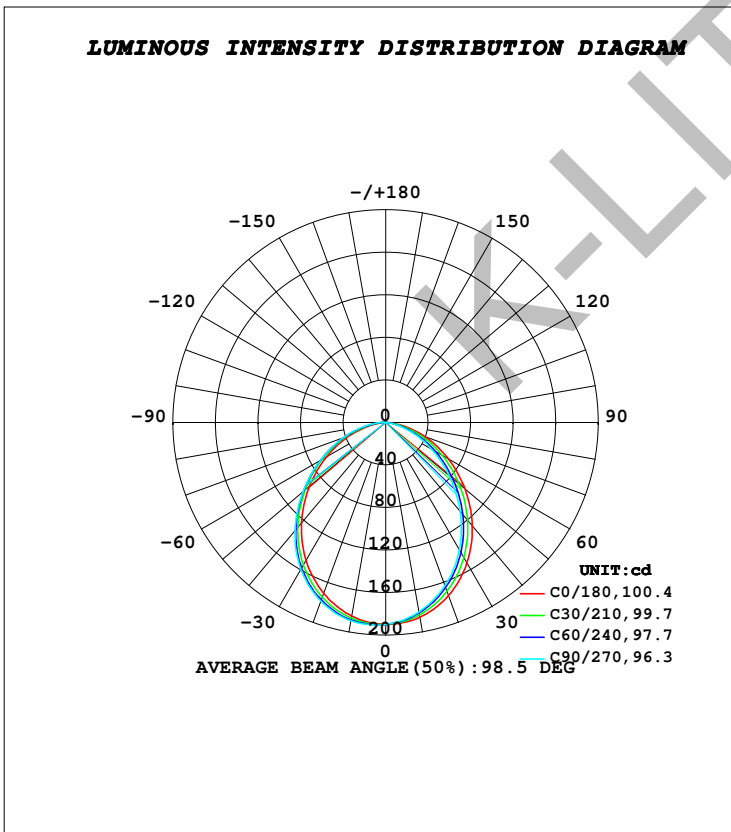

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 16 October 2020

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: