


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.73V I:0.0513A P:6.0334W PF:0.5099 Freq:49.99Hz Lamp Flux:748.8x1 lm		
NAME: NEBULA MINI - BRACKET	TYPE:LANDSCAPE LUMINAIRES	WEIGHT:
SPEC.:WW, LUMILED, BA-40°	DIM.: 101 x 64 x 93	SERIAL No.:4786
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4266	I <sub>max</sub> (cd)	1181	S/MH (C0/180)	0.52
NOMINAL POWER (W)	6	LOR (%)	55.4	S/MH (C90/270)	0.53
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	415.20	η UP, DN (C0-180)	0.0, 27.8
NOMINAL FLUX (lm)	748.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 27.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	55.4	CIBSE SHR MAX	0.55

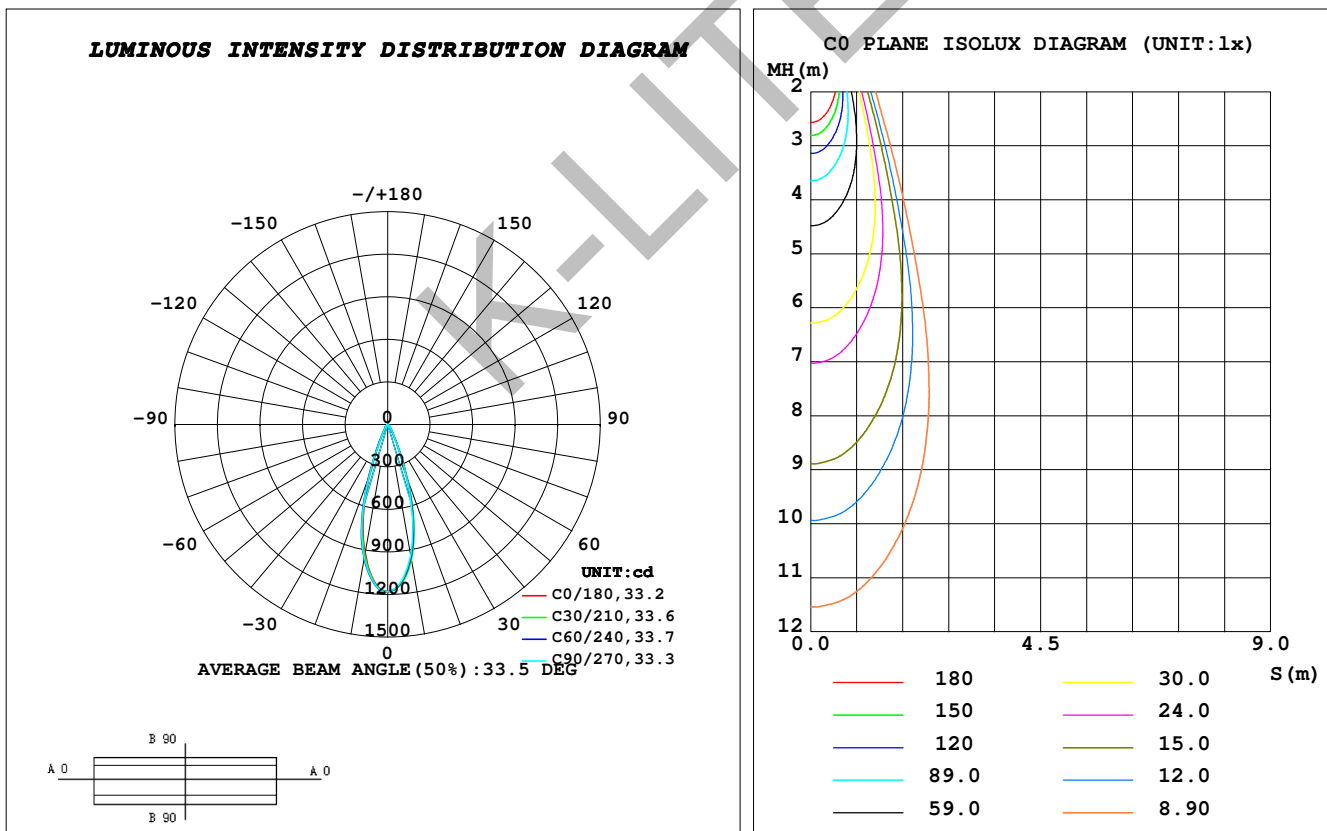

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 16 August 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**