


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.82V I:1.0650A P:239.58W PF:0.9788 Freq:50.19Hz Lamp Flux:31599x1 lm		
NAME: POLAR HIGH BAY 4	TYPE: INDUSTRIAL LUMINAIRES	WEIGHT:
SPEC.: WW, LUMILED	DIM.: 342 x 315 x 245	SERIAL No.: 3731
MFR.: K-LITE	SUR.:	Shielding Angle: 40°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 123.17 lm/W			
MODEL	KL-3098	I _{max} (cd)	75416	S/MH (C0/180)	0.55
NOMINAL POWER (W)	4 x 60	LOR (%)	93.4	S/MH (C90/270)	0.53
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	29510	η UP, DN (C0-180)	0.0, 45.3
NOMINAL FLUX (lm)	31599	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 48.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	93.4	CIBSE SHR MAX	0.50

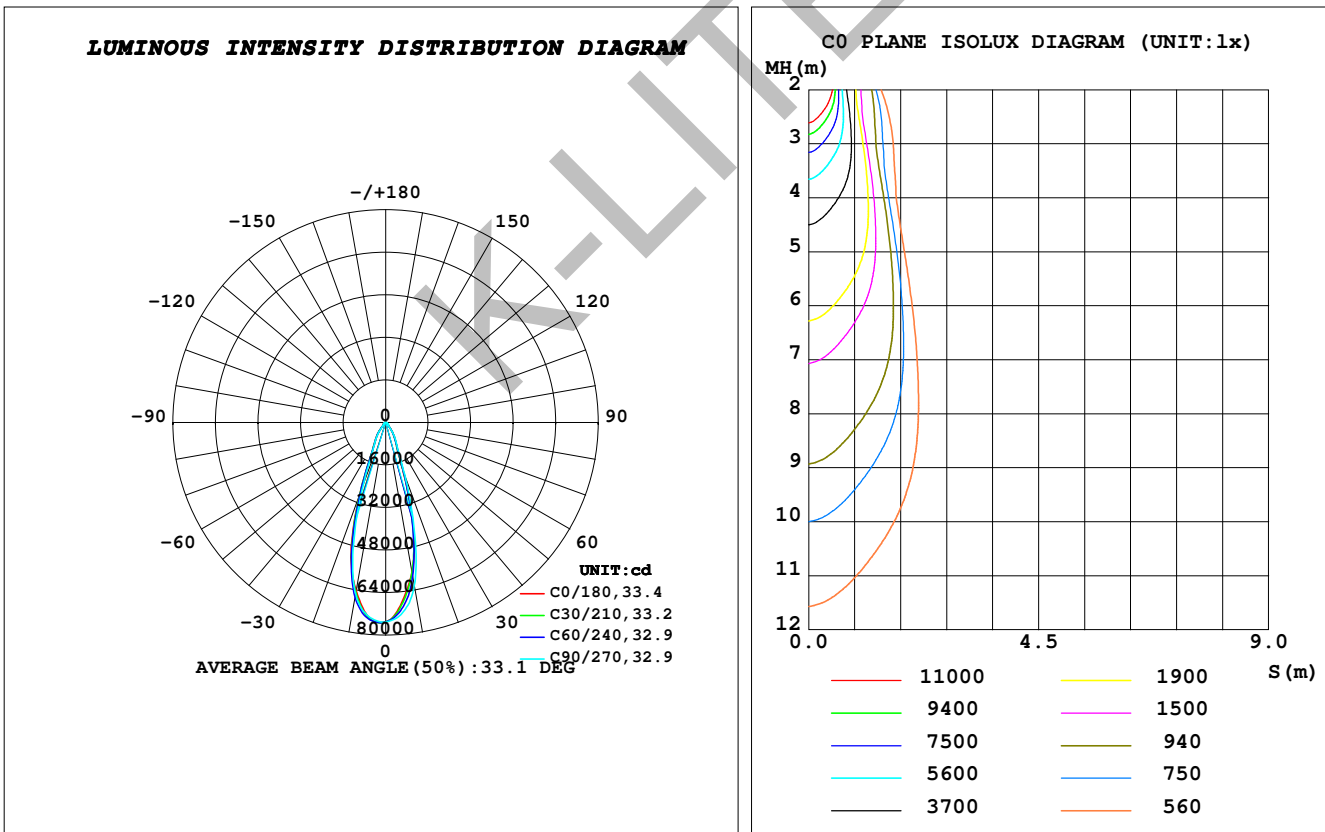

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 03 November 2021

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: