


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.78V I:1.0602A P:238.41W PF:0.9787 Freq:50.19Hz Lamp Flux:32326x1 lm		
NAME: POLAR HIGH BAY 4	TYPE:INDUSTRIAL LUMINAIRES	WEIGHT:
SPEC.:NW, LUMILED	DIM.: 342 x 315 x 245	SERIAL No.:3730
MFR.: K-LITE	SUR.:	Shielding Angle:40°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 133.61 lm/W			
MODEL	KL-3098	I _{max} (cd)	76009	S/MH (C0/180)	0.55
NOMINAL POWER (W)	4 x 60	LOR (%)	98.5	S/MH (C90/270)	0.57
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	31853	η UP, DN (C0-180)	0.0, 46.5
NOMINAL FLUX (lm)	32326	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 52.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	98.5	CIBSE SHR MAX	0.55

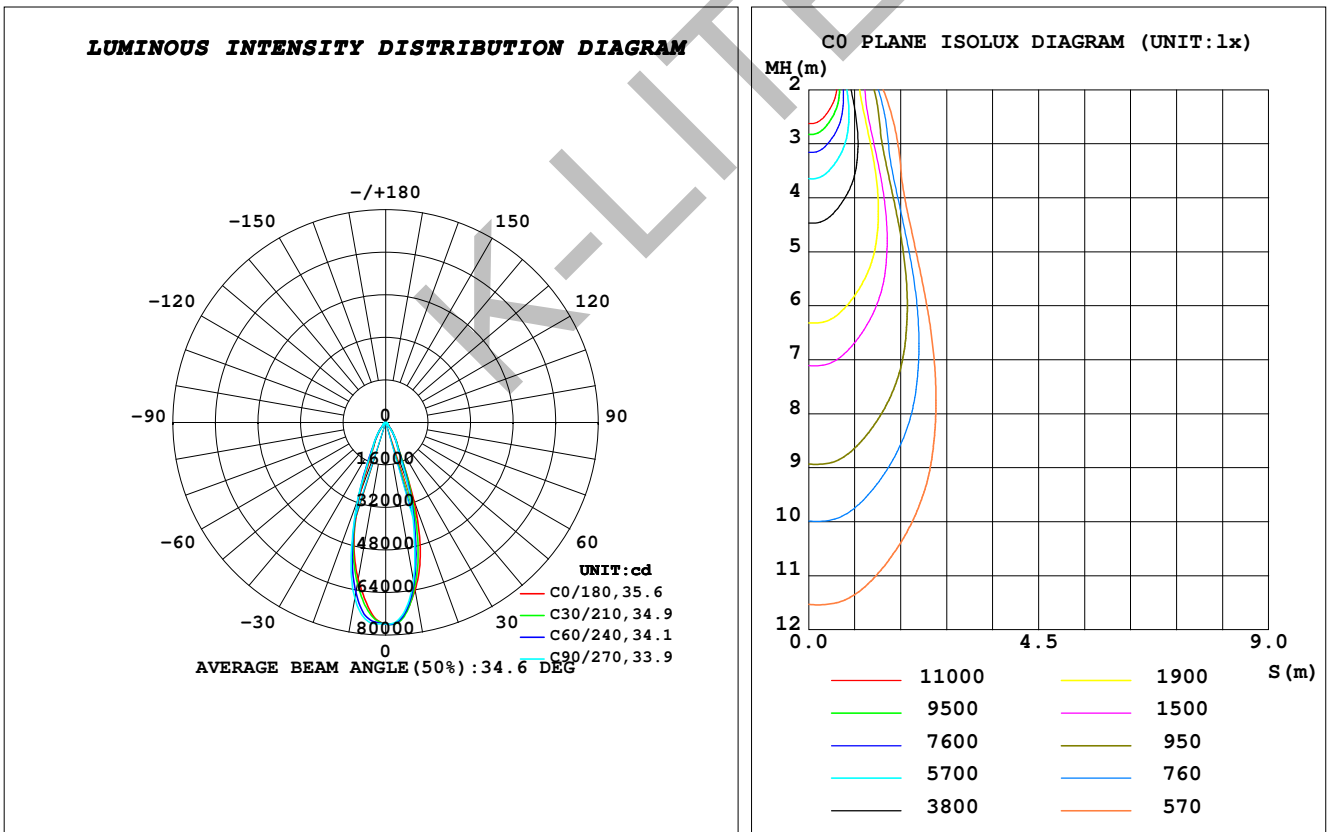

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 03 November 2021

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: