


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.11V I:0.1628A P:36.610W PF:0.9775 Freq:49.99Hz Lamp Flux:5345x1 lm		
NAME: JUNO MIDI	TYPE:PENDANT LUMINAIRES	WEIGHT:
SPEC.:NW, NICHIA	DIM.: Ø420 x 80	SERIAL No.:1158
MFR.: K-LITE	SUR.:	Shielding Angle:120°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3022	Imax (cd)	1026	S/MH (C0/180)	1.19
NOMINAL POWER (W)	36	LOR (%)	49.5	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2643.3	η UP, DN (C0-180)	0.0, 24.6
NOMINAL FLUX (lm)	5345	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 24.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	49.5	CIBSE SHR MAX	1.35

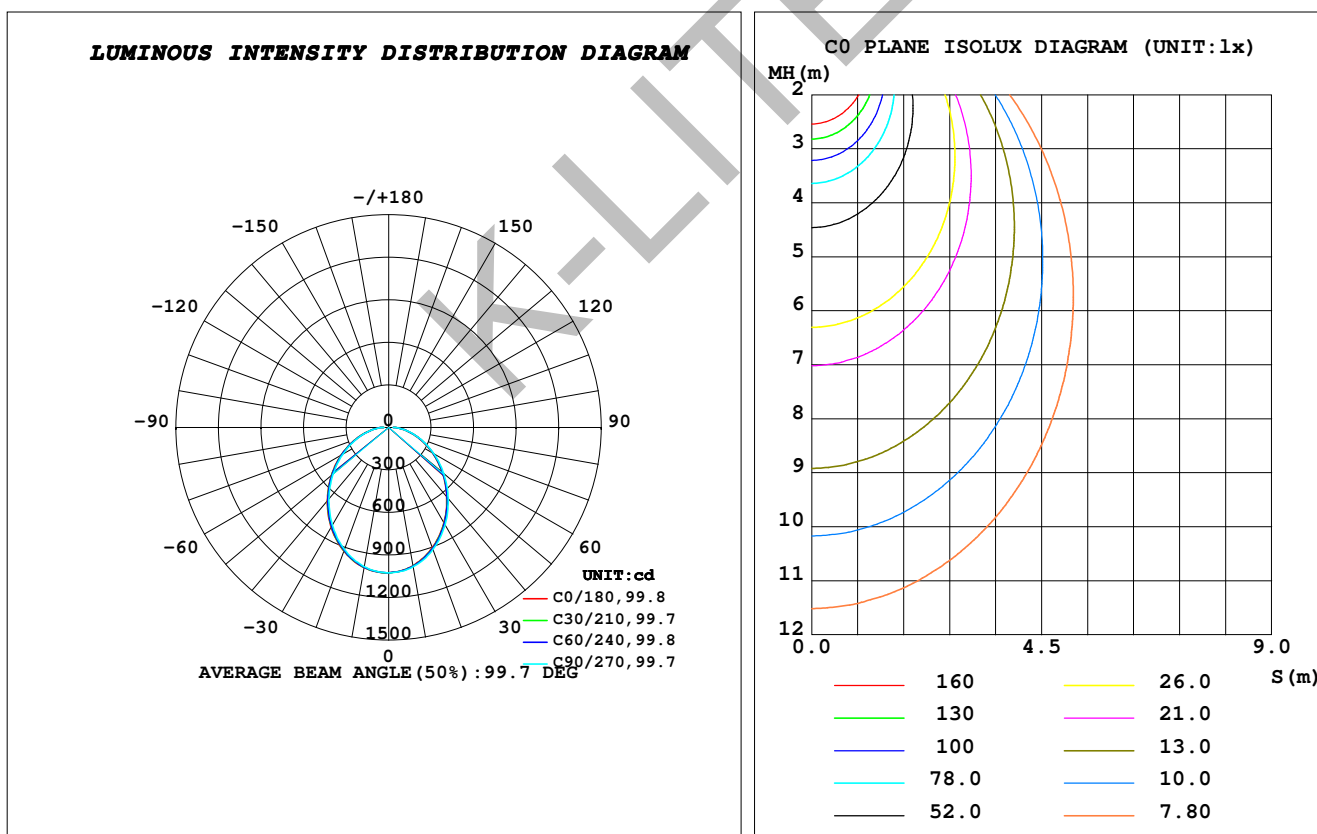

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 29 February 2020

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 65.0%  
 Test Distance: 1.836m [K=1.0000]  
 Remarks: