


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.43V I:0.2848A P:60.088W PF:0.9157 Freq:50.00Hz Lamp Flux:9045.7x1 lm		
NAME: JUNO	TYPE: COLUMN LIGHT	WEIGHT:
SPEC.: CW, NICHIA	DIM.: Ø600 x 2655	SERIAL No.: 3823
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 84.68 lm/W
MODEL	KL-7034	I _{max} (cd)	1935	S/MH (C0/180)	1.13	
NOMINAL POWER (W)	60	LOR (%)	56.3	S/MH (C90/270)	1.14	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	5088.2	η UP, DN (C0-180)	0.3, 27.3	
NOMINAL FLUX (lm)	9045.7	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.4, 28.3	
LAMPS INSIDE	1	η up (%)	0.7	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	230	η down (%)	55.5	CIBSE SHR MAX	1.35	

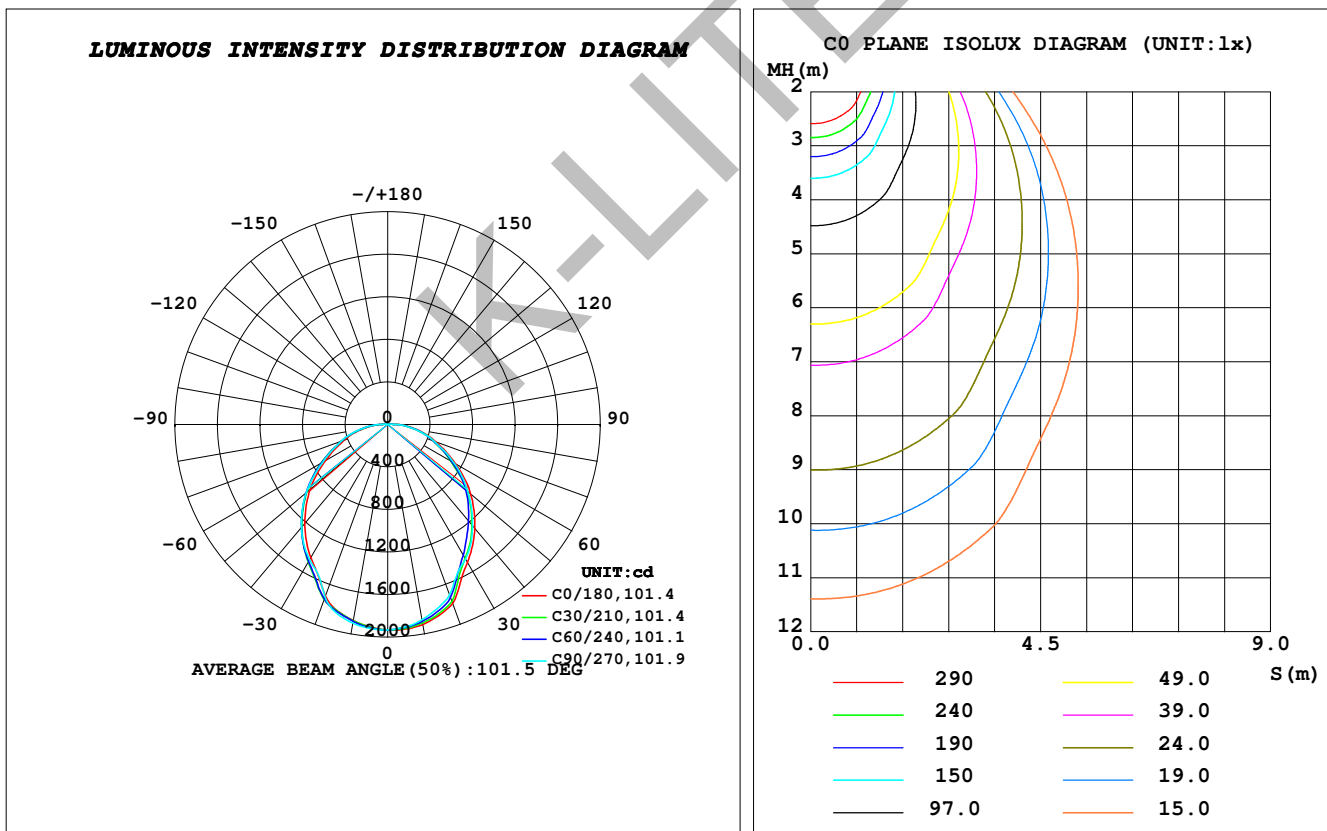

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 23 November 2021

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: