


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.14V I:0.1437A P:23.076W PF:0.9011 Freq:50.00Hz Lamp Flux:2590.9x1 lm		
NAME: DIVA DEEP ROUND	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: CW, EPISTAR	DIM.: Ø170 x 50	SERIAL No.: 1055
MFR.: K-LITE	SUR.:	Shielding Angle: 120°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3323	Imax (cd)	1010	S/MH (C0/180)	1.22
NOMINAL POWER (W)	24	LOR (%)	91.1	S/MH (C90/270)	1.20
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2359.7	η UP, DN (C0-180)	0.0, 46.1
NOMINAL FLUX (lm)	2590.9	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 45.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	91.1	CIBSE SHR MAX	1.35

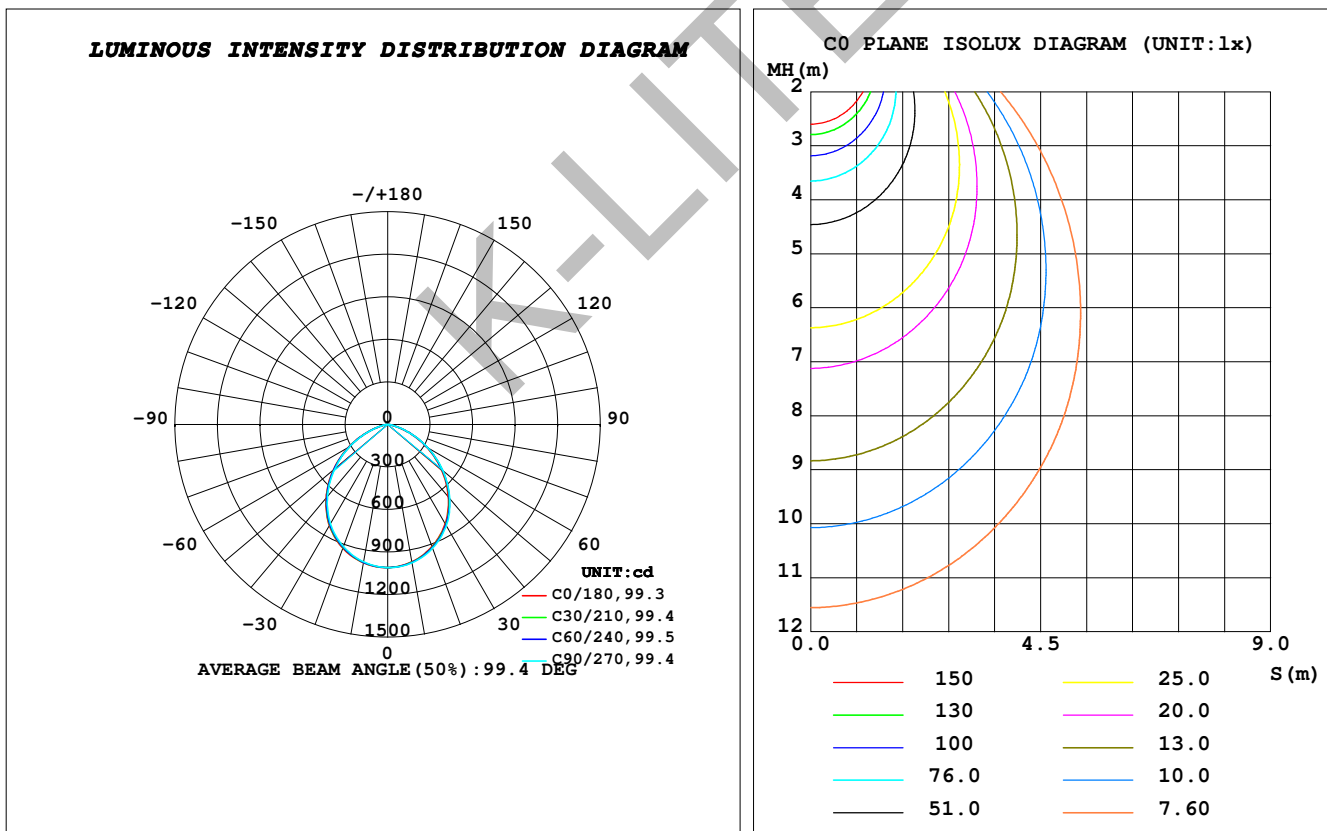

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 03 February 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.836m [K=1.0000]
Remarks: