
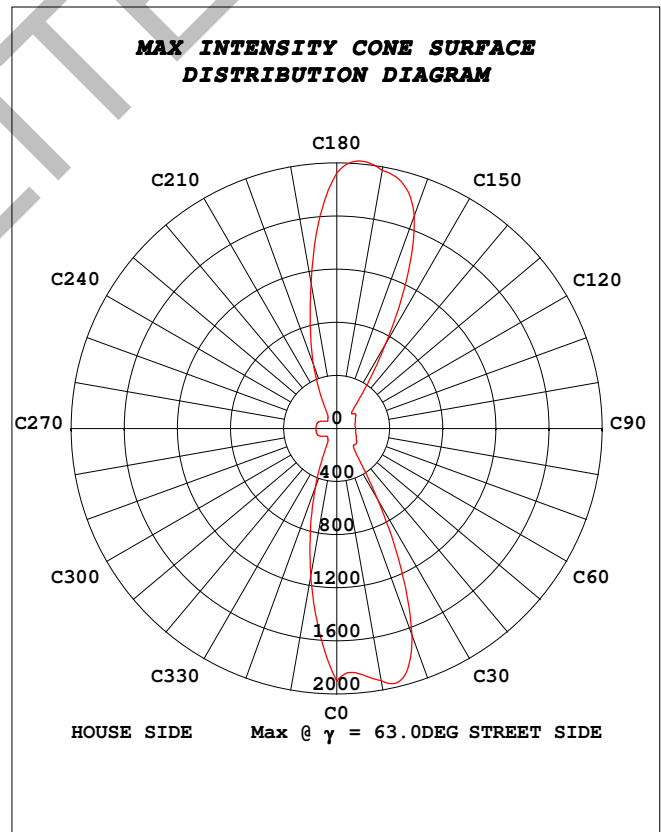


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.46V I:0.1307A P:29.629W PF:0.9836 Freq:49.99Hz Lamp Flux:4635.9x1 lm		
NAME: EZHIL	TYPE:POLE MOUNTED SYSTEMS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 735 x 122 x 985	SERIAL No.:3986
MFR.: K-LITE	SUR.:	Shielding Angle:TYPE II

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 100.45 lm/W
MODEL	KL-4968	I _{max} (cd)	1975	η street_up (%)	0.0	
NOMINAL POWER (W)	30	LOR (%)	64.2	η street_down (%)	43.4	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2976	η house_up (%)	0.0	
NOMINAL FLUX (lm)	4635.9	MAXIMUM @ (C, γ)	170,63.0	η house_down (%)	20.8	
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.00100	
TEST VOLTAGE (V)	230	η down (%)	64.2	SLI	18.387	

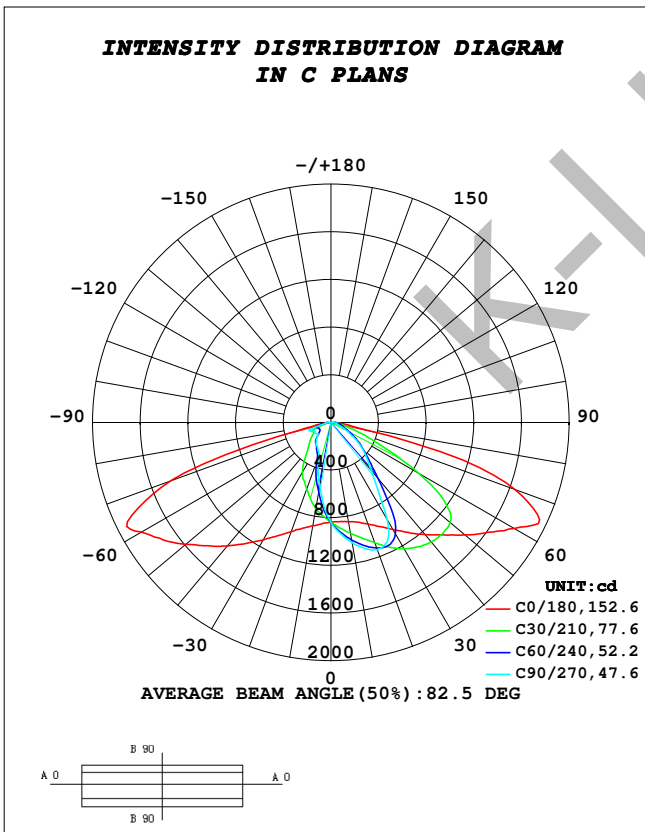

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 15 January 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: