


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.41V I:0.0620A P:13.712W PF:0.9601 Freq:49.99Hz Lamp Flux:1507.5x1 lm		
NAME: PLATINA MINI - TRIM	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: WW, CITIZEN	DIM.: Ø85 x 104	SERIAL No.: 1488
MFR.: K-LITE	SUR.:	Shielding Angle: 24°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3328	Imax (cd)	3857	S/MH (C0/180)	0.40
NOMINAL POWER (W)	12	LOR (%)	47.2	S/MH (C90/270)	0.40
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	712.22	η UP, DN (C0-180)	0.0, 23.0
NOMINAL FLUX (lm)	1507.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 24.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	47.2	CIBSE SHR MAX	1.00

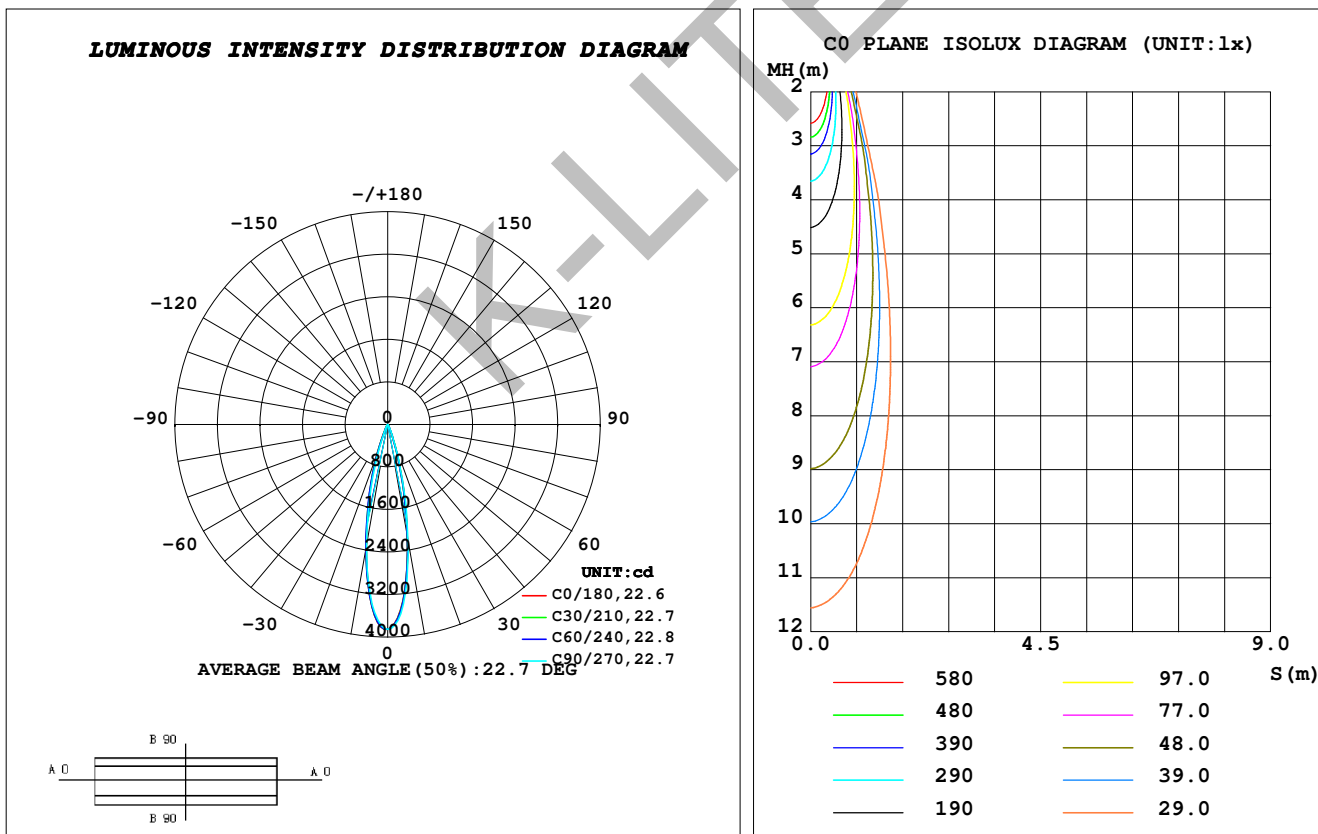

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 15 July 2020**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**