


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.51V I:0.1161A P:24.227W PF:0.9050 Freq:49.98Hz Lamp Flux:2720.5x1 lm		
NAME: DIVA DEEP SQUARE	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: NW, EPISTAR	DIM.: Sq.165 x 50	SERIAL No.:1684
MFR.: K-LITE	SUR.:	Shielding Angle:120°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3326	Imax (cd)	1027	S/MH (C0/180)	1.26
NOMINAL POWER (W)	24	LOR (%)	95.1	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2587.2	η UP, DN (C0-180)	0.0, 48.0
NOMINAL FLUX (lm)	2720.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 47.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	95.1	CIBSE SHR MAX	1.35

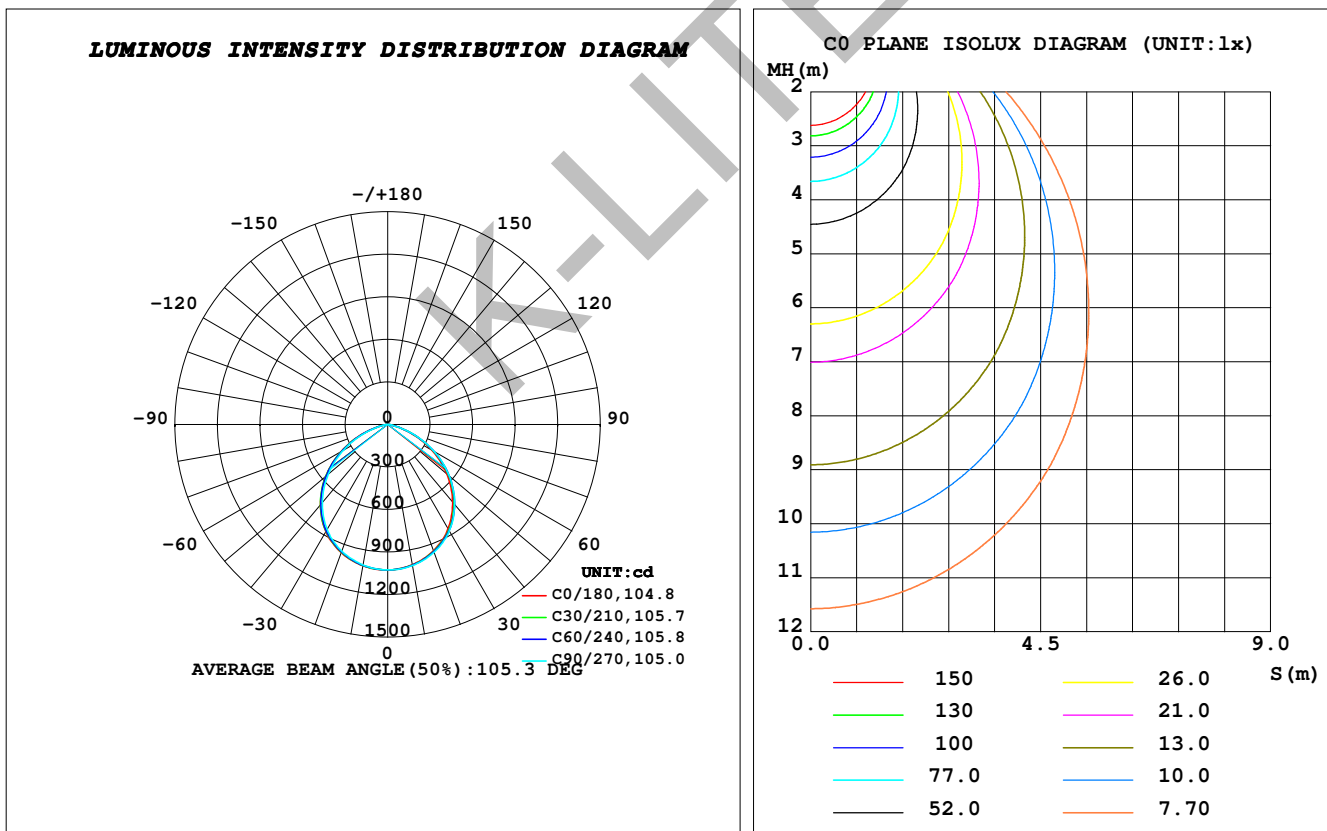

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 19 August 2020

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 65.0%  
 Test Distance: 1.852m [K=1.0000]  
 Remarks: