


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.47V I:0.0256A P:2.8704W PF:0.4857 Freq:49.99Hz Lamp Flux:247.8x1 lm		
NAME: PLATINA SPOT	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: CW, CREE	DIM.: Ø36 x 57	SERIAL No.: 1645
MFR.: K-LITE	SUR.:	Shielding Angle: 15°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3345	Imax (cd)	1318	S/MH (C0/180)	0.36
NOMINAL POWER (W)	3	LOR (%)	77.7	S/MH (C90/270)	0.31
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	192.59	η UP, DN (C0-180)	0.0, 44.8
NOMINAL FLUX (lm)	247.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 32.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	77.7	CIBSE SHR MAX	1.00

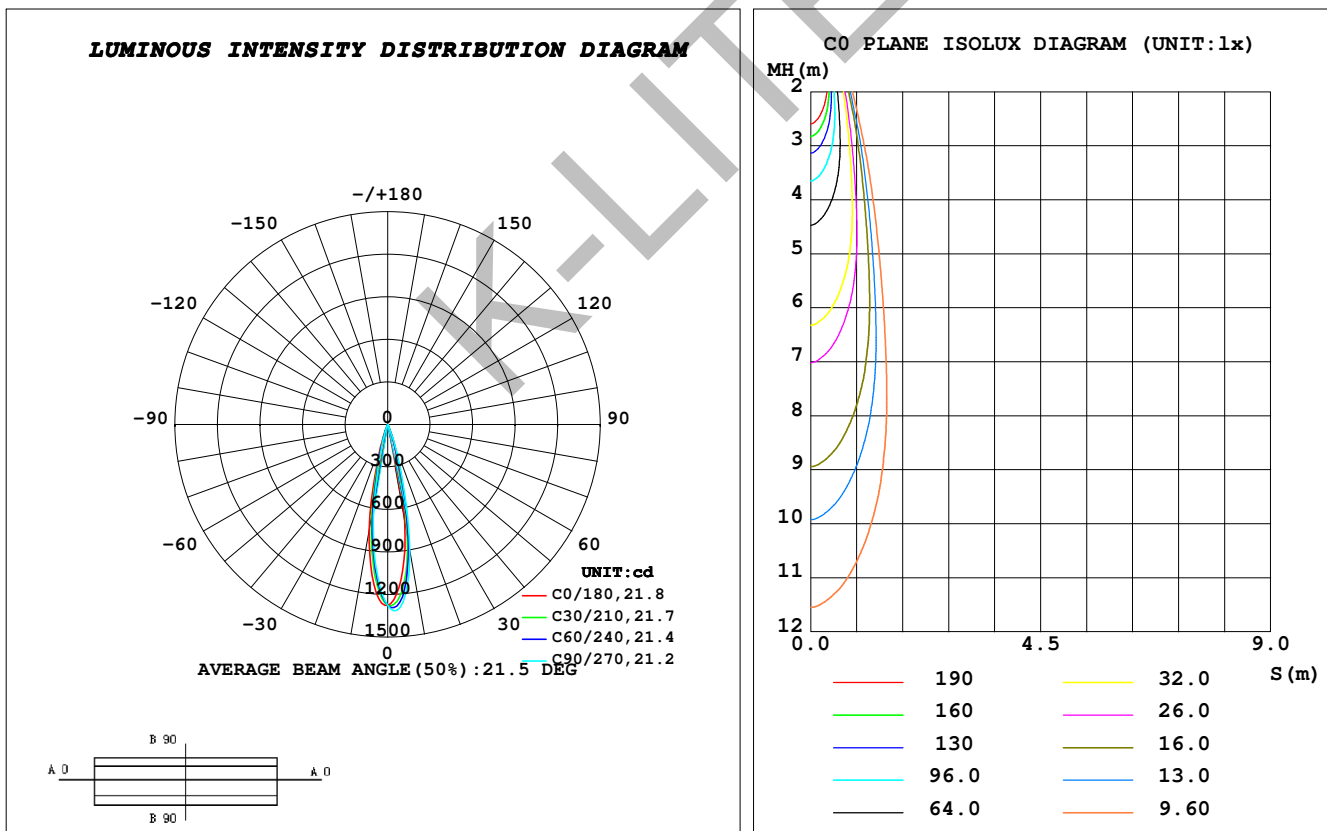

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 08 August 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: