


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.47V I:0.0402A P:7.7526W PF:0.8366 Freq:50.09Hz Lamp Flux:1061x1 lm		
NAME: TRISHA - LED MODULE	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: NW, BRIDGELUX	DIM.: Ø50 x 51	SERIAL No.: 3010
MFR.: K-LITE	SUR.:	Shielding Angle: 15°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.98 lm/W			
MODEL	KL-8177	I _{max} (cd)	3175	S/MH (C0/180)	0.33
NOMINAL POWER (W)	7	LOR (%)	89.9	S/MH (C90/270)	0.32
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	953.40	η UP, DN (C0-180)	0.0, 44.3
NOMINAL FLUX (lm)	1061	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 45.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	89.9	CIBSE SHR MAX	1.00

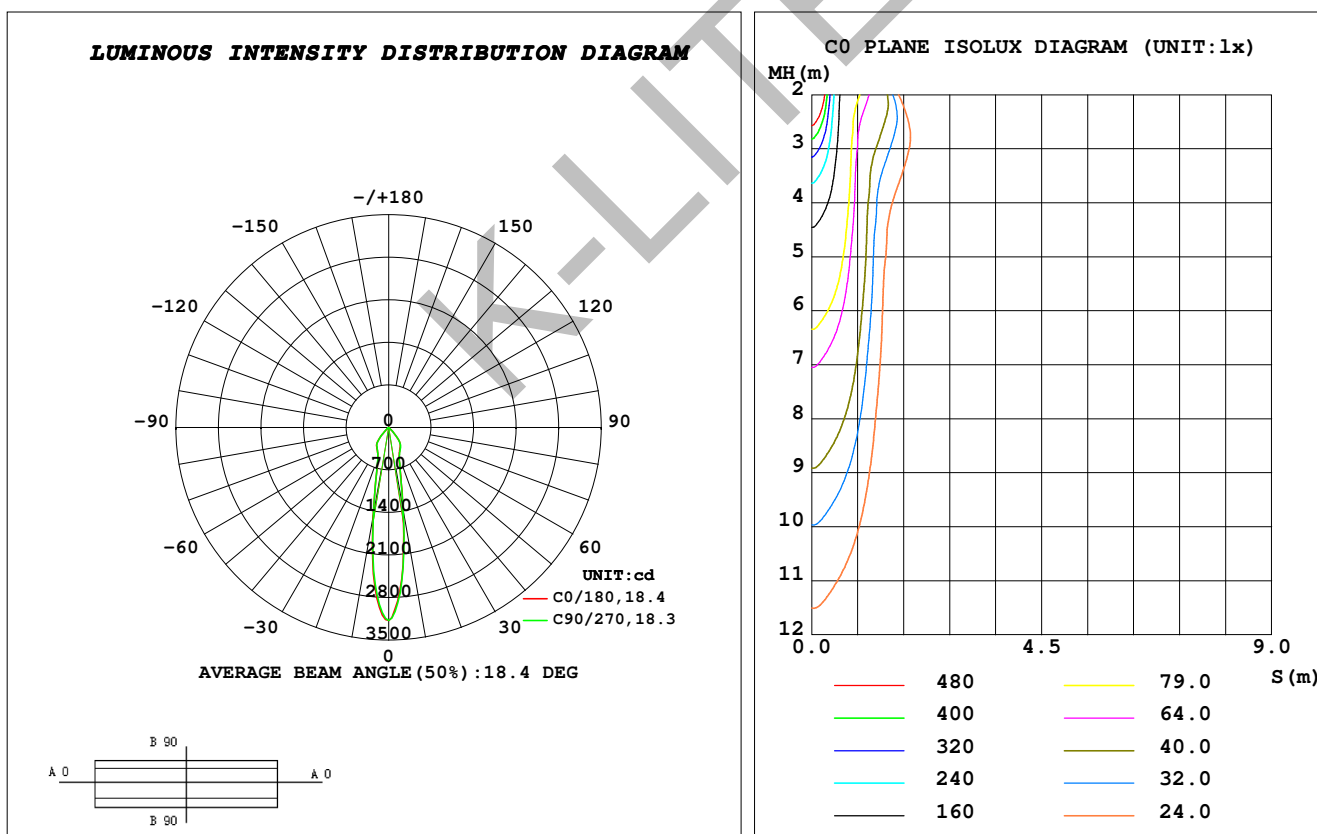

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 30 April 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: