


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.63V I:0.0544A P:5.8103W PF:0.4627 Freq:50.00Hz Lamp Flux:520x1 lm		
NAME: SLEEK PLATINA MICRO	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: WW, CREE	DIM.: Ø33 x 91	SERIAL No.: 4481
MFR.: K-LITE	SUR.:	Shielding Angle: 15°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3338	Imax (cd)	2287	S/MH (C0/180)	0.23
NOMINAL POWER (W)	6	LOR (%)	35.5	S/MH (C90/270)	0.27
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	184.52	η UP, DN (C0-180)	0.0, 16.7
NOMINAL FLUX (lm)	520	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 18.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	35.5	CIBSE SHR MAX	1.00

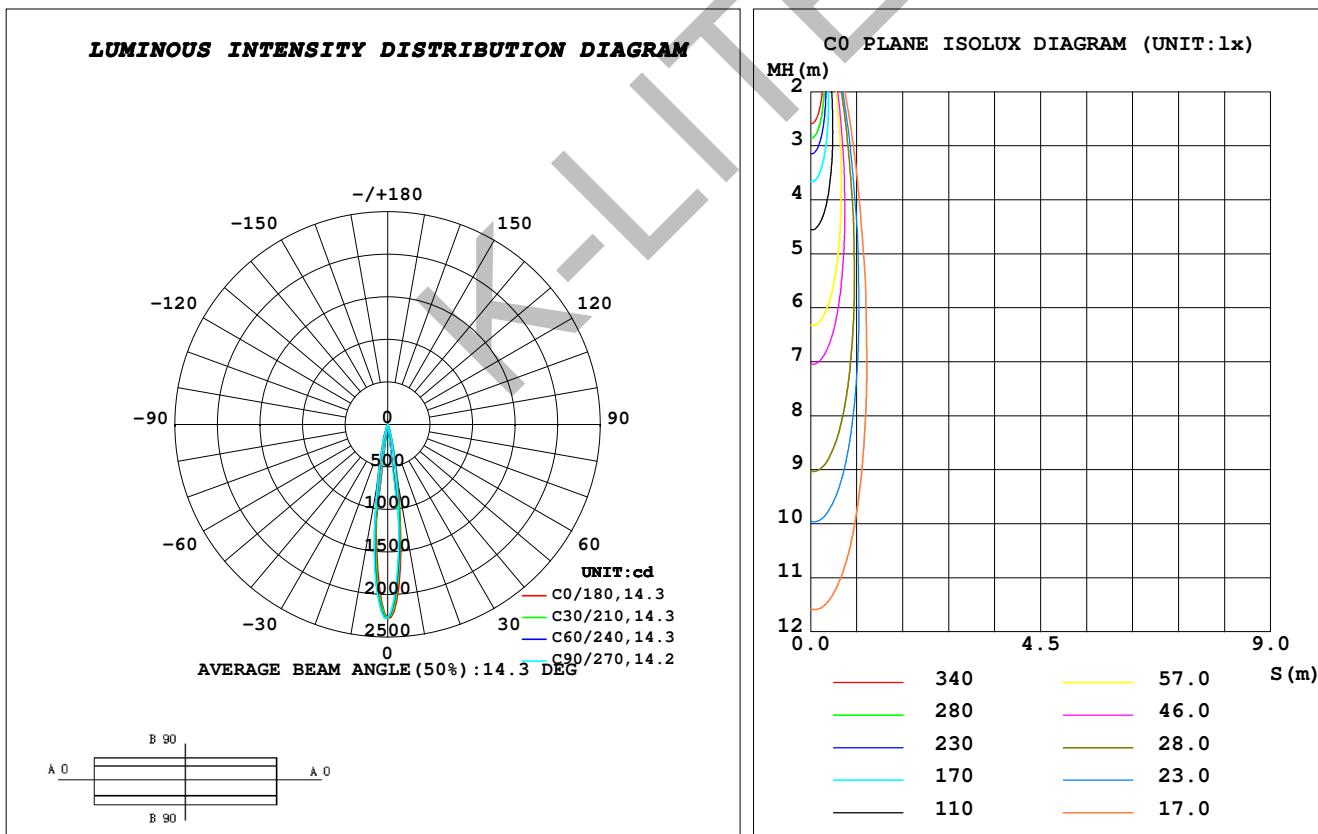

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 28 April 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**