


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.21V I:0.0577A P:5.7006W PF:0.4289 Freq:49.99Hz Lamp Flux:546x1 lm		
NAME: SLEEK PLATINA MICRO	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: WW, CREE	DIM.: Ø33 x 91	SERIAL No.: 0520
MFR.: K-LITE	SUR.:	Shielding Angle: 36°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3338	Imax (cd)	801.6	S/MH (C0/180)	0.52
NOMINAL POWER (W)	6	LOR (%)	50.4	S/MH (C90/270)	0.44
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	275.29	η UP, DN (C0-180)	0.0, 30.3
NOMINAL FLUX (lm)	546	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 20.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	50.4	CIBSE SHR MAX	0.55

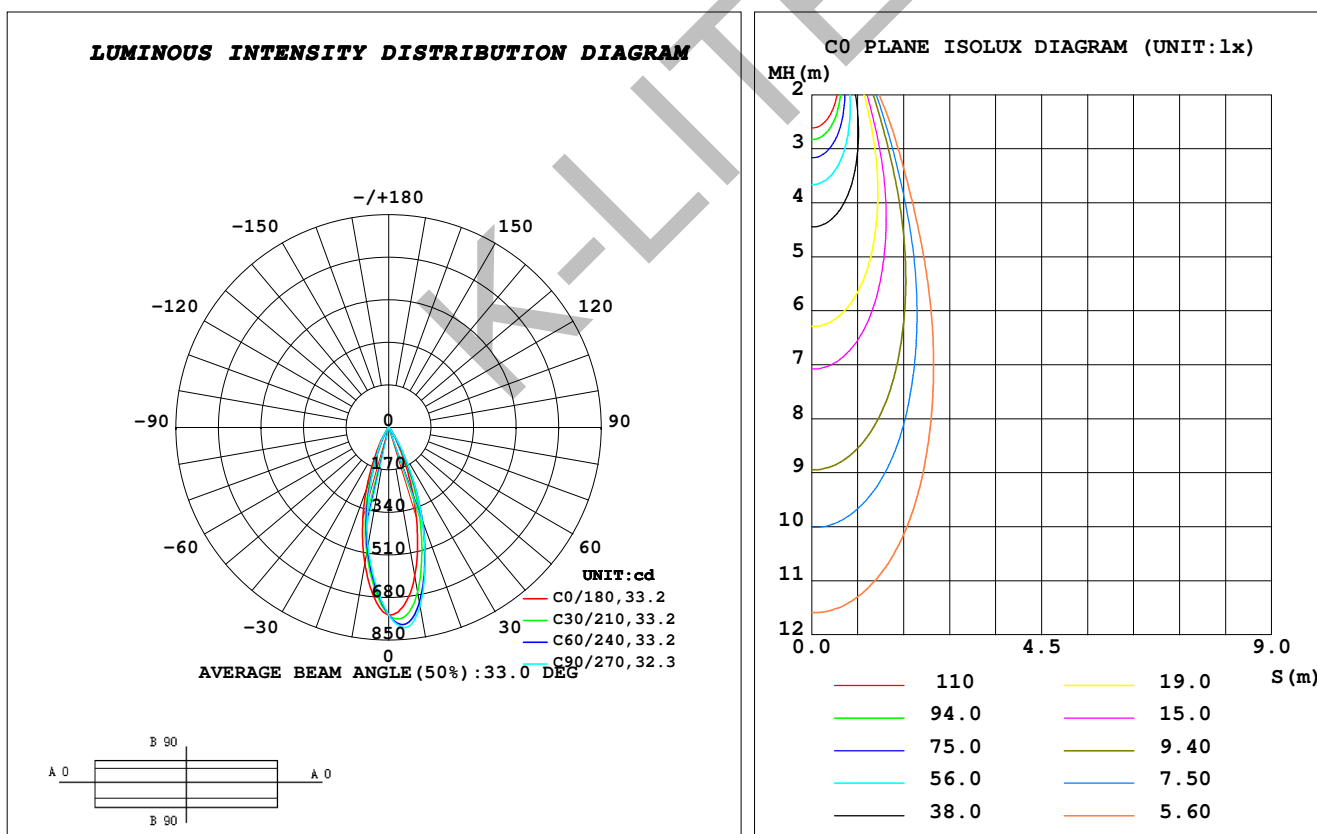

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 10 December 2019**

**γ Range: 0 - 90DEG**  
**γ Interval: 0.5DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**