


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.68V I:0.0272A P:6.1444W PF:0.9775 Freq:49.98Hz Lamp Flux:871.02x1 lm		
NAME: SUDO MINI - ASY FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 130 x 87 x 76	SERIAL No.:4860
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2747	Imax (cd)	292.0	S/MH (C0/180)	1.32
NOMINAL POWER (W)	6	LOR (%)	39.3	S/MH (C90/270)	1.12
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	342.58	η UP, DN (C0-180)	0.0, 32.6
NOMINAL FLUX (lm)	871.02	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 6.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	39.3	CIBSE SHR MAX	1.00

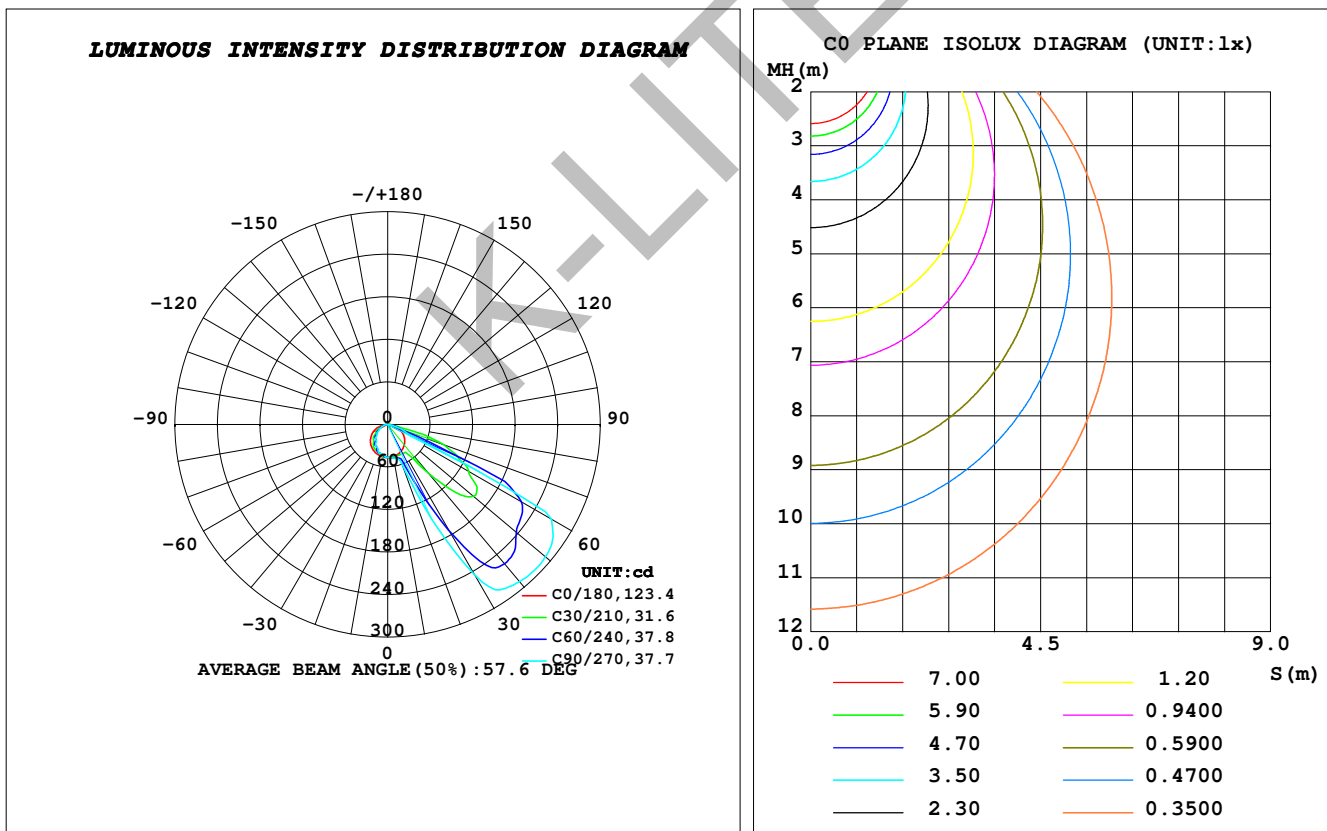

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 01 September 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: