
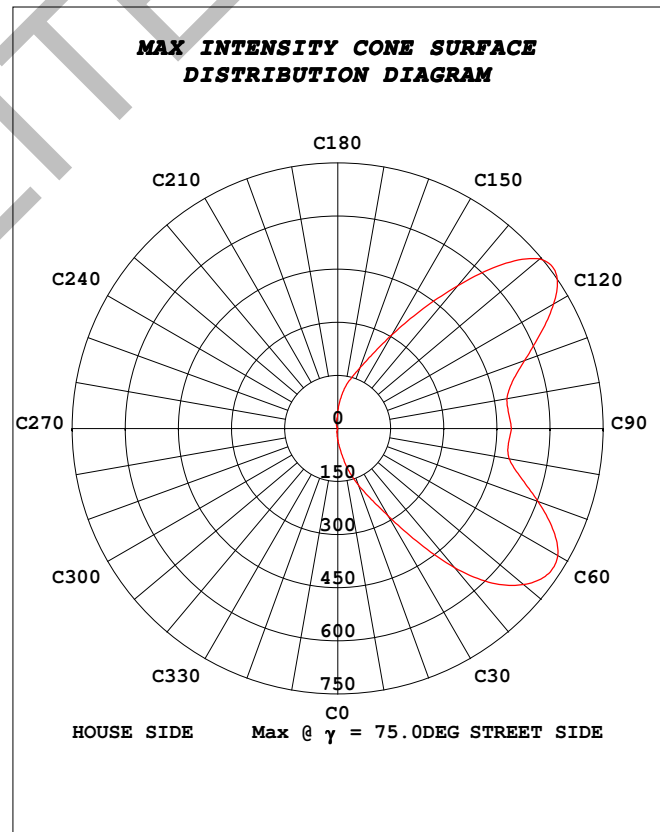


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.66V I:0.0539A P:11.990W PF:0.9641 Freq:49.99Hz Lamp Flux:1579x1 lm		
NAME: AJNA SLICE BOLLARD	TYPE:BOLLARDS	WEIGHT:
SPEC.:WW, LUMILED	DIM.: Ø166 x 405	SERIAL No.:5122
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4732	Imax (cd)	745.3	η street_up (%)	11.2
NOMINAL POWER (W)	12	LOR (%)	61.3	η street_down (%)	48.6
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	968.5	η house_up (%)	0.6
NOMINAL FLUX (lm)	1579	MAXIMUM @ (C, γ)	130,75.0	η house_down (%)	0.9
LAMPS INSIDE	1	η up (%)	11.8	76 FLASHAREA (m2)	0.00100
TEST VOLTAGE (V)	230	η down (%)	49.5	SLI	14.958

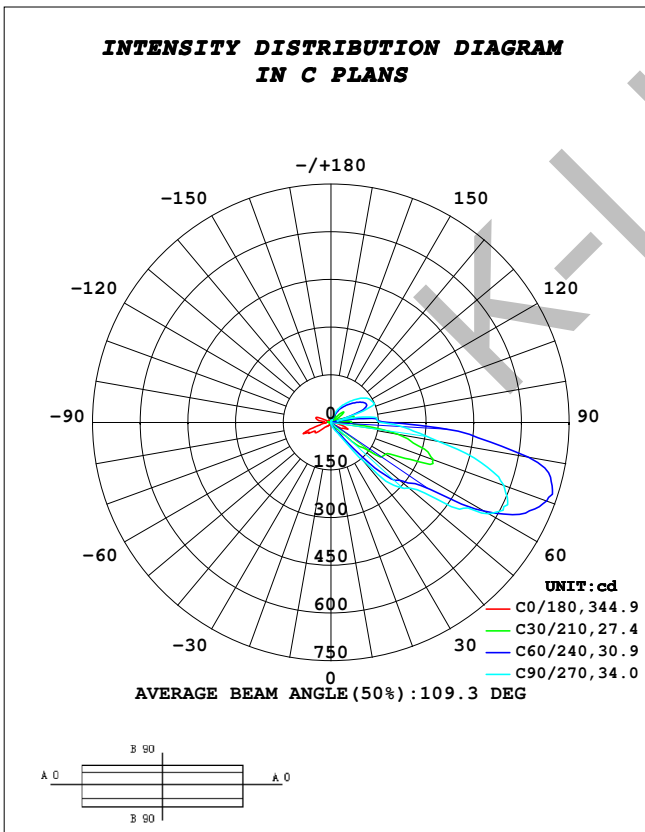

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 18 November 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: