


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.63V I:0.0109A P:2.3236W PF:0.9286 Freq:50.00Hz Lamp Flux:253x1 lm		
NAME: PARULA	TYPE:PATH FINDERS	WEIGHT:
SPEC.:NW, LUMILED	DIM.: Sq.115 x 52	SERIAL No.:5011
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 91.65 lm/W
MODEL	KL-4343	I _{max} (cd)	573.3	S/MH (C0/180)	0.61	
NOMINAL POWER (W)	3	LOR (%)	84.2	S/MH (C90/270)	0.25	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	212.97	η UP, DN (C0-180)	0.0, 71.4	
NOMINAL FLUX (lm)	253	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 12.8	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	230	η down (%)	84.2	CIBSE SHR MAX	0.50	

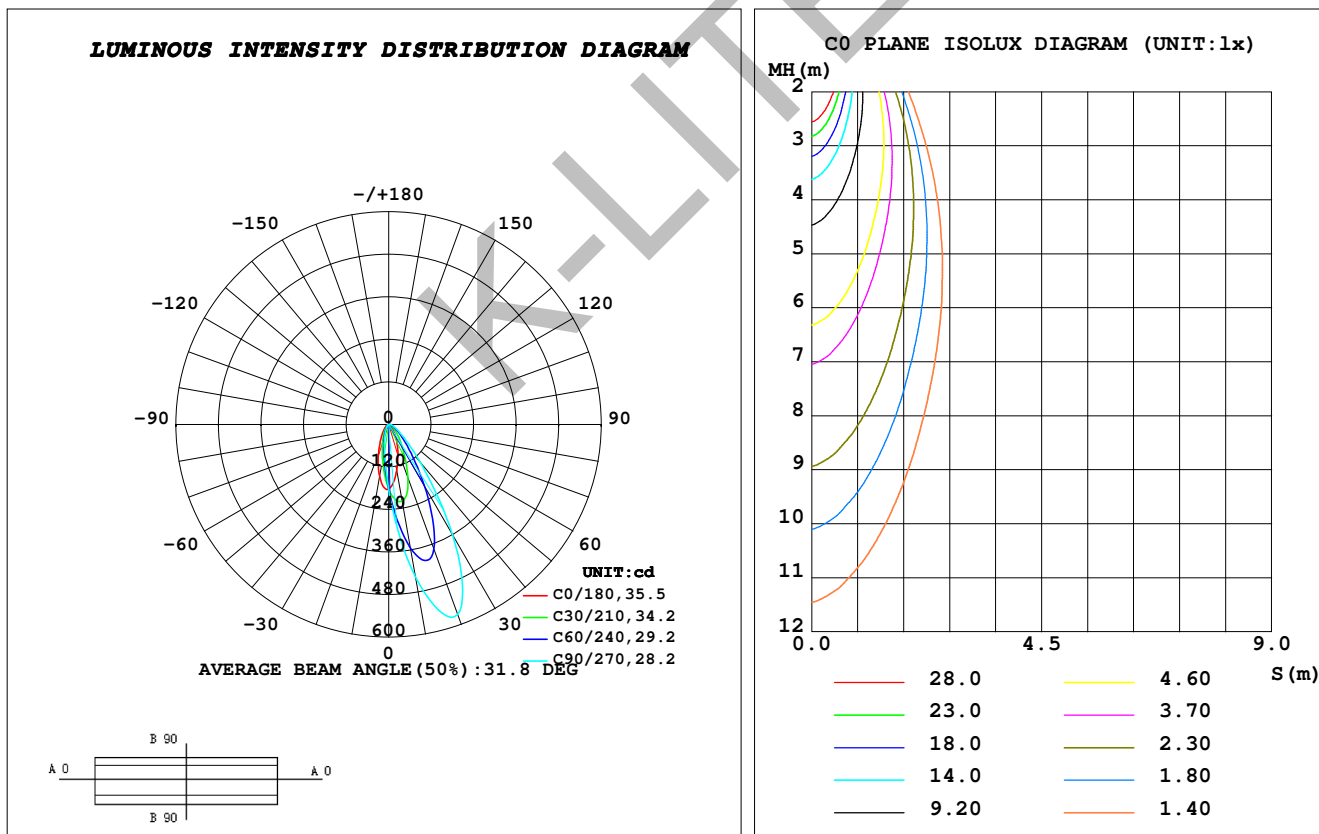

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 28 September 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: