


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.22V I:0.2653A P:25.720W PF:0.4211 Freq:49.99Hz Lamp Flux:3552x1 lm		
NAME: LINEAR WALL WASHER	TYPE:LINEAR LIGHTING	WEIGHT:
SPEC.:WW, CREE, BA-15° x 60°	DIM.: 1000 x 35 x 78	SERIAL No.:1135
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3094	I <sub>max</sub> (cd)	4528	S/MH (C0/180)	0.76
NOMINAL POWER (W)	24	LOR (%)	52.2	S/MH (C90/270)	0.33
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1855.5	η UP, DN (C0-180)	0.0, 28.8
NOMINAL FLUX (lm)	3552	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 23.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	52.2	CIBSE SHR MAX	1.00

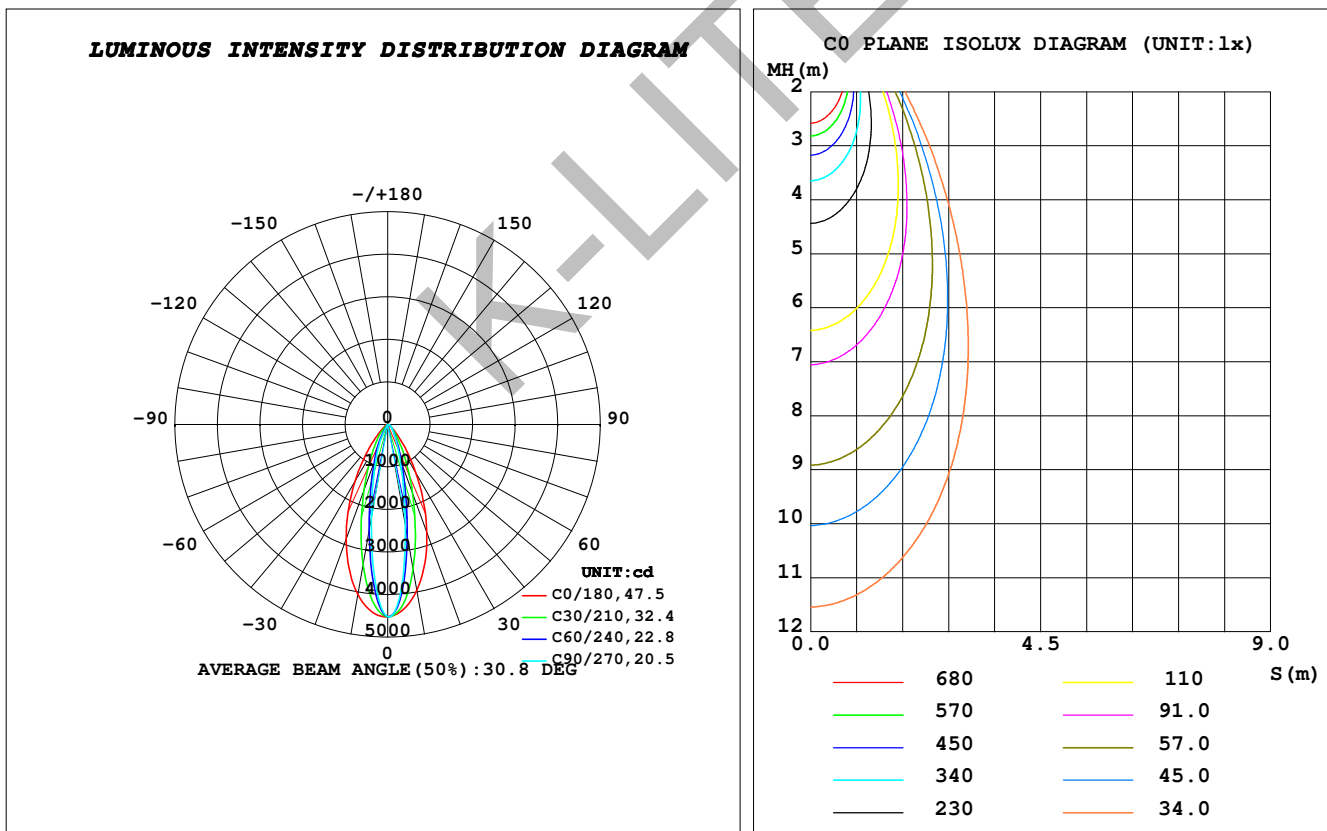

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 26 February 2020

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 65.0%  
 Test Distance: 1.825m [K=1.0000]  
 Remarks: