


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.25V I:0.0275A P:2.8884W PF:0.4559 Freq:49.98Hz Lamp Flux:274.44x1 lm		
NAME: LINE N DOT - LINEAR DOWN LIGHT	TYPE:RECESSED CEILING	WEIGHT:0.080Kg
SPEC.:4000K, NICHIA, BA-48°, 80 CRI	DIM.: 45.5 x 45.5 x 50	SERIAL No.:INT/2023/07/48D
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3369	Imax (cd)	476.0	S/MH (C0/180)	0.66
NOMINAL POWER (W)	3	LOR (%)	78.9	S/MH (C90/270)	0.64
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	216.45	η UP, DN (C0-180)	0.0, 40.6
NOMINAL FLUX (lm)	274.44	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 38.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	78.9	CIBSE SHR MAX	0.70

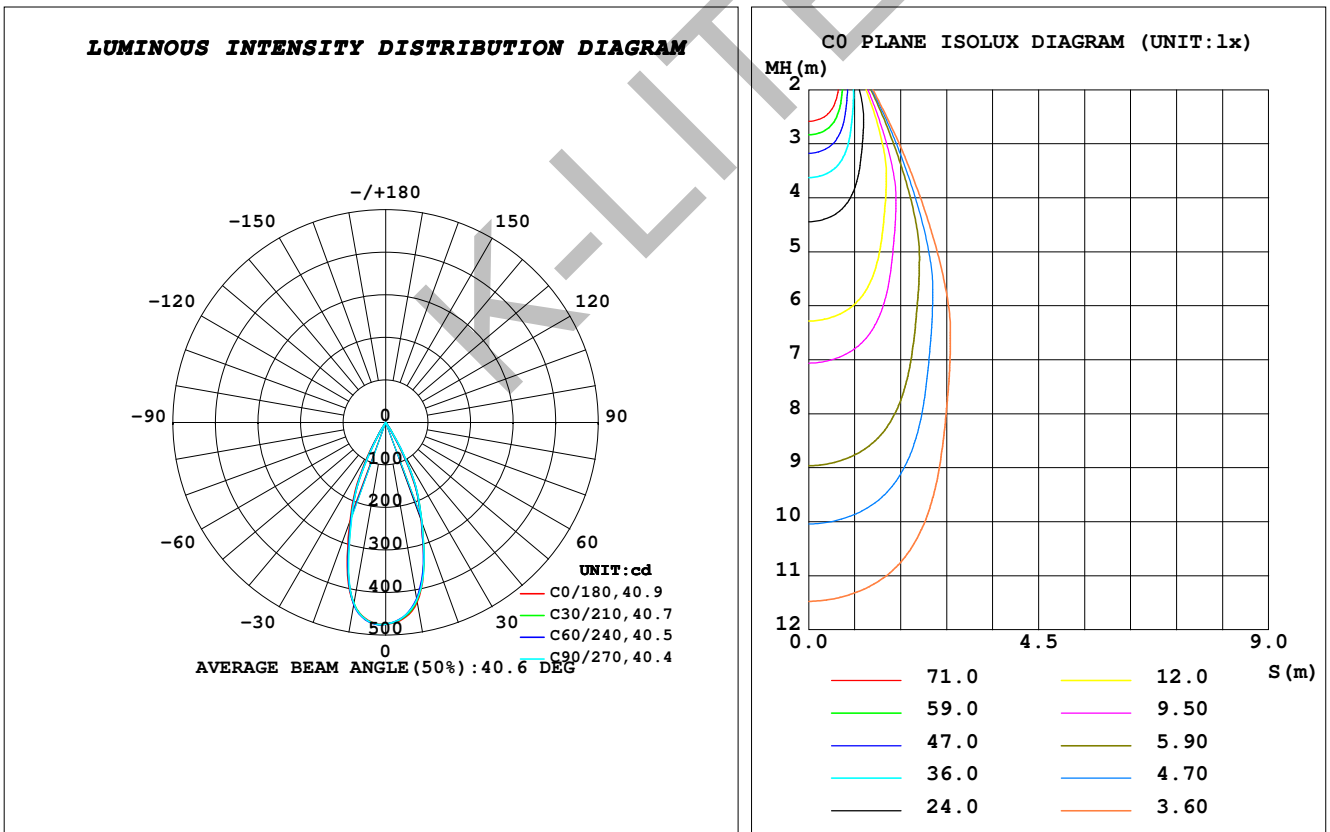

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 25 July 2023

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 45.4%  
 Test Distance: 1.944m [K=1.0000]  
 Remarks: