


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.18V I:0.0473A P:9.6251W PF:0.8840 Freq:49.81Hz Lamp Flux:1261.87x1 lm		
NAME: LINE N DOT - LINEAR DOWN LIGHT	TYPE:RECESSED CEILING	WEIGHT:0.230Kg
SPEC.:4000K, NICHIA, BA-12°, 80 CRI	DIM.: 76 x 76 x 50	SERIAL No.:INT/2023/07/46A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.49 lm/W			
MODEL	KL-3370	I _{max} (cd)	7464	S/MH (C0/180)	0.28
NOMINAL POWER (W)	10	LOR (%)	80.5	S/MH (C90/270)	0.26
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1015.4	η UP, DN (C0-180)	0.0, 40.1
NOMINAL FLUX (lm)	1261.87	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 40.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	80.5	CIBSE SHR MAX	1.00

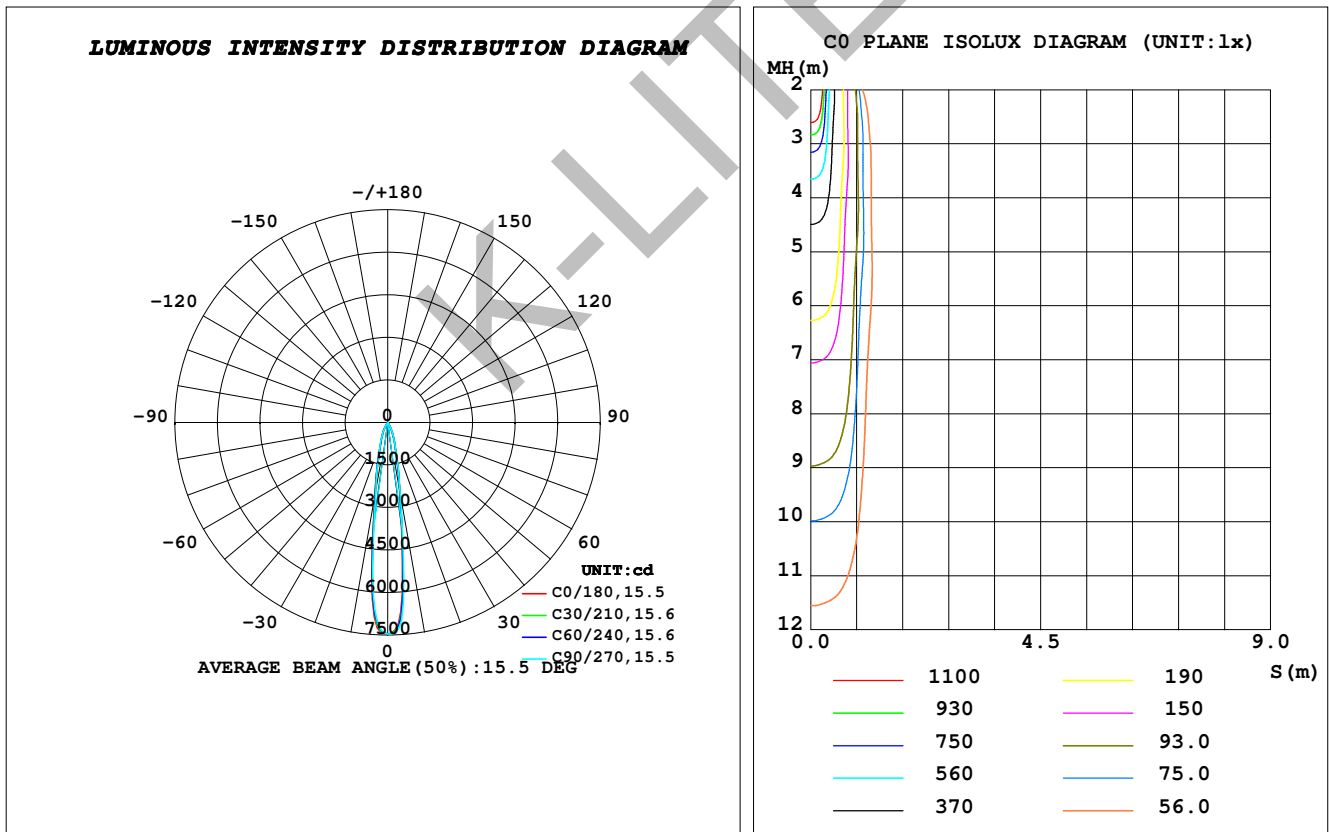

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.5DEG
 Operators: K-LITE
 Test Date: 21 July 2023

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 45.4%
 Test Distance: 1.944m [K=1.0000]
 Remarks: