
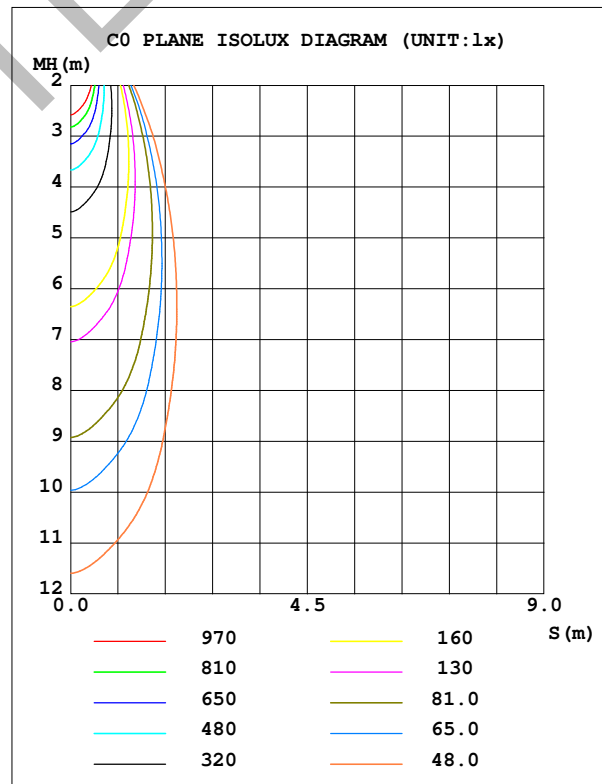


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.43V I:0.0799A P:16.189W PF:0.8794 Freq:50.00Hz Lamp Flux:2173.5x1 lm		
NAME: EVO DOT - PENDANT - DIRECT	TYPE:LINEAR LIGHTING	WEIGHT:0.780Kg
SPEC.:2700K, NICHIA, BA-20°, 80 CRI	DIM.: 600 x 36 x 75	SERIAL No.:INT/2023/07/80B
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 108.87 lm/W
MODEL	KL-3470	I _{max} (cd)	6482	S/MH (C0/180)		0.48
NOMINAL POWER (W)	20	LOR (%)	81.1	S/MH (C90/270)		0.40
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1762.4	η UP, DN (C0-180)		0.0, 43.0
NOMINAL FLUX (lm)	2173.5	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 38.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.00
TEST VOLTAGE (V)	230	η down (%)	81.1	CIBSE SHR MAX		1.00

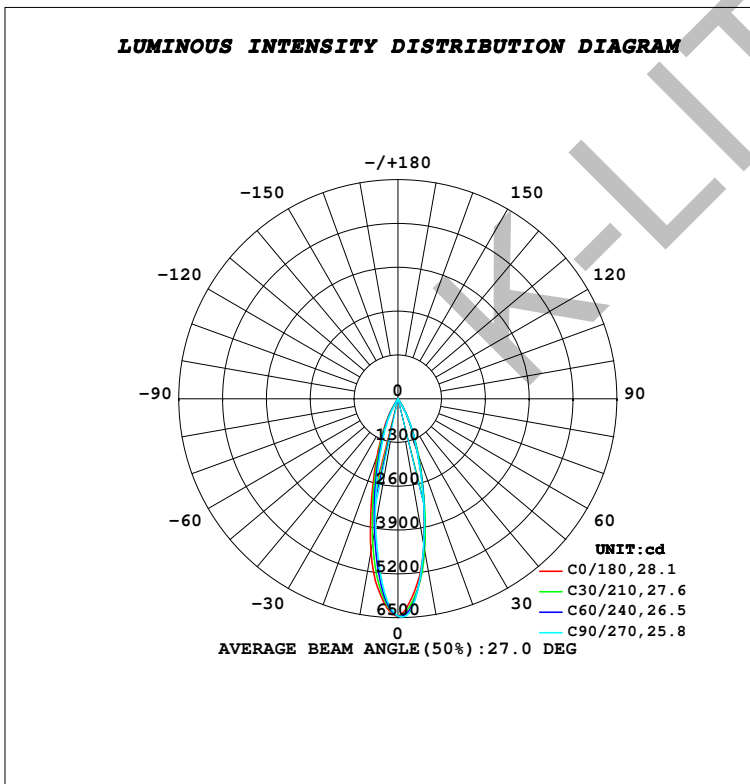

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.5DEG
 Operators: K-LITE
 Test Date: 29 July 2023

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 45.6%
 Test Distance: 1.944m [K=1.0000]
 Remarks: