
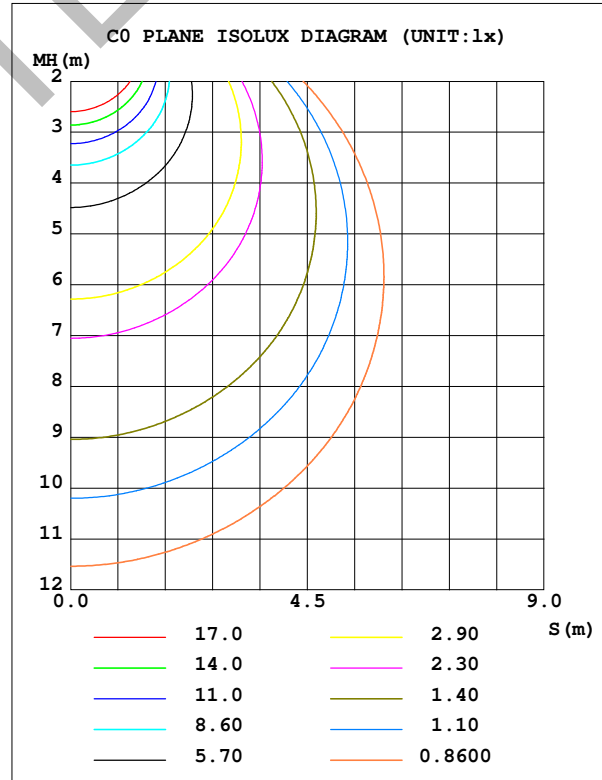


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.62V I:0.0767A P:12.949W PF:0.7321 Freq:50.00Hz Lamp Flux:345.275x1 lm		
NAME: FORM-16	TYPE:LINEAR LIGHTING	WEIGHT:
SPEC.:WW, BA-120°, 80 CRI	DIM.: 1000 x 16 x 34	SERIAL No.:5085
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 26.67 lm/W
MODEL	KL-3251	I _{max} (cd)	114.3	S/MH (C0/180)		1.32
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)		1.27
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	345.27	η UP, DN (C0-180)		0.0, 50.3
NOMINAL FLUX (lm)	345.275	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 49.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		1.50
TEST VOLTAGE (V)	230	η down (%)	100.0	CIBSE SHR MAX		1.50

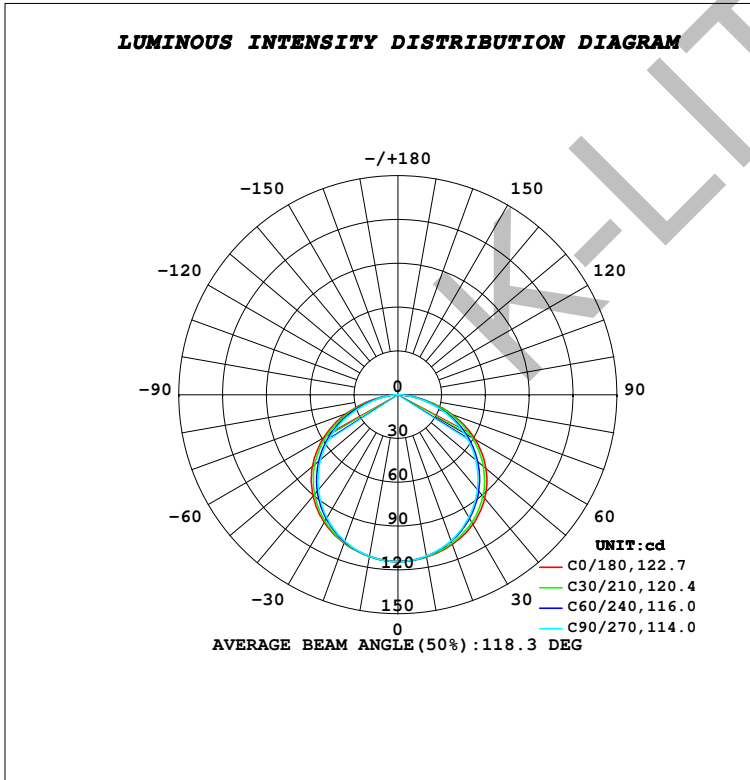

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 12 November 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.935m [K=1.0000]
Remarks: TRANSLUCENT PU ENCAPSULATION