


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.41V I:0.1886A P:39.931W PF:0.9188 Freq:49.99Hz Lamp Flux:3194.48x1 lm		
NAME: LEVO-S	TYPE:LINEAR LIGHTING	WEIGHT:
SPEC.:CW, LUMILED'S 2835	DIM.: 1220 x 50 x 35	SERIAL No.:1834
MFR.: K-LITE	SUR.:(PC OPAL MATTE)	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3408	Imax (cd)	1095	S/MH (C0/180)	1.34
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.20
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3194.5	η UP, DN (C0-180)	0.0, 49.8
NOMINAL FLUX (lm)	3194.48	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	100.0	CIBSE SHR MAX	1.35

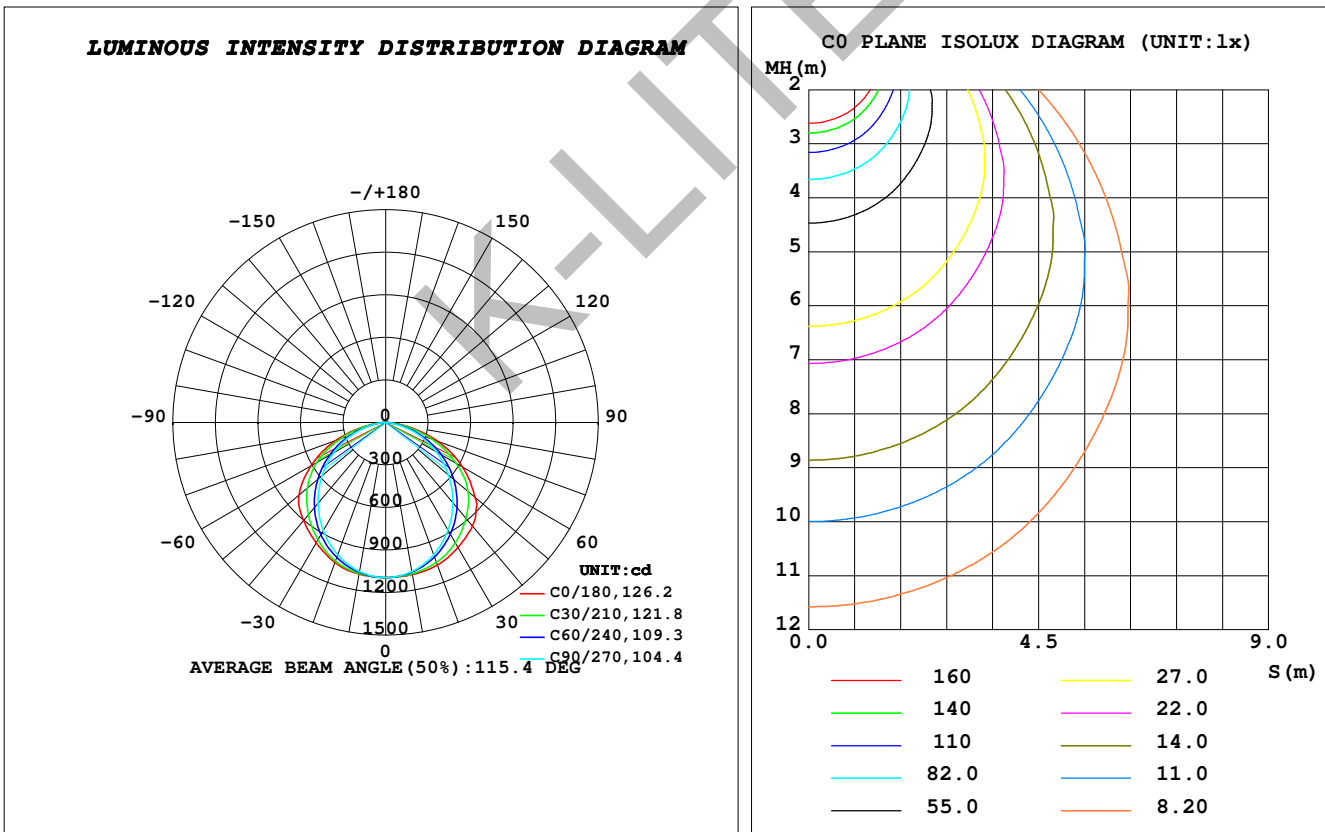

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 09 September 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.836m [K=1.0000]
Remarks: