


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.22V I:0.0931A P:8.0584W PF:0.3761 Freq:49.99Hz Lamp Flux:600x1 lm		
NAME: ZOOM MICRO	TYPE:FLOOD LIGHTS	WEIGHT:0.570Kg
SPEC.:3000K, NARROW BEAM	DIM.: 115 x Ø60 x 160	SERIAL No.:INT/2024/03/31
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2587	Imax (cd)	2572	S/MH (C0/180)	0.26
NOMINAL POWER (W)	6	LOR (%)	43.7	S/MH (C90/270)	0.24
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	262.21	η UP, DN (C0-180)	0.0, 23.2
NOMINAL FLUX (lm)	600	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 20.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	43.7	CIBSE SHR MAX	1.00

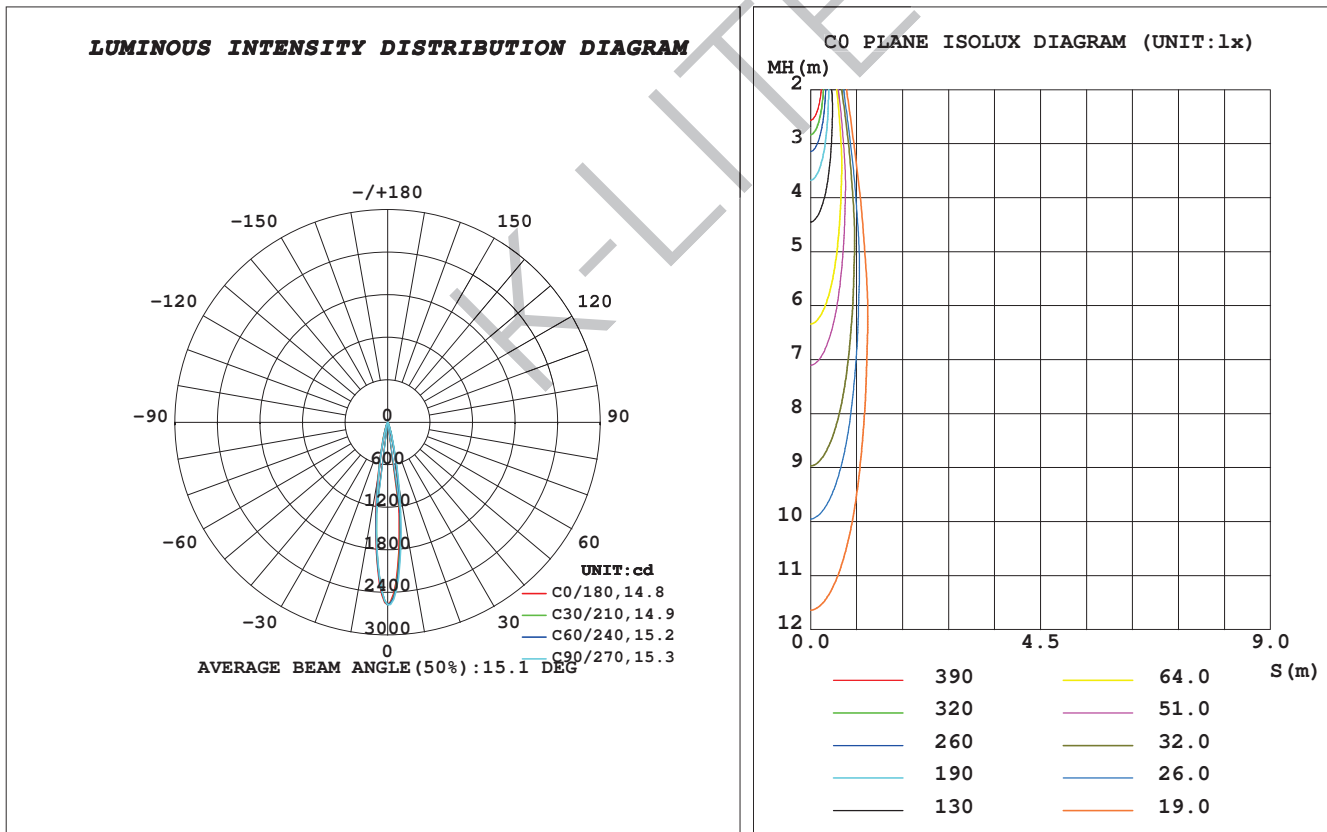

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: K-LITE
 Test Date: 27 March 2024

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 43.3%
 Test Distance: 1.997m [K=1.0000]
 Remarks: