
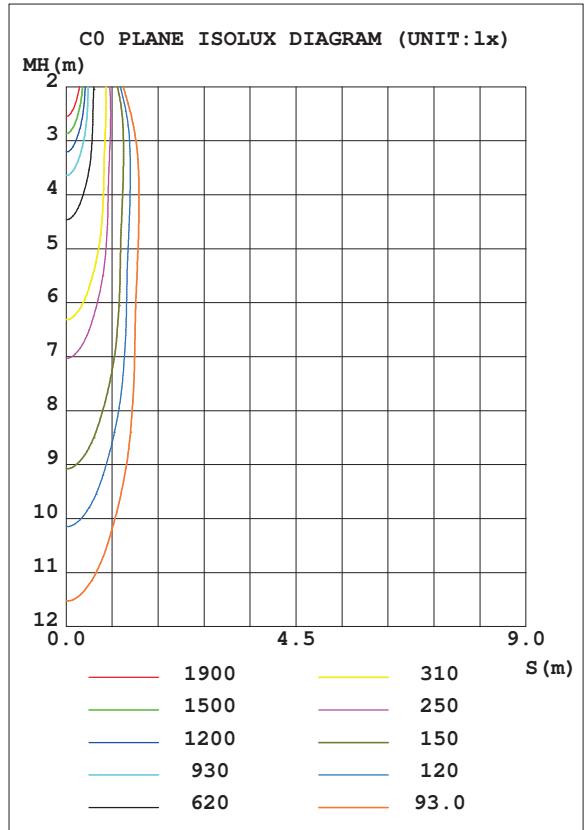


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.27V I:0.0893A P:19.919W PF:0.9690 Freq:49.99Hz Lamp Flux:2332.2x1 lm		
NAME: LINE N DOT - LINEAR DOWN LIGHT	TYPE:RECESSED CEILING	WEIGHT:0.540Kg
SPEC.:2700K, NICHIA, BA-12°, 80CRI	DIM.: 316 x 45.5 x 50	SERIAL No.:INT/2023/06/13A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 100.05 lm/W
MODEL	KL-3373	Imax (cd)	12337	S/MH(C0/180)	0.30	
NOMINAL POWER (W)	24	LOR (%)	85.4	S/MH(C90/270)	0.27	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1992.8	η UP, DN (C0-180)	0.0, 41.5	
NOMINAL FLUX (lm)	2332.2	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 43.9	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	85.4	CIBSE SHR MAX	1.00	

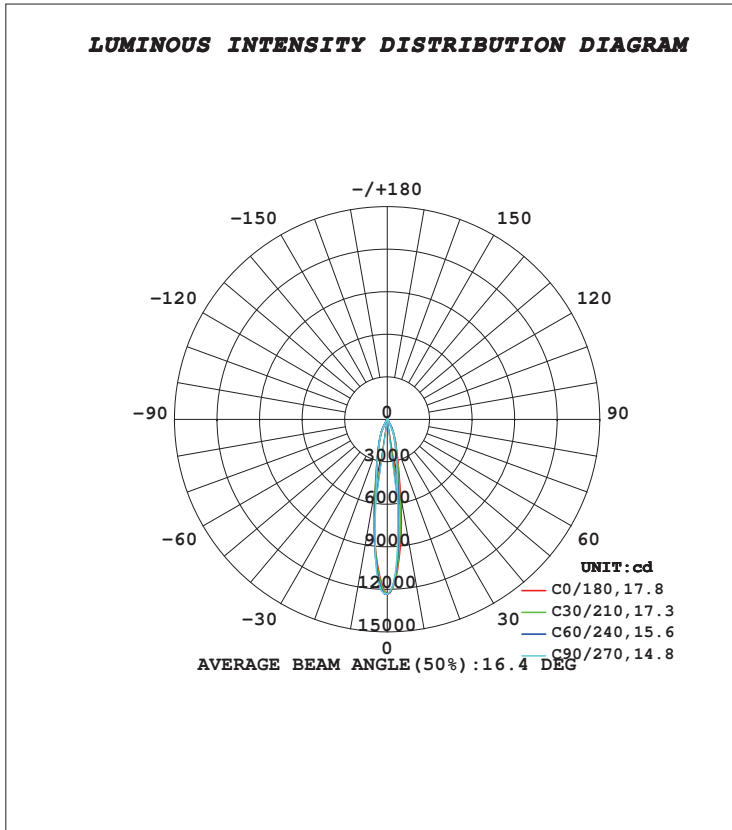

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.6DEG
 Operators: K-LITE
 Test Date: 08 June 2023

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 45.5%
 Test Distance: 1.944m [K=1.0000]
 Remarks: