


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.46V I:0.0287A P:6.4173W PF:0.9696 Freq:49.99Hz Lamp Flux:796x1 lm		
NAME: SUDO - ASY FRAME	TYPE:PATH FINDERS	WEIGHT:1.0Kg
SPEC.:NW, NICHIA	DIM.: 255 x 87 x 76	SERIAL No.:1621
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2757	Imax (cd)	210.1	S/MH (C0/180)	1.51
NOMINAL POWER (W)	6	LOR (%)	26.6	S/MH (C90/270)	0.11
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	211.63	η UP, DN (C0-180)	0.0, 25.5
NOMINAL FLUX (lm)	796	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 1.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	26.6	CIBSE SHR MAX	1.00

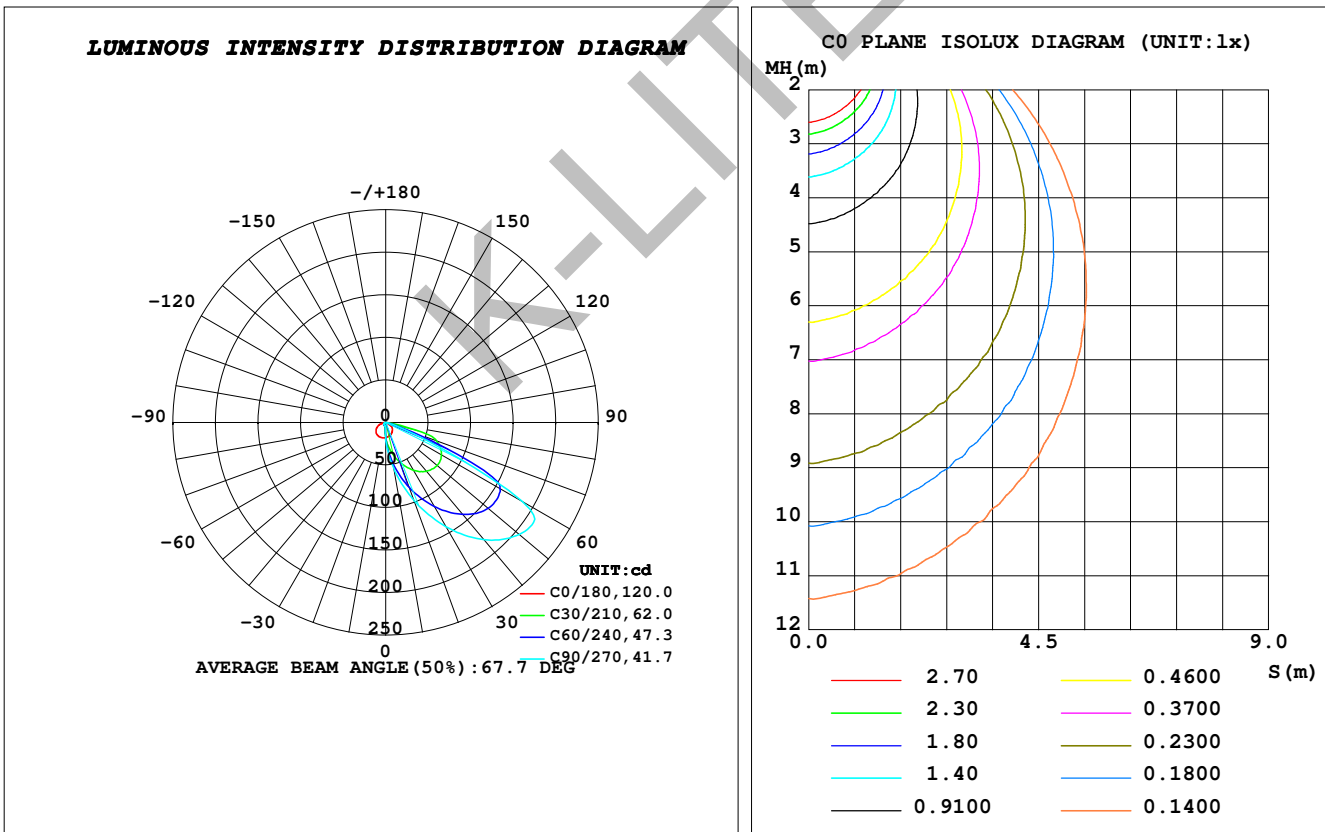

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 04 August 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.836m [K=1.0000]
Remarks: