
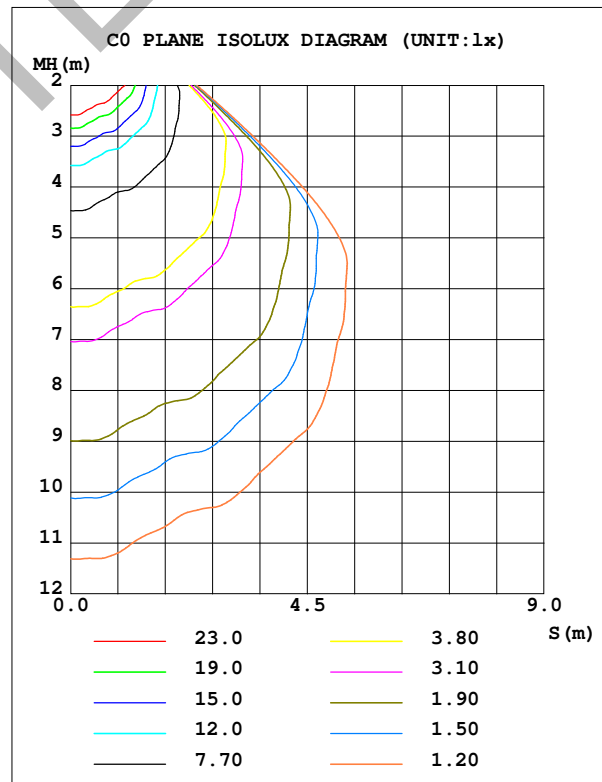


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.48V I:0.0130A P:2.8545W PF:0.9522 Freq:49.99Hz Lamp Flux:457.3x1 lm		
NAME: SUDO MINI - SLOT FRAME	TYPE:PATH FINDERS	WEIGHT:0.412kg
SPEC.:WW, NICHIA	DIM.: 76 x 87 x 130	SERIAL No.:2148
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 14.13 lm/W
MODEL	KL-2761	I <sub>max</sub> (cd)	159.4	S/MH (C0/180)	0.85	
NOMINAL POWER (W)	3	LOR (%)	8.8	S/MH (C90/270)	0.10	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	40.338	η UP, DN (C0-180)	0.0, 6.4	
NOMINAL FLUX (lm)	457.3	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 2.4	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	8.8	CIBSE SHR MAX	1.00	

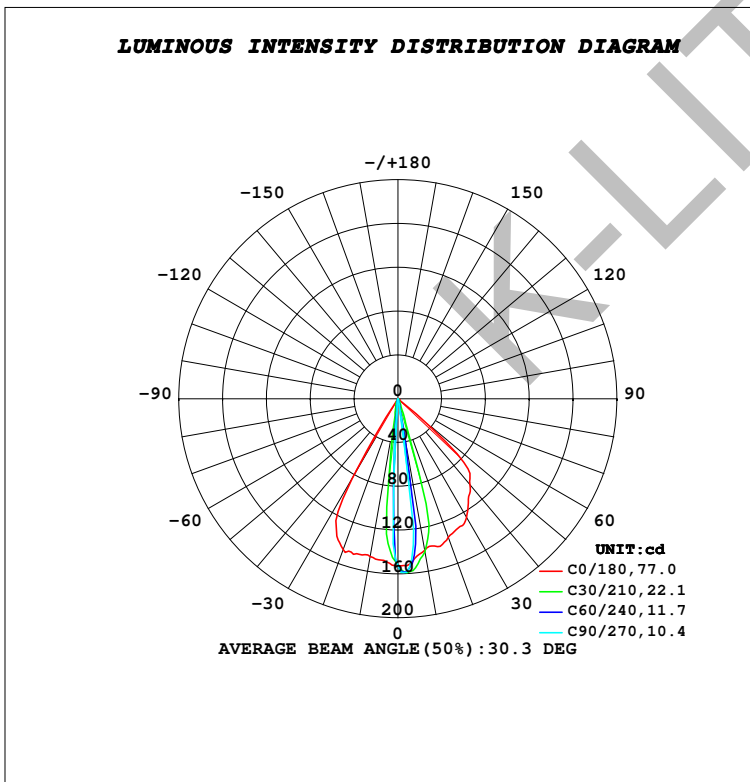

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 20 October 2020

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 65.0%  
 Test Distance: 1.825m [K=1.0000]  
 Remarks: