
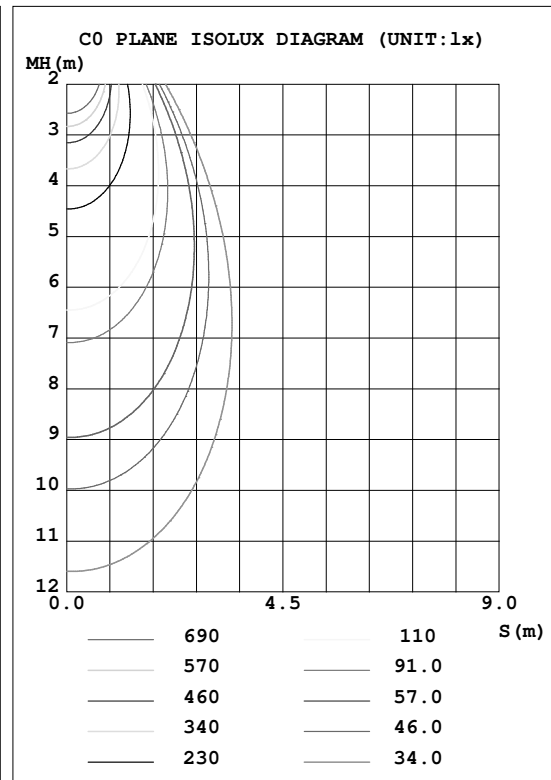


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|---|----------------------|---------------------------|
| Test:U:230.46V I:0.4230A P:39.017W PF:0.4002 Freq:49.99Hz Lamp Flux:5680x1 lm | | |
| NAME: LINEAR WALL WASHER | TYPE:LINEAR LIGHTING | WEIGHT: |
| SPEC.:WW, NICHIA | DIM.: 1000 x 35 x 78 | SERIAL No.:1359 |
| MFR.: K-LITE | SUR.: | Shielding Angle:15° x 60° |

| DATA OF LAMP | | PHOTOMETRIC DATA | | | | Eff: 63.40 lm/W |
|-------------------|---------|-----------------------|--------|---------------------|-----------|-----------------|
| MODEL | KL-3068 | I _{max} (cd) | 4882 | S/MH (C0/180) | 0.77 | |
| NOMINAL POWER (W) | 36 | LOR (%) | 43.6 | S/MH (C90/270) | 0.55 | |
| RATED VOLTAGE (V) | 230 | TOTAL FLUX (lm) | 2473.7 | η UP, DN (C0-180) | 0.0, 20.2 | |
| NOMINAL FLUX (lm) | 5680 | CIE CLASS | DIRECT | η UP, DN (C180-360) | 0.0, 23.4 | |
| LAMPS INSIDE | 1 | η up (%) | 0.0 | CIBSE SHR NOM | 0.50 | |
| TEST VOLTAGE (V) | 230 | η down (%) | 43.6 | CIBSE SHR MAX | 0.55 | |

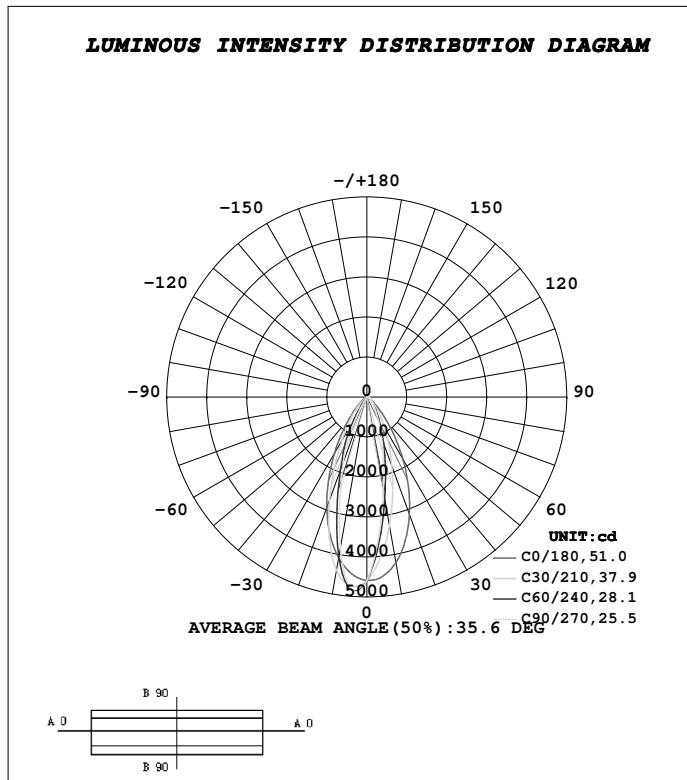

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 02 June 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: