


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.39V I:0.1285A P:12.241W PF:0.4133 Freq:59.98Hz Lamp Flux:1408x1 lm		
NAME: FORM-26	TYPE: LINEAR LIGHTING	WEIGHT:
SPEC.: WW, NICHIA	DIM.: 610 x 26 x 38	SERIAL No.: 3583
MFR.: K-LITE	SUR.:	Shielding Angle: 100°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3245	Imax (cd)	101.3	S/MH (C0/180)	1.29
NOMINAL POWER (W)	12	LOR (%)	21.9	S/MH (C90/270)	1.25
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	307.67	η UP, DN (C0-180)	0.2, 10.7
NOMINAL FLUX (lm)	1408	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.2, 10.7
LAMPS INSIDE	1	η up (%)	0.5	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	21.4	CIBSE SHR MAX	1.35

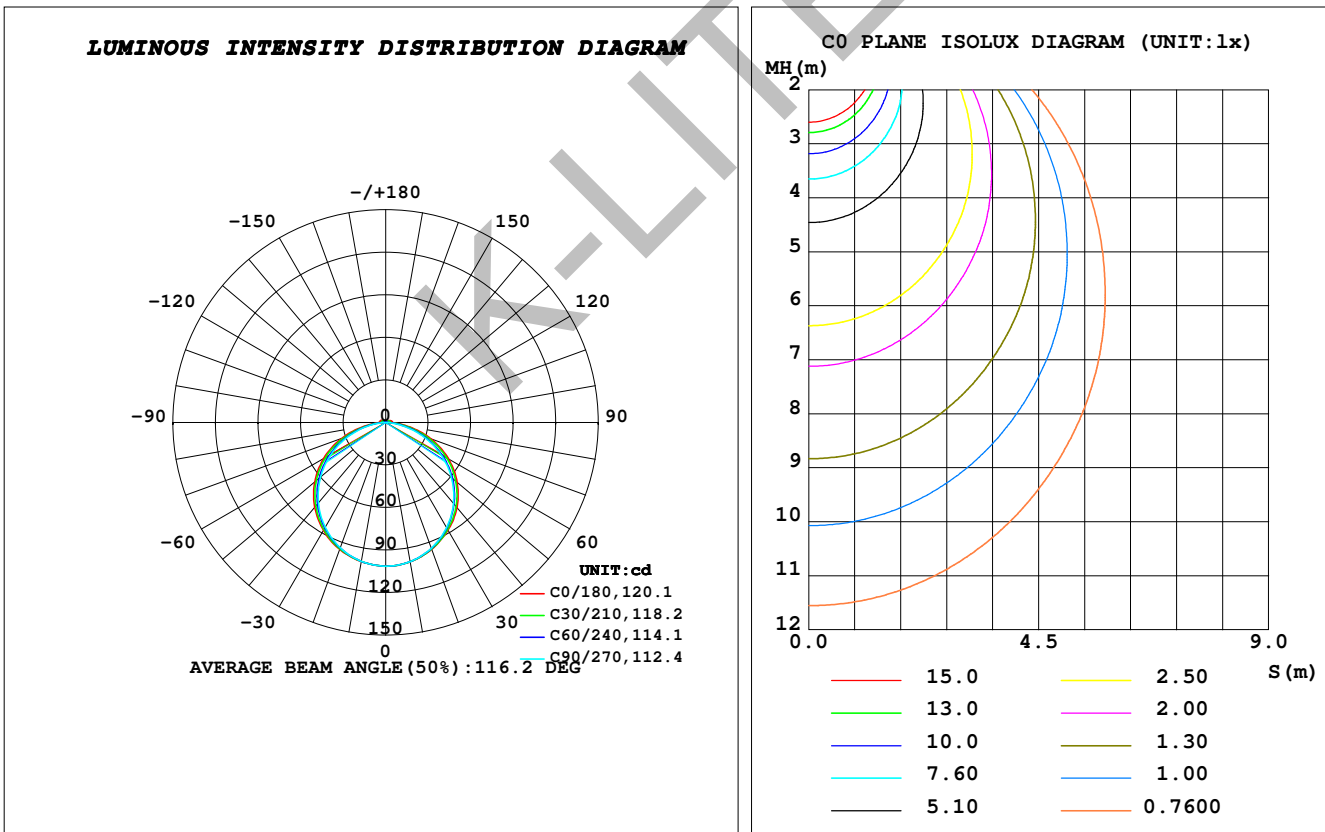

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 25 September 2021

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: