



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.35V I:0.0698A P:12.894W PF:0.8014 Freq:49.99Hz Lamp Flux:1507.5x1 lm		
NAME: PLATINA MINI - TRIMLESS	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: WW, CITIZEN	DIM.: Ø73 x 104	SERIAL No.: 2449
MFR.: K-LITE	SUR.:	Shielding Angle: 24°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 61.16 lm/W
MODEL	KL-3334	I _{max} (cd)	4269	S/MH (C0/180)	0.39	
NOMINAL POWER (W)	12	LOR (%)	52.3	S/MH (C90/270)	0.40	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	788.60	η UP, DN (C0-180)	0.0, 26.0	
NOMINAL FLUX (lm)	1507.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 26.3	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	52.3	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

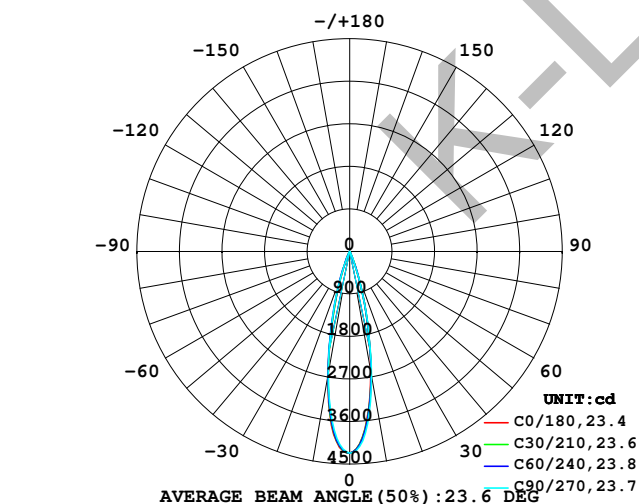

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

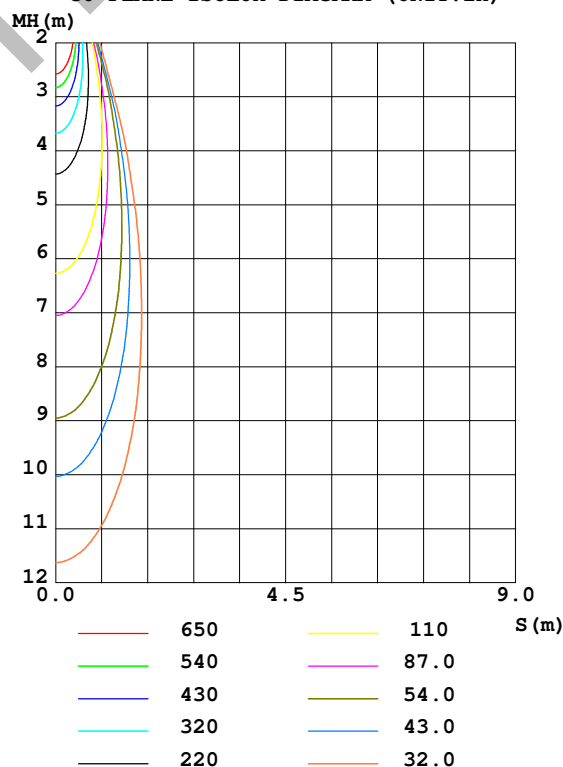

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 17 December 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: