



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.46V I:0.0442A P:9.9442W PF:0.9755 Freq:50.00Hz Lamp Flux:1084.18x1 lm		
NAME: PROXIMA	TYPE:CEILING LUMINAIRES	WEIGHT:
SPEC.:WW, CITIZEN	DIM.: Ø50 x 104 x 185	SERIAL No.:2094
MFR.: K-LITE	SUR.:	Shielding Angle:24°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 66.44 lm/W
MODEL	KL-3680	I _{max} (cd)	2165	S/MH (C0/180)	0.47	
NOMINAL POWER (W)	12	LOR (%)	60.9	S/MH (C90/270)	0.46	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	660.69	η UP, DN (C0-180)	0.0, 31.0	
NOMINAL FLUX (lm)	1084.18	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 30.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	230	η down (%)	60.9	CIBSE SHR MAX	0.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

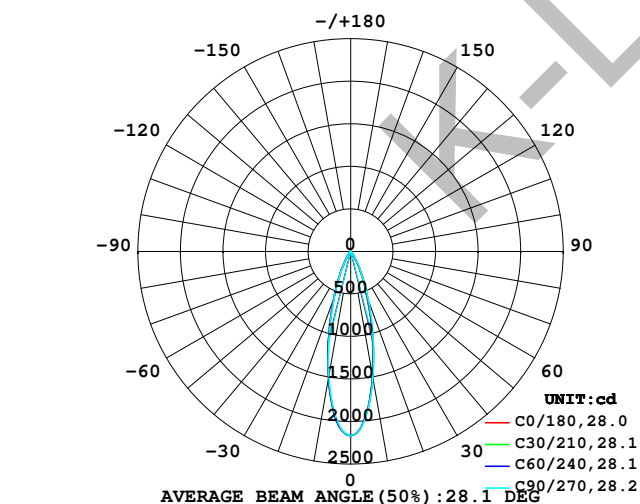

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

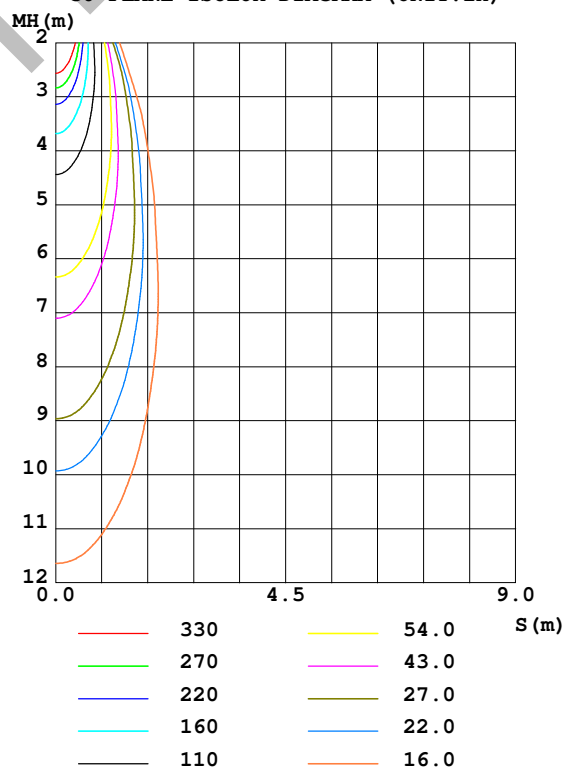

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 05 October 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: