
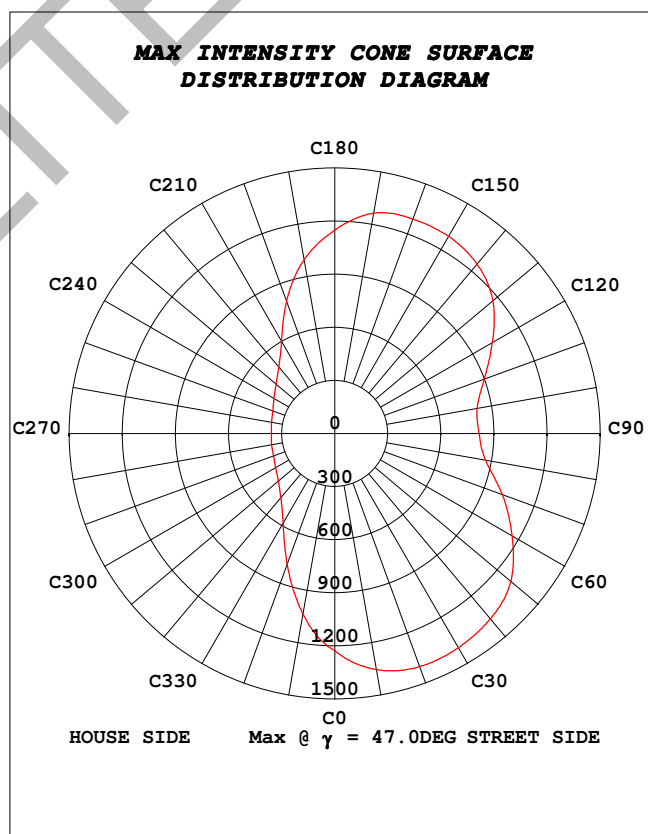


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.36V I:0.1359A P:31.008W PF:0.9904 Freq:49.99Hz Lamp Flux:3625.7x1 lm		
NAME: AMY	TYPE:POLE MOUNTED SYSTEMS	WEIGHT:
SPEC.:CW, EPISTAR	DIM.: 320 x 135 x 51	SERIAL No.:1420
MFR.: K-LITE	SUR.:	Shielding Angle:TYPE III

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 96.84 lm/W
MODEL	KL-4293	I _{max} (cd)	1402	η street_up (%)	0.0	
NOMINAL POWER (W)	30	LOR (%)	82.8	η street_down (%)	53.0	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3003	η house_up (%)	0.0	
NOMINAL FLUX (lm)	3625.7	MAXIMUM @ (C, γ)	20,47.0	η house_down (%)	29.9	
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m ²)	0.00100	
TEST VOLTAGE (V)	230	η down (%)	82.8	SLI	18.046	

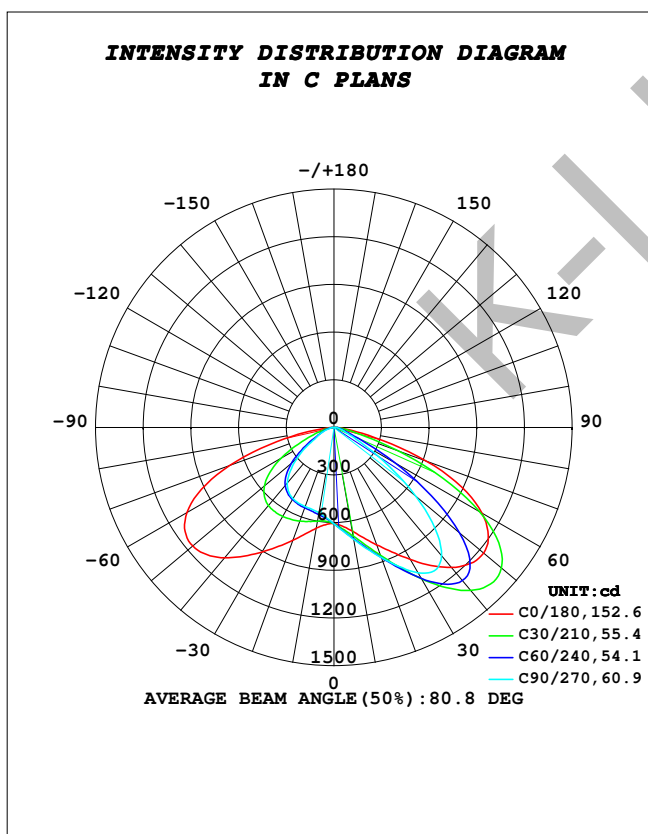

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 06 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: