


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.55V I:0.0278A P:6.2686W PF:0.9793 Freq:49.99Hz Lamp Flux:1036.8x1 lm		
NAME: SUDO MINI - OPEN FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 130 x 87 x 76	SERIAL No.:4867
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2745	Imax (cd)	104.3	S/MH (C0/180)	1.26
NOMINAL POWER (W)	6	LOR (%)	28.2	S/MH (C90/270)	1.20
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	292.29	η UP, DN (C0-180)	0.0, 14.7
NOMINAL FLUX (lm)	1036.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 13.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	28.2	CIBSE SHR MAX	1.35

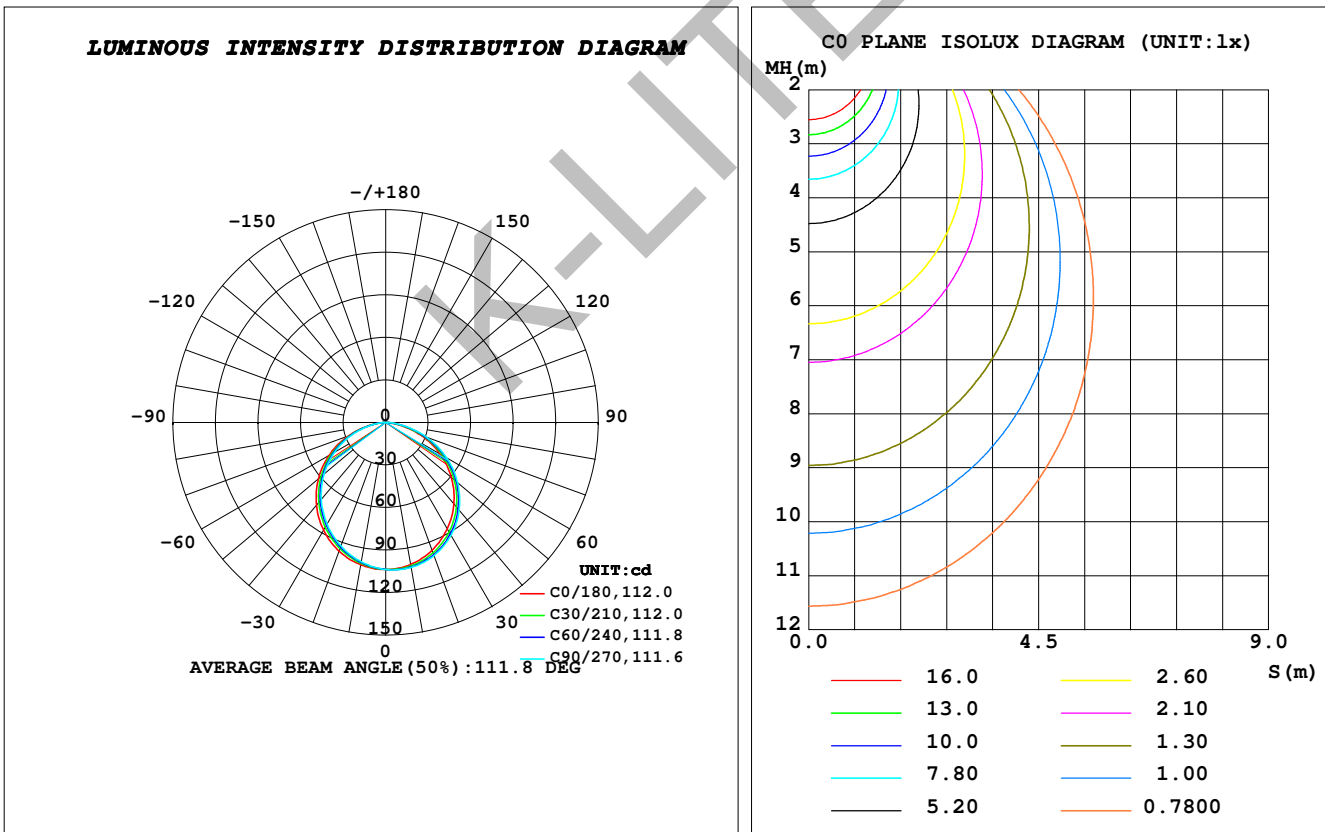

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 02 September 2022

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.852m [K=1.0000]
 Remarks: