
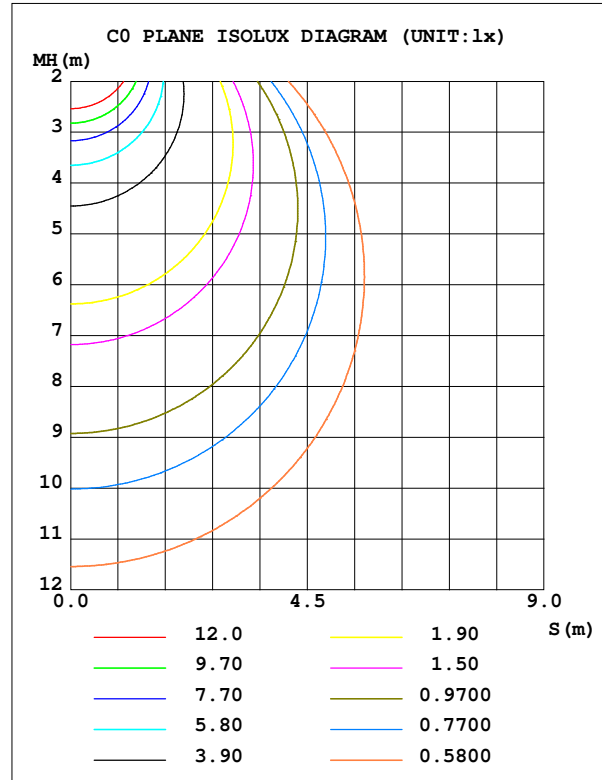


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.46V I:0.0285A P:6.4430W PF:0.9808 Freq:49.99Hz Lamp Flux:741.6x1 lm		
NAME: SUDO MINI-OPEN FRAME	TYPE:PATH FINDERS	WEIGHT:0.435kg
SPEC.:2700K, NICHIA, CRI 80	DIM.: 130 x 87 x 76	SERIAL No.:INT/2023/10/110
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 33.78 lm/W
MODEL	KL-2745	I _{max} (cd)	77.43	S/MH (C0/180)		1.25
NOMINAL POWER (W)	6	LOR (%)	29.4	S/MH (C90/270)		1.24
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	217.67	η UP, DN (C0-180)		0.0, 14.7
NOMINAL FLUX (lm)	741.6	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 14.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		1.25
TEST VOLTAGE (V)	230	η down (%)	29.4	CIBSE SHR MAX		1.35

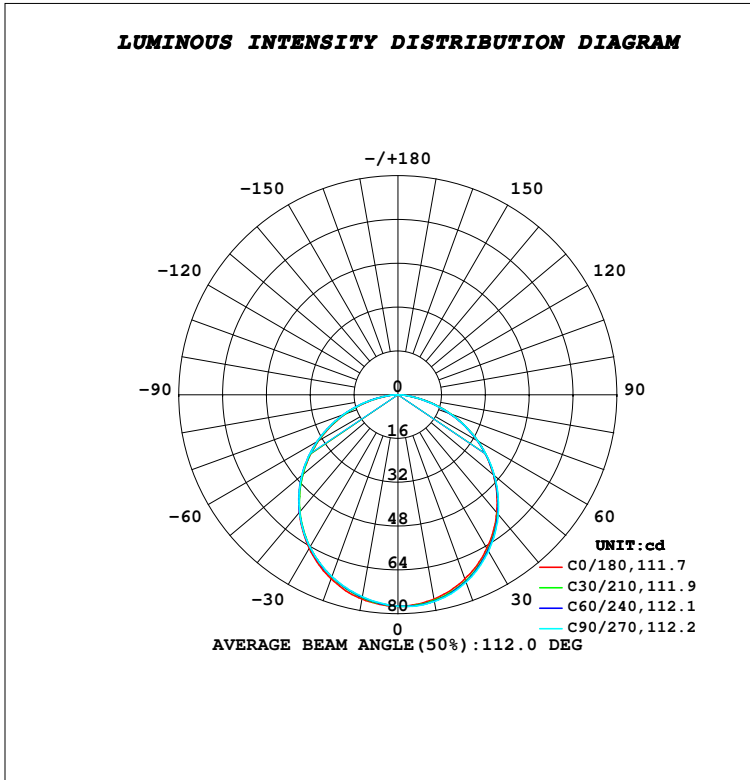

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.6DEG
 Operators:K-LITE
 Test Date:29 October 2023

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 39.2%
 Test Distance:1.935m [K=1.0000]
 Remarks: