


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.57V I:0.0281A P:6.3549W PF:0.9801 Freq:49.99Hz Lamp Flux:1036.8x1 lm		
NAME: SUDO MINI - ASY FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 130 x 87 x 76	SERIAL No.:4864
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2747	Imax (cd)	299.6	S/MH (C0/180)	1.32
NOMINAL POWER (W)	6	LOR (%)	35.3	S/MH (C90/270)	0.97
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	366.16	η UP, DN (C0-180)	0.0, 30.4
NOMINAL FLUX (lm)	1036.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 4.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	35.3	CIBSE SHR MAX	1.00

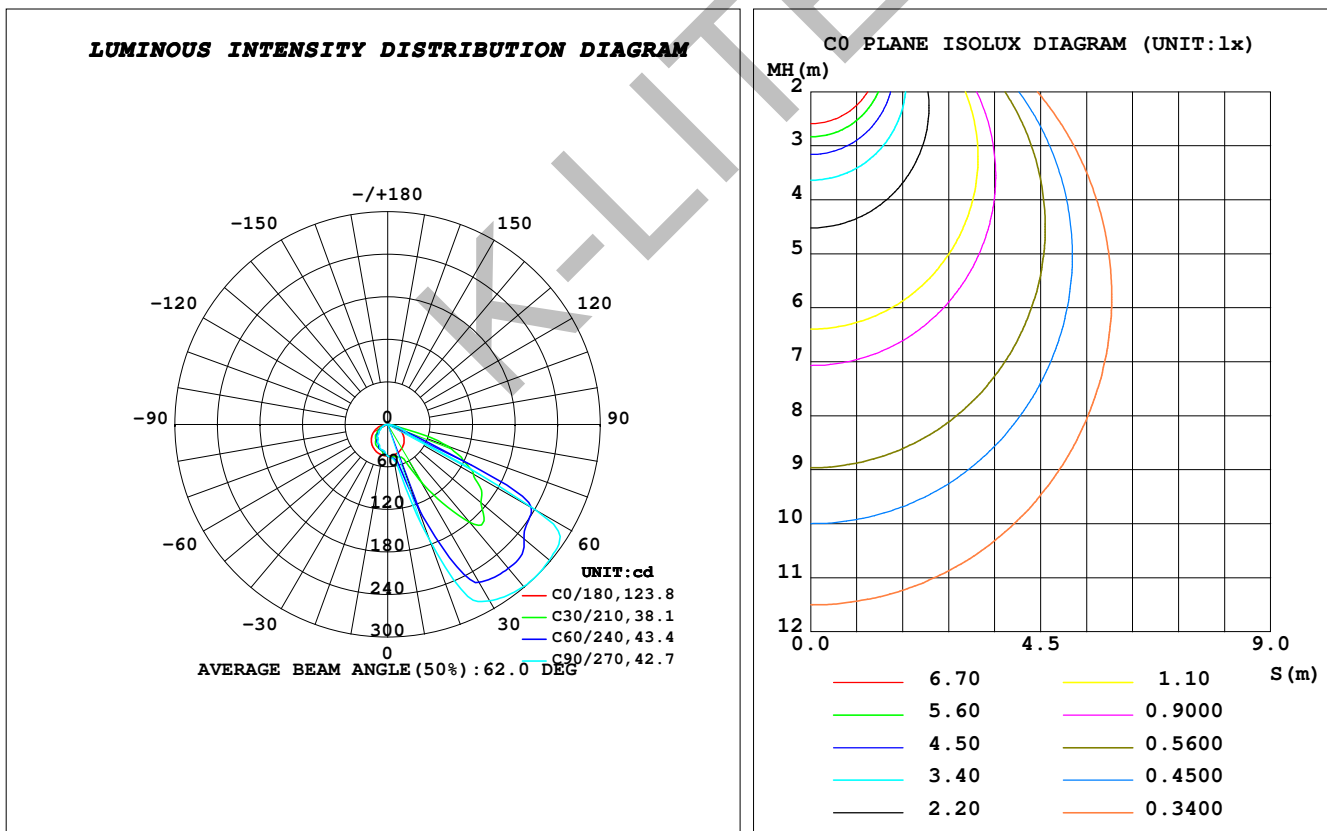

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 02 September 2022

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 65.0%  
 Test Distance: 1.852m [K=1.0000]  
 Remarks: