
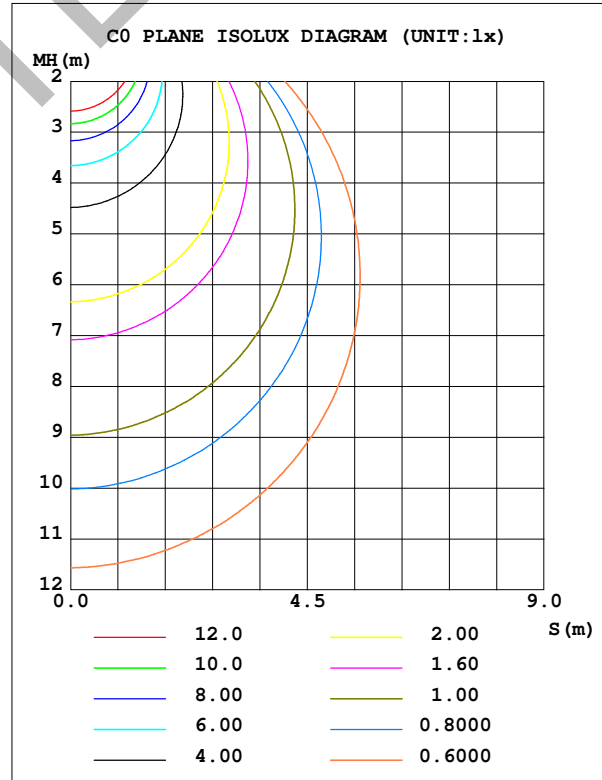


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.21V I:0.0677A P:7.1275W PF:0.9825 Freq:49.99Hz Lamp Flux:871.02x1 lm		
NAME: SUDO - OPEN FRAME	TYPE:PATH FINDERS	WEIGHT:0.8Kg
SPEC.:WW, NICHIA	DIM.: 255 x 87 x 76	SERIAL No.:1032
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 31.07 lm/W
MODEL	KL-2753	I _{max} (cd)	80.30	S/MH (C0/180)		1.26
NOMINAL POWER (W)	6	LOR (%)	25.4	S/MH (C90/270)		1.23
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	221.48	η UP, DN (C0-180)		0.0, 12.8
NOMINAL FLUX (lm)	871.02	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 12.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		1.25
TEST VOLTAGE (V)	230	η down (%)	25.4	CIBSE SHR MAX		1.35

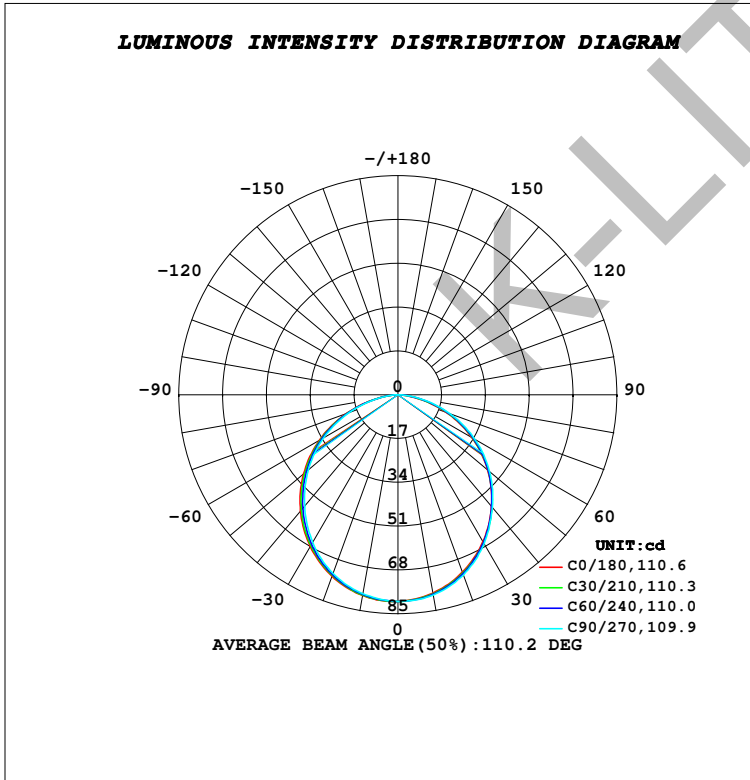

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 30 January 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.944m [K=1.0000]
 Remarks: