
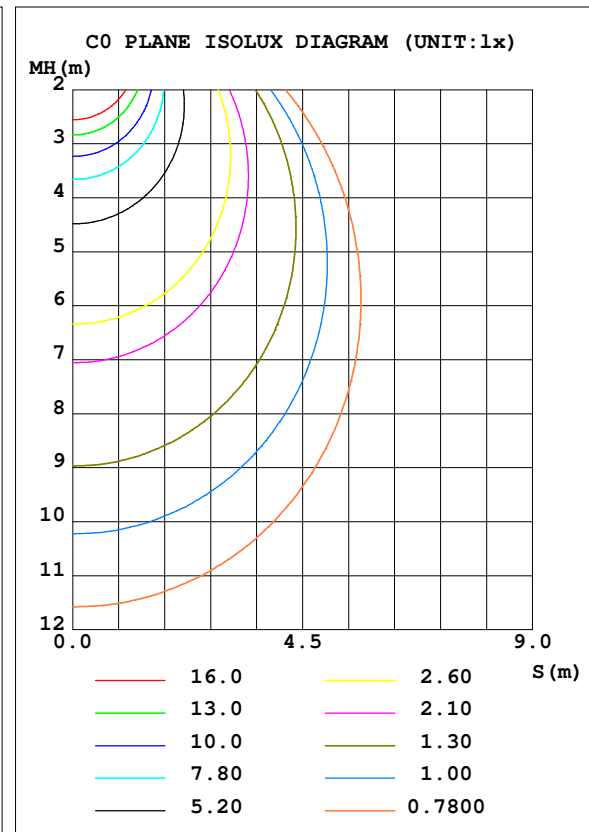


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.49V I:0.0290A P:6.5535W PF:0.9812 Freq:50.00Hz Lamp Flux:1038.58x1 lm		
NAME: SUDO-OPEN FRAME	TYPE:PATH FINDERS	WEIGHT:0.705kg
SPEC.:3000K, NICHIA, CRI 80	DIM.: 255 x 87 x 76	SERIAL No.:INT/2024/07/86
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 45.01 lm/W
MODEL	KL-2753	I _{max} (cd)	104.7	S/MH (C0/180)	1.25	
NOMINAL POWER (W)	6	LOR (%)	28.4	S/MH (C90/270)	1.23	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	294.94	η UP, DN (C0-180)	0.0, 14.2	
NOMINAL FLUX (lm)	1038.58	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 14.2	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	230	η down (%)	28.4	CIBSE SHR MAX	1.35	

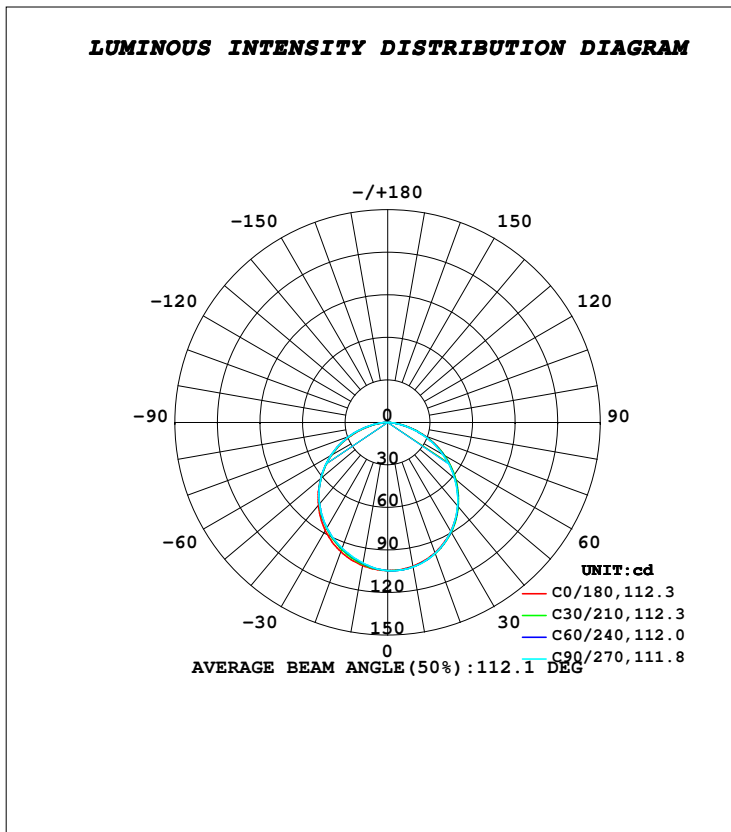

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.8DEG
Operators:K-LITE
Test Date:14 August 2024

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 49.9%
Test Distance:2.001m [K=1.0000]
Remarks: