


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.50V I:0.2247A P:23.862W PF:0.4607 Freq:50.00Hz Lamp Flux:3233.3x1 lm		
NAME: WALL GRAZER	TYPE:LINEAR IN-GROUND	WEIGHT:
SPEC.:WW, LUMILED	DIM.: 550 x 68 x 83	SERIAL No.:2100
MFR.: K-LITE	SUR.:	Shielding Angle:100°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3274	Imax (cd)	364.0	S/MH (C0/180)	1.21
NOMINAL POWER (W)	24	LOR (%)	27.2	S/MH (C90/270)	1.19
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	878.55	η UP, DN (C0-180)	0.0, 13.4
NOMINAL FLUX (lm)	3233.3	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 13.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	27.2	CIBSE SHR MAX	1.35

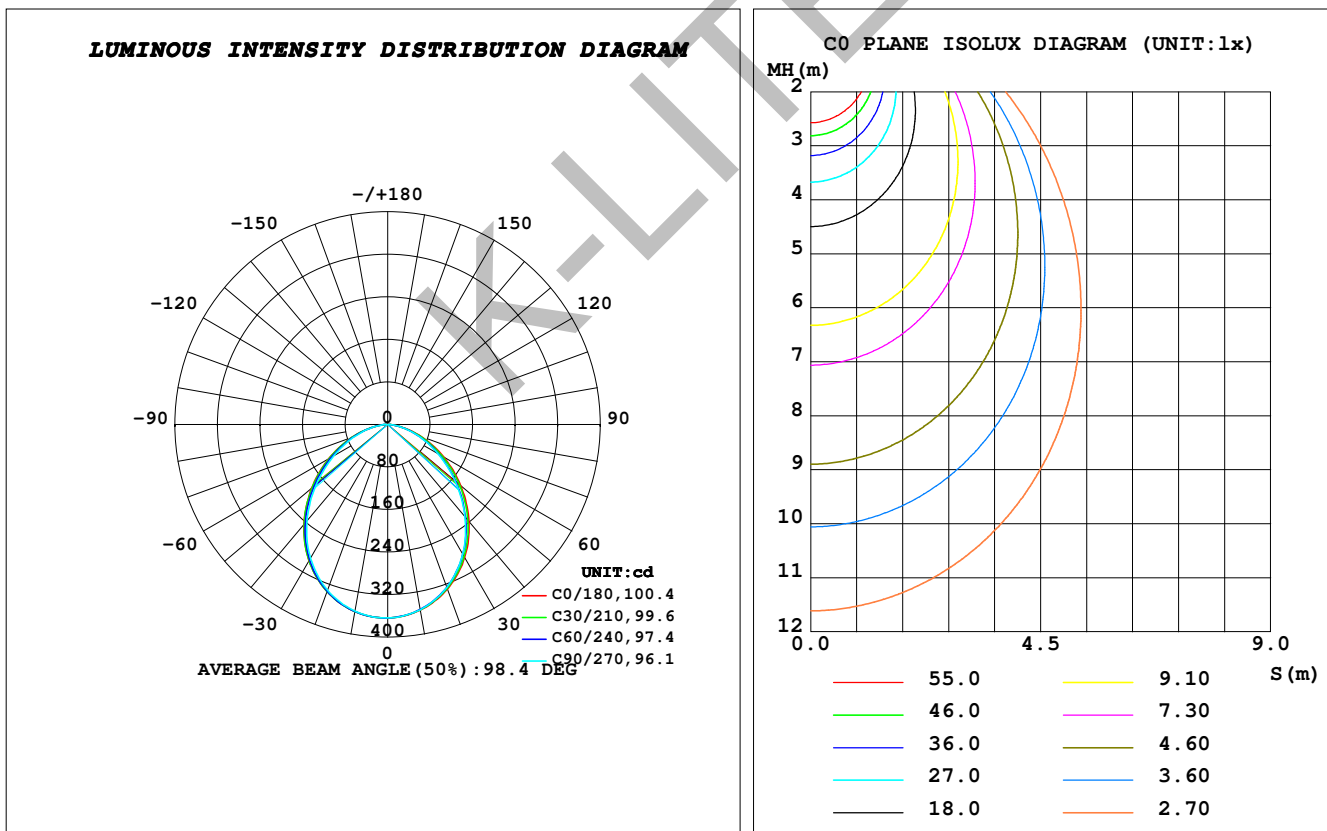

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 07 October 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: