


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.41V I:0.4808A P:43.889W PF:0.3962 Freq:50.00Hz Lamp Flux:6258.9x1 lm		
NAME: WALL GRAZER	TYPE:LINEAR IN-GROUND	WEIGHT:
SPEC.:WW, LUMILED	DIM.: 1025 x 68 x 83	SERIAL No.:1871
MFR.: K-LITE	SUR.:	Shielding Angle:100°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3275	Imax (cd)	251.2	S/MH (C0/180)	1.32
NOMINAL POWER (W)	48	LOR (%)	11.9	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	742.04	η UP, DN (C0-180)	0.0, 6.0
NOMINAL FLUX (lm)	6258.9	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 5.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	11.9	CIBSE SHR MAX	1.35

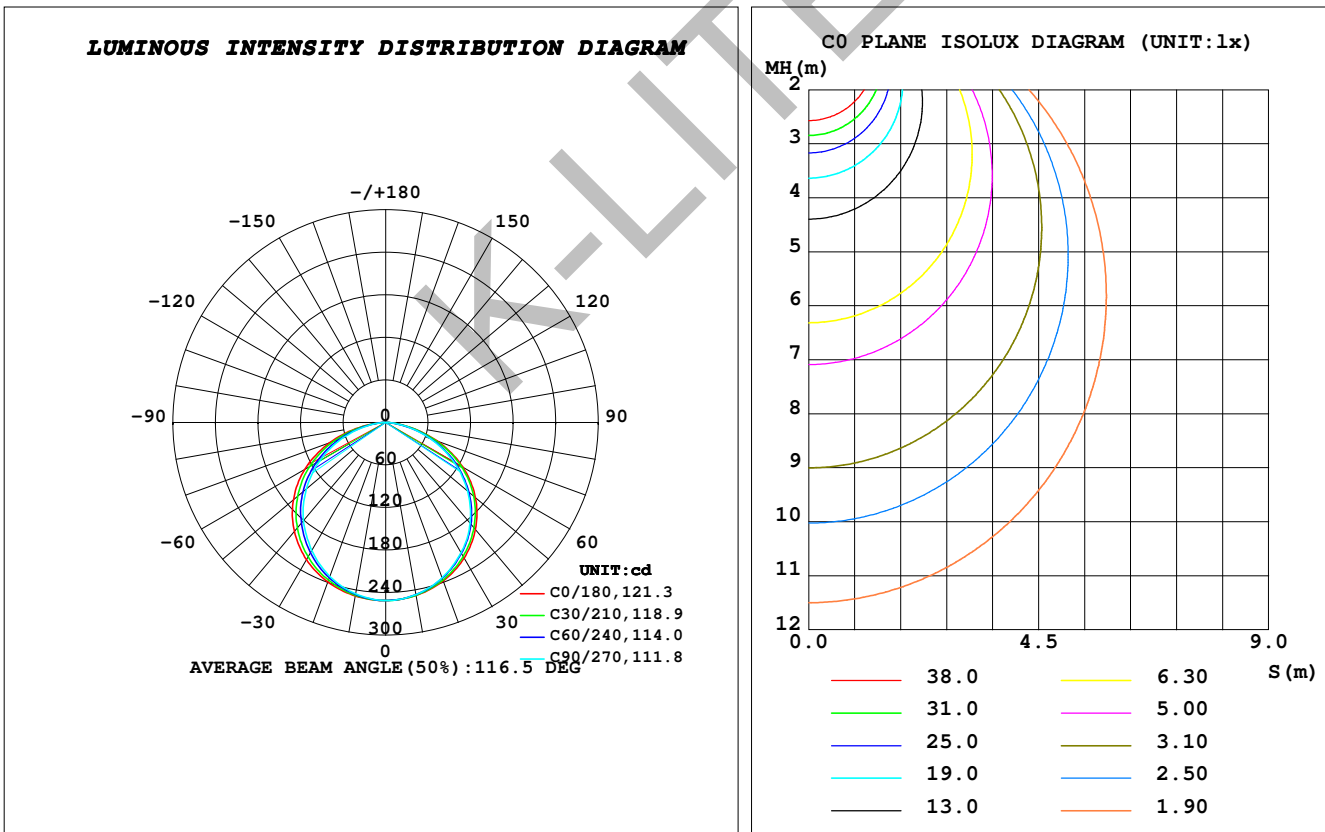

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 10 September 2020**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**