


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.35V I:0.2284A P:24.255W PF:0.4610 Freq:50.00Hz Lamp Flux:3293.75x1 lm		
NAME: WALL GRAZER	TYPE:LINEAR IN-GROUND	WEIGHT:
SPEC.:WW, LUMILED	DIM.: 1025 x 68 x 83	SERIAL No.:1528
MFR.: K-LITE	SUR.:	Shielding Angle:100°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3277	Imax (cd)	221.2	S/MH (C0/180)	1.32
NOMINAL POWER (W)	24	LOR (%)	19.9	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	656.13	η UP, DN (C0-180)	0.0, 9.8
NOMINAL FLUX (lm)	3293.75	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 10.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	19.9	CIBSE SHR MAX	1.35

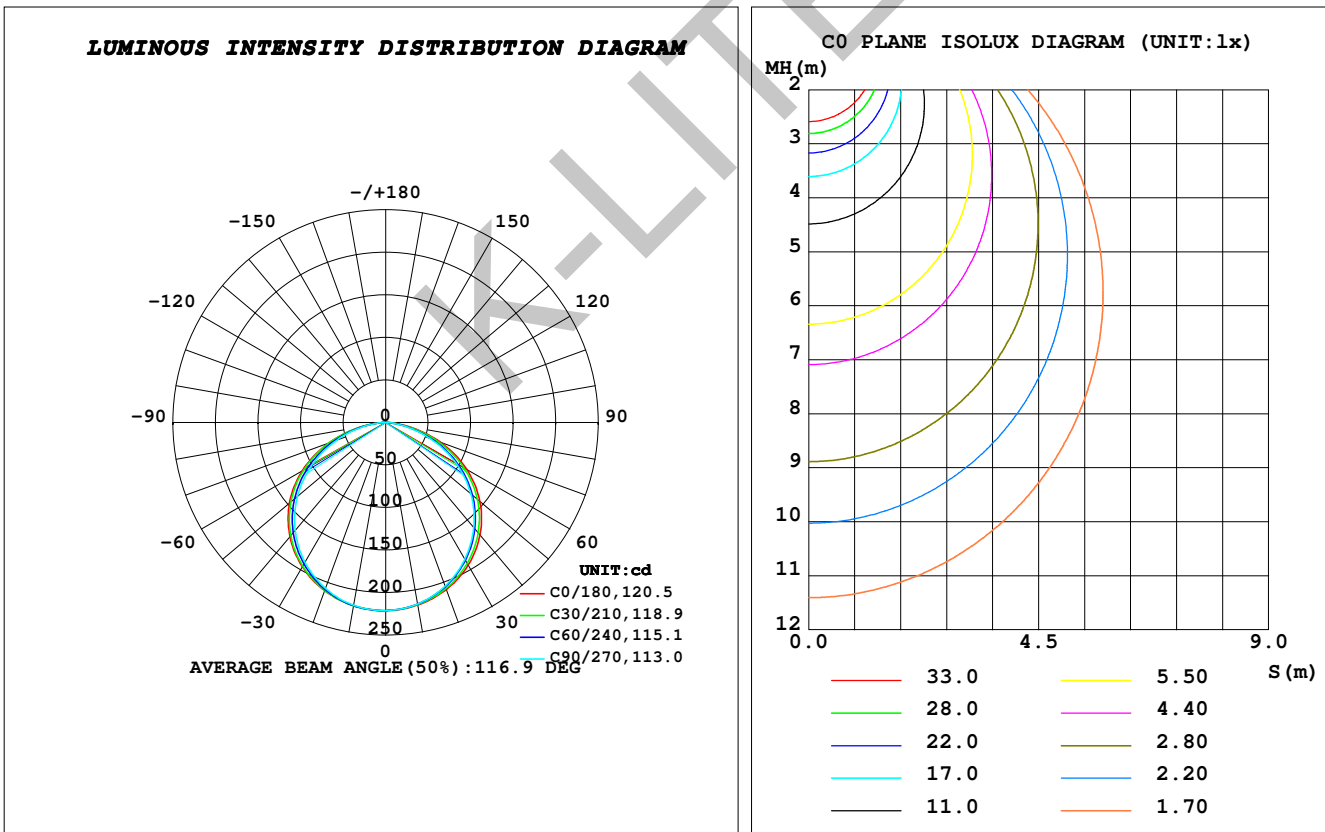

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 21 July 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: