



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.41V I:0.0289A P:6.3355W PF:0.9516 Freq:49.99Hz Lamp Flux:765x1 lm		
NAME: PLATINA MICRO - TRIMLESS	TYPE: RECESSED CEILING	WEIGHT:
SPEC.: WW, CITIZEN	DIM.: Ø50 x 75	SERIAL No.: 2448
MFR.: K-LITE	SUR.:	Shielding Angle: 24°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 66.61 lm/W
MODEL	KL-3333	I _{max} (cd)	2877	S/MH (C0/180)	0.34	
NOMINAL POWER (W)	6	LOR (%)	55.2	S/MH (C90/270)	0.36	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	422.03	η UP, DN (C0-180)	0.0, 27.3	
NOMINAL FLUX (lm)	765	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 27.9	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	55.2	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

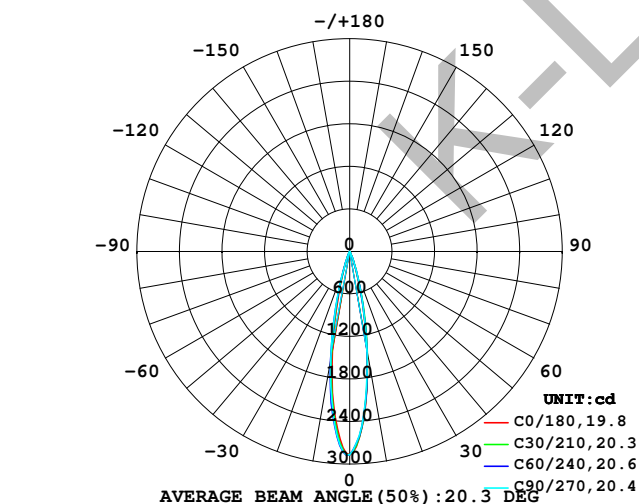

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

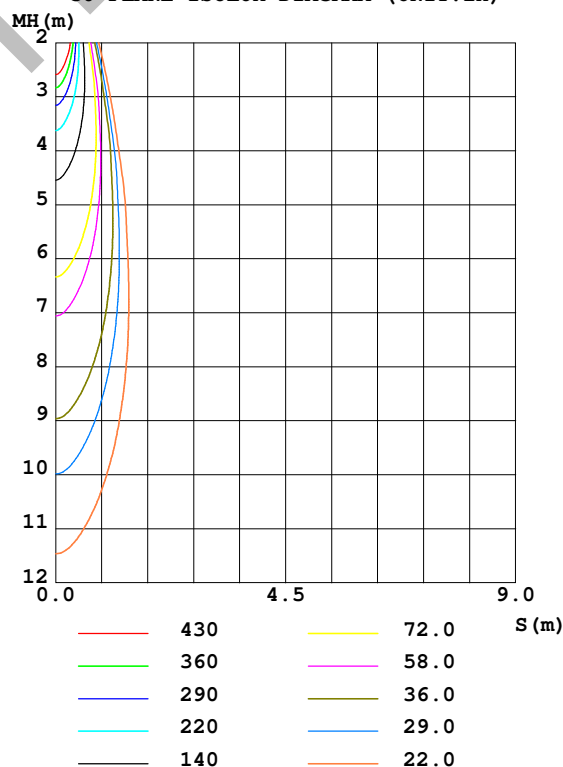

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 17 December 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: