


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.39V I:0.1888A P:39.949W PF:0.9186 Freq:49.98Hz Lamp Flux:3286.34x1 lm		
NAME: LEVO - S	TYPE:LINEAR LIGHTING	WEIGHT:
SPEC.:NW, LUMILED'S 2835	DIM.: 1220 x 50 x 35	SERIAL No.:1835
MFR.: K-LITE	SUR.:(PC OPAL MATTE)	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3408	Imax (cd)	1129	S/MH (C0/180)	1.32
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.20
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3286.3	η UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	3286.34	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	100.0	CIBSE SHR MAX	1.35

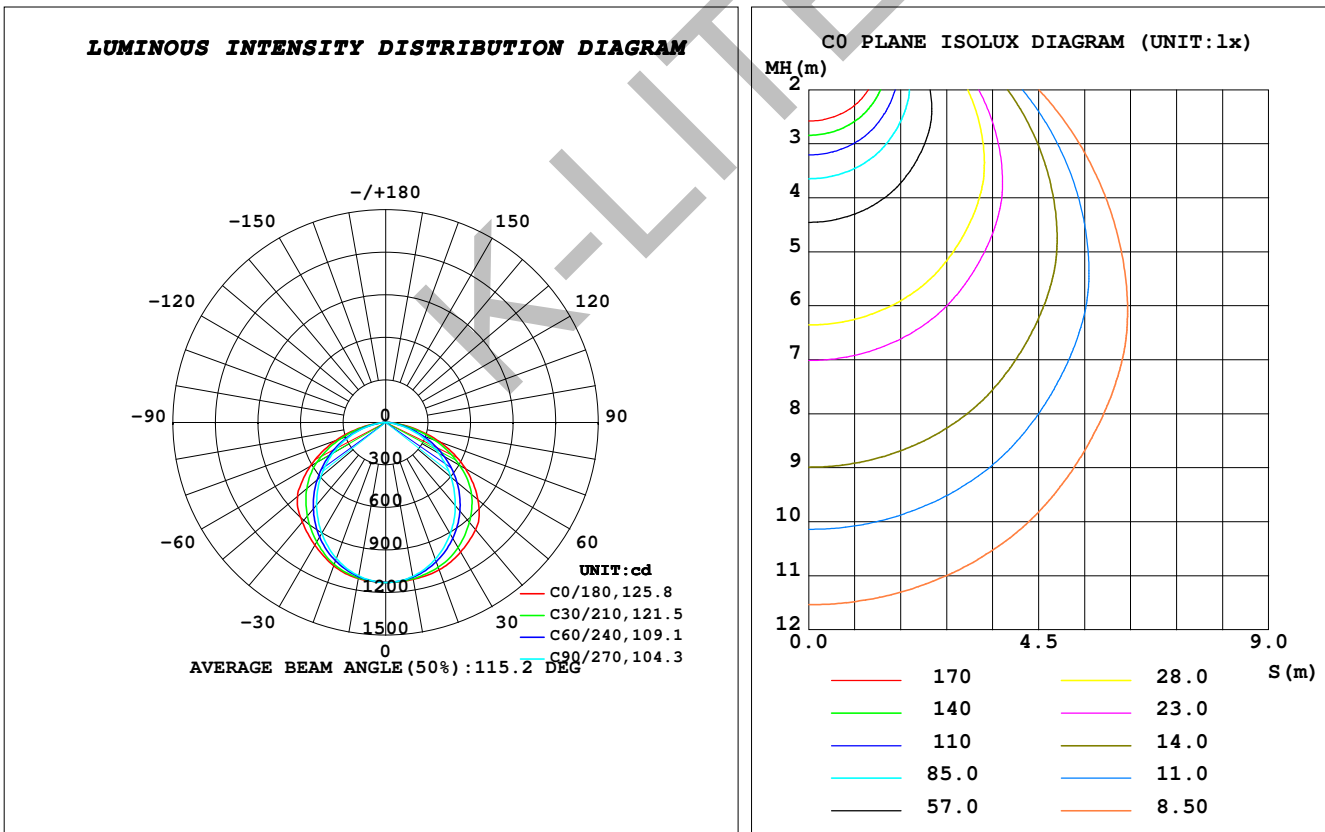

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 09 September 2020**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.836m [K=1.0000]**  
**Remarks:**