
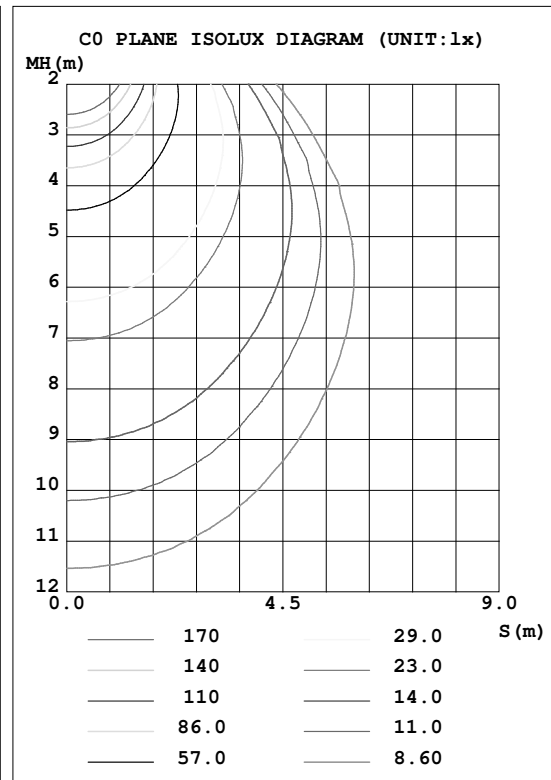


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.53V I:0.1805A P:40.068W PF:0.9630 Freq:50.00Hz Lamp Flux:5475x1 lm		
NAME: VIO-R	TYPE: LINEAR LIGHTING	WEIGHT:
SPEC.: CW, NICHIA	DIM.: 1215 x 62 x 45	SERIAL No.: 4372
MFR.: K-LITE	SUR.:	Shielding Angle: 110°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 75.93 lm/W
MODEL	KL-3543	I <sub>max</sub> (cd)	1139	S/MH (C0/180)	1.32	
NOMINAL POWER (W)	40	LOR (%)	55.6	S/MH (C90/270)	1.12	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3042.5	η UP, DN (C0-180)	0.0, 27.7	
NOMINAL FLUX (lm)	5475	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 27.9	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	230	η down (%)	55.6	CIBSE SHR MAX	1.35	

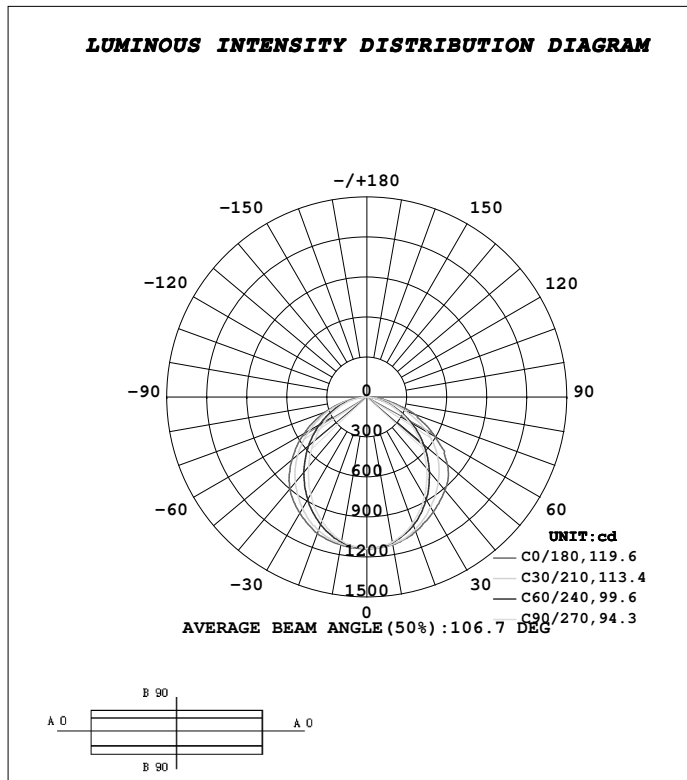

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 31 March 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**