


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.58V I:0.1572A P:36.047W PF:0.9946 Freq:49.99Hz Lamp Flux:5527.13x1 lm		
NAME: WALL CYLIN	TYPE:WALL LUMINAIRES	WEIGHT:
SPEC.:WW, CITIZEN, BA-15°	DIM.: 216 x 166 x 200	SERIAL No.:5139
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3652	Imax (cd)	26091	S/MH (C0/180)	0.22
NOMINAL POWER (W)	40	LOR (%)	52.6	S/MH (C90/270)	0.23
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2909.7	η UP, DN (C0-180)	0.0, 25.8
NOMINAL FLUX (lm)	5527.13	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 26.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	52.6	CIBSE SHR MAX	1.00

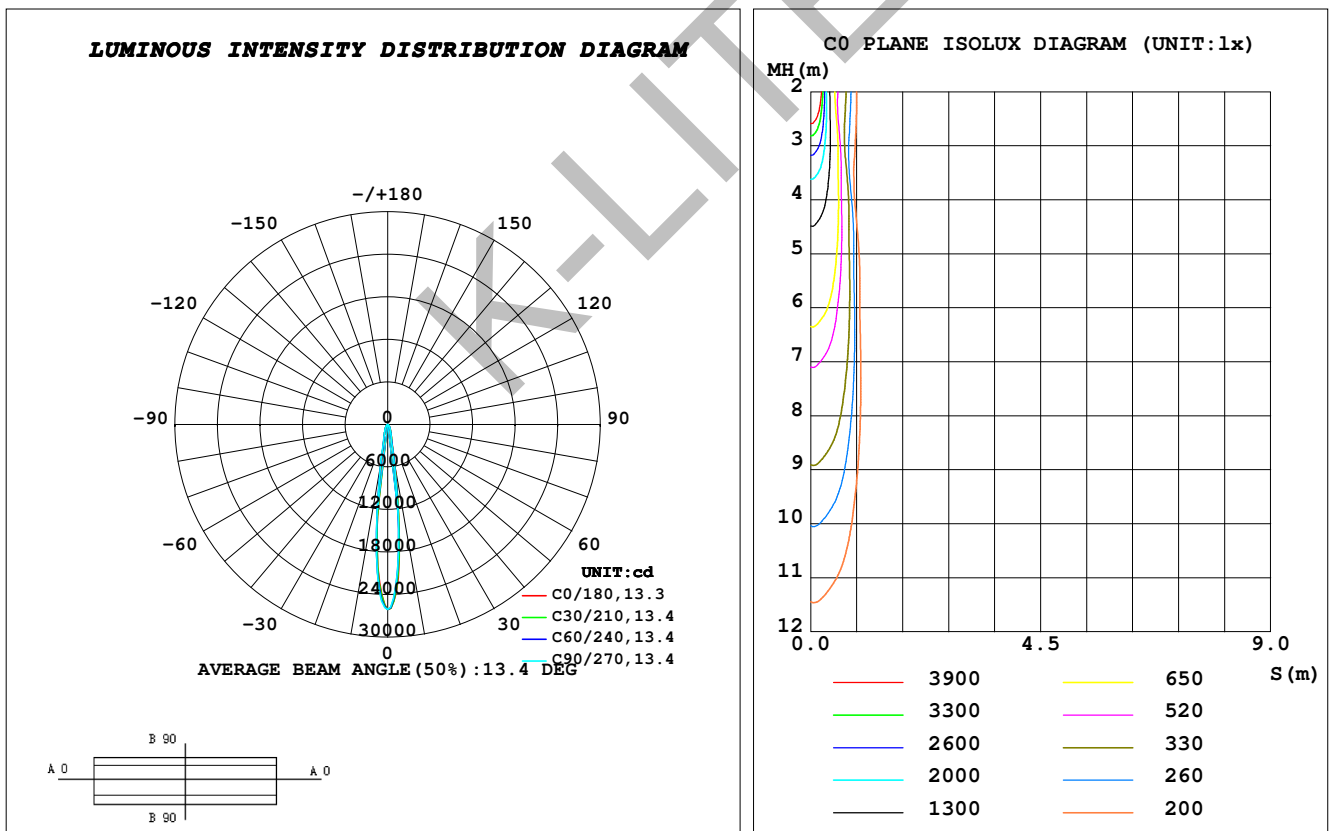

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 21 November 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.852m [K=1.0000]**  
**Remarks:**