


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|--|-----------------------|------------------|
| Test:U:230.63V I:0.1111A P:25.454W PF:0.9932 Freq:49.99Hz Lamp Flux:3976.59x1 lm | | |
| NAME: WALL CYLIN | TYPE:WALL LUMINAIRES | WEIGHT: |
| SPEC.:NW, CITIZEN, BA-25° | DIM.: 216 x 166 x 200 | SERIAL No.:5131 |
| MFR.: K-LITE | SUR.: | Shielding Angle: |

| DATA OF LAMP | | PHOTOMETRIC DATA | | | |
|-------------------|---------|------------------|--------|---------------------|-----------|
| MODEL | KL-3655 | Imax (cd) | 8656 | S/MH (C0/180) | 0.42 |
| NOMINAL POWER (W) | 25 | LOR (%) | 59.2 | S/MH (C90/270) | 0.43 |
| RATED VOLTAGE (V) | 230 | TOTAL FLUX (lm) | 2355.7 | η UP, DN (C0-180) | 0.0, 28.8 |
| NOMINAL FLUX (lm) | 3976.59 | CIE CLASS | DIRECT | η UP, DN (C180-360) | 0.0, 30.5 |
| LAMPS INSIDE | 1 | η up (%) | 0.0 | CIBSE SHR NOM | 0.00 |
| TEST VOLTAGE (V) | 230 | η down (%) | 59.2 | CIBSE SHR MAX | 1.00 |

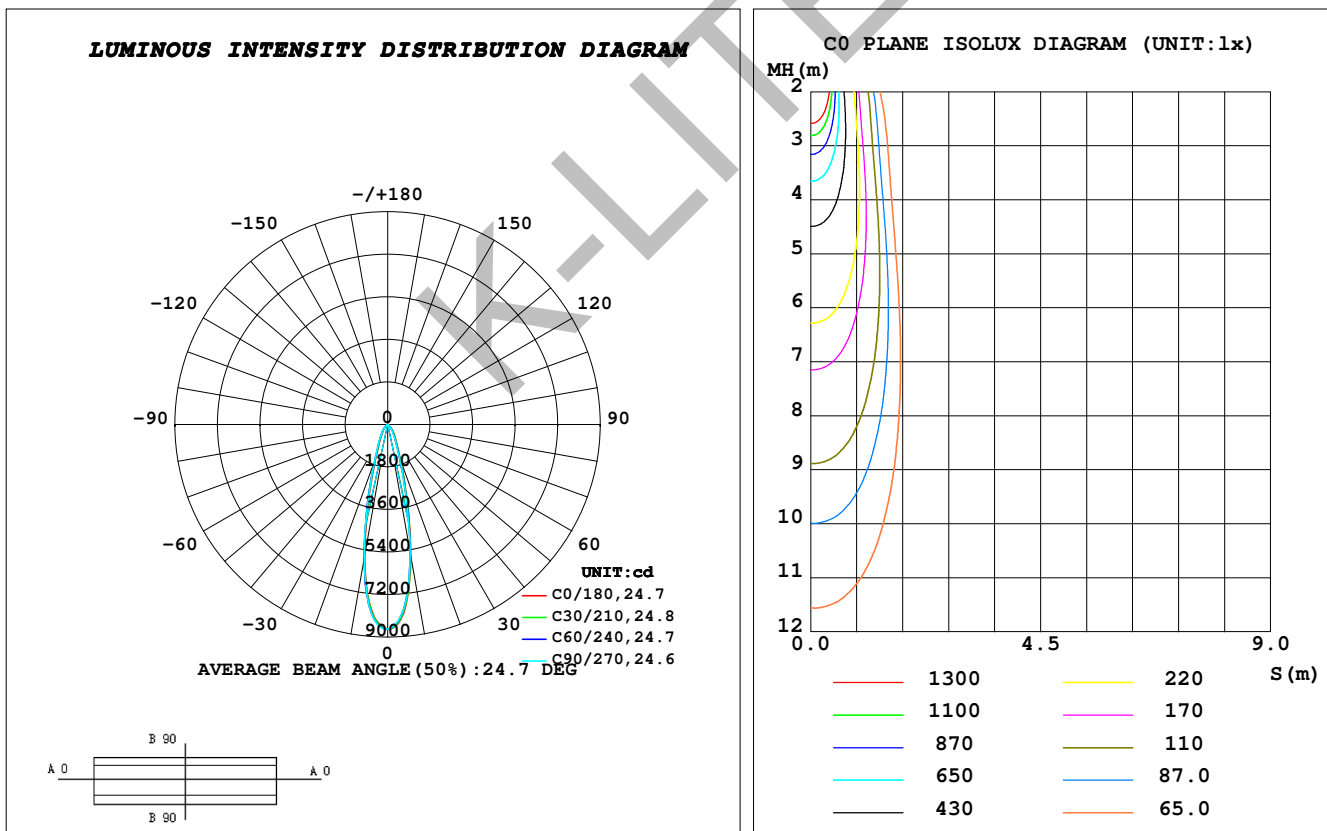

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 21 November 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: